



Floods & Lakes Monitoring

SAR part

Dr Hervé YESOU

D2Mw -L2

Tuesday 19 November 2019

ESA-MOST China Dragon 4 Cooperation

2019 ADVANCED INTERNATIONAL TRAINING COURSE IN LAND REMOTE SENSING

中欧科技合作“龙计划”第四期 2019年陆地遥感高级培训班

18 to 23 November 2019 | Chongqing University, P.R. China



培训时间:2019年11月18日-23日 主办方:重庆大学

Presentation outline

Introduction: Why water bodies and flood mapping and monitoring

Flood and lakes in the landscape

Short cut of Physical basis for Water bodies mapping

Elements for water bodies extraction based on SAR imagery

SAR sensors for water bodies and/or flood mapping

- **Past mission**
- **On going missions**
- **Future missions**


Flood plain and lakes monitoring

- **Short term Monitoring**
- **Long term monitoring**
- **Meteo climato parameters**

Concluding remarks

Why it is relevant to map and monitor flood events?



- **Floods: 34% world natural hazards between 1974-2003**
- **Near 200 millions of affected people each year (more than half of affected people by a natural hazards)**
- **More than 170 000 deceases from 1980 to 2000**
- **With climate change it would become worse**
- **Fitting floods is one of the most important environmental challenge**

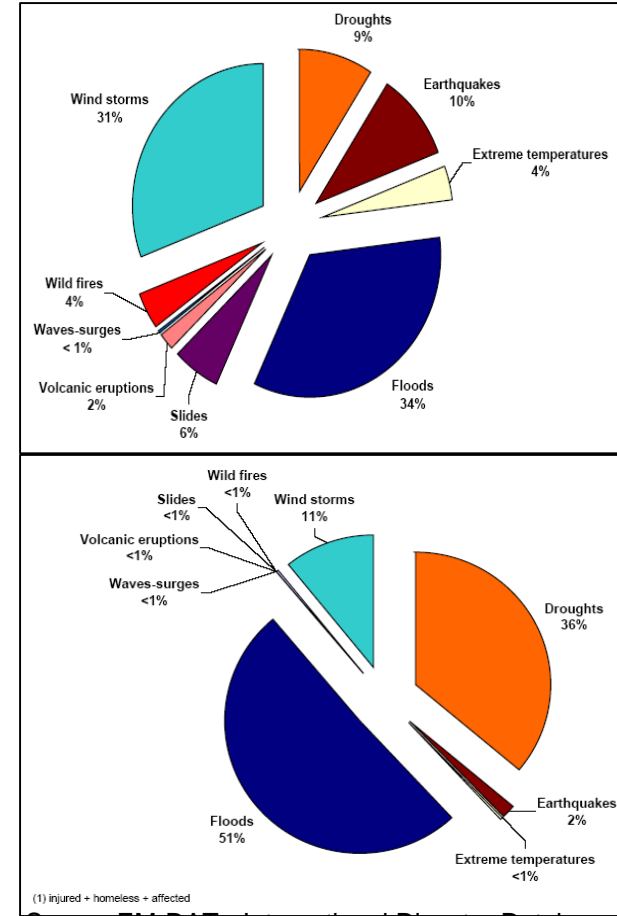

Source:EM-DAT - International Disaster Database

Why it is relevant to map and monitor flood events?


- **Floods: worldwide**
- **Important mortality in Asia, Central- South America, Eastern Africa**
- **Important economic losses in Europe, Northern America as well as Asia**
- **Most dramatic are not the most costly ones (Nargis: 140 000 , none insurance prime, whereas 2008 spring floods in US and Germany 1,1billion \$ each**

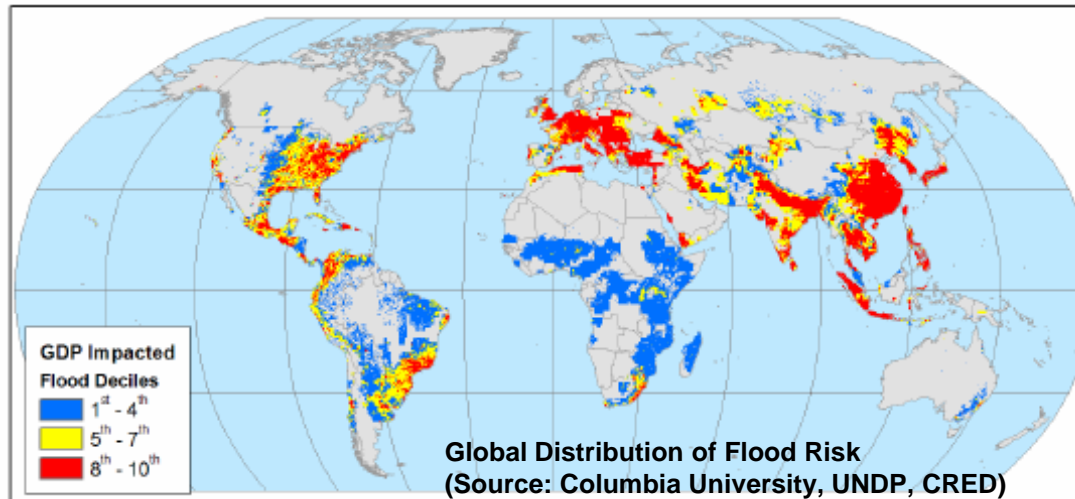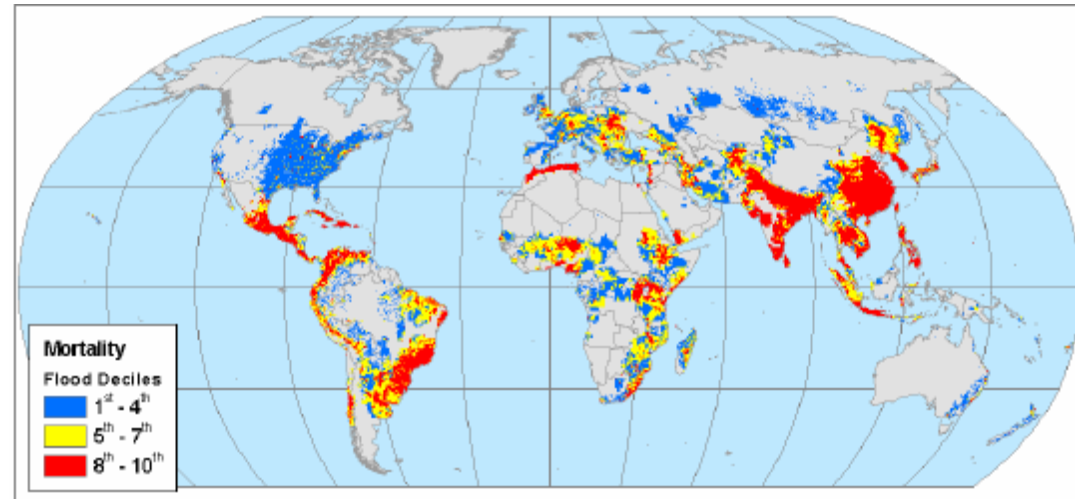


Global Distribution of Flood Risk
(Source: Columbia University, UNDP, CRED)

Why it is relevant to map and monitor flood events?

- Floods: Europe
- Central Europe
- British Islands
- South France


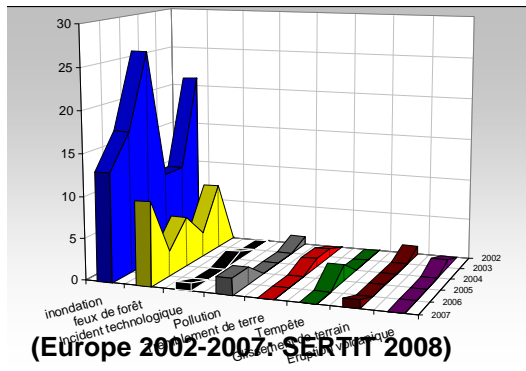


SERTIT MAJOR DISASTER DATABASE - European / Northern-Africa distribution

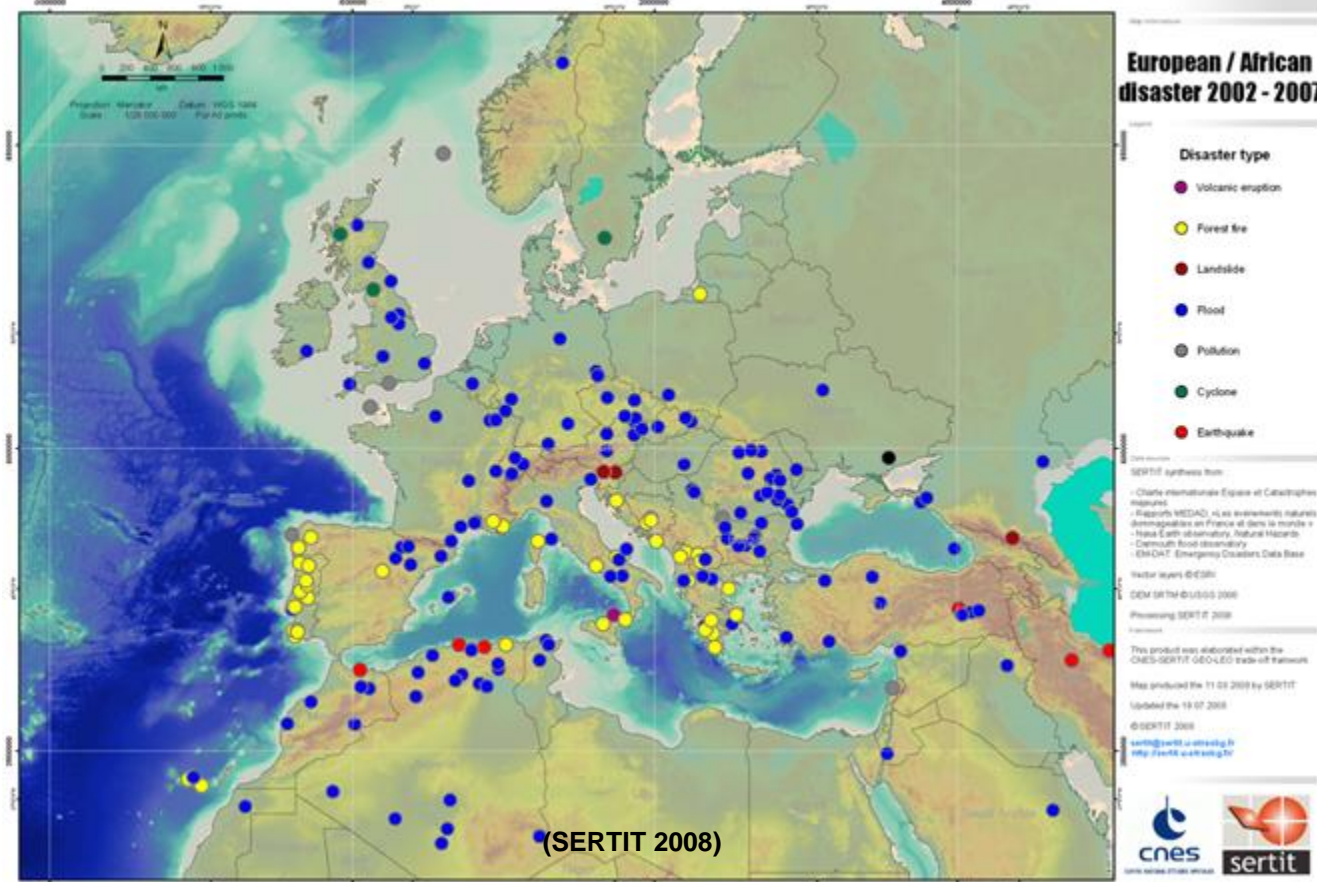

Why it is important to monitor water bodies?

Request to a secured resource allowing to monitoring large areas with a reduced revisiting time (10 days)

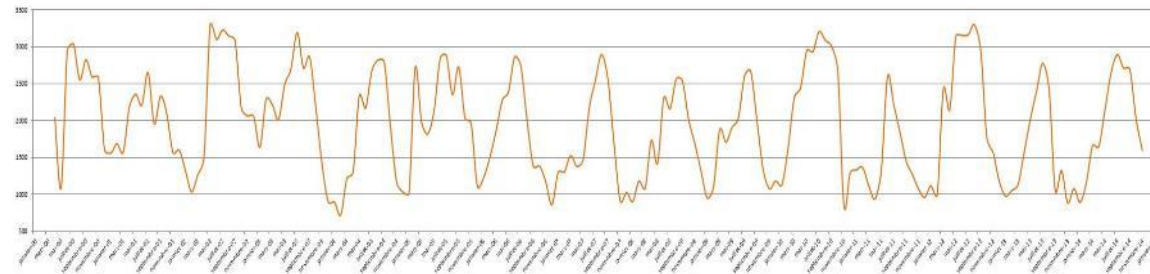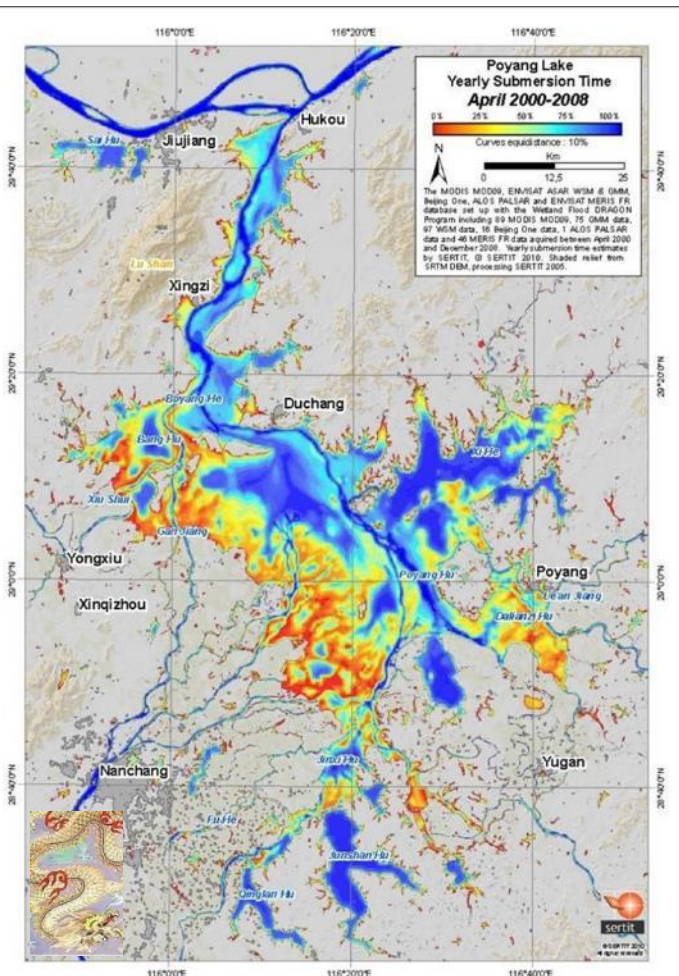

Poyang lake, PR China



15 years of monitoring

Important to monitor water resource as water is a key element for human being and life


Better understanding of water cycle

Why it is important to monitor water bodies?

Monitoring : keys for hydrological modeling

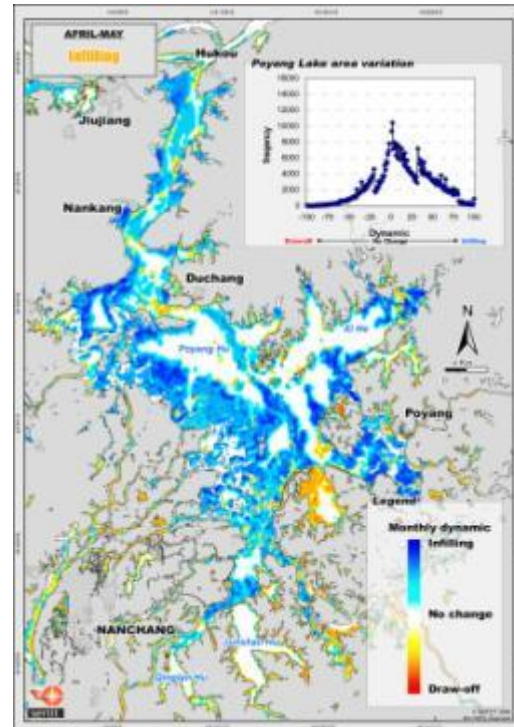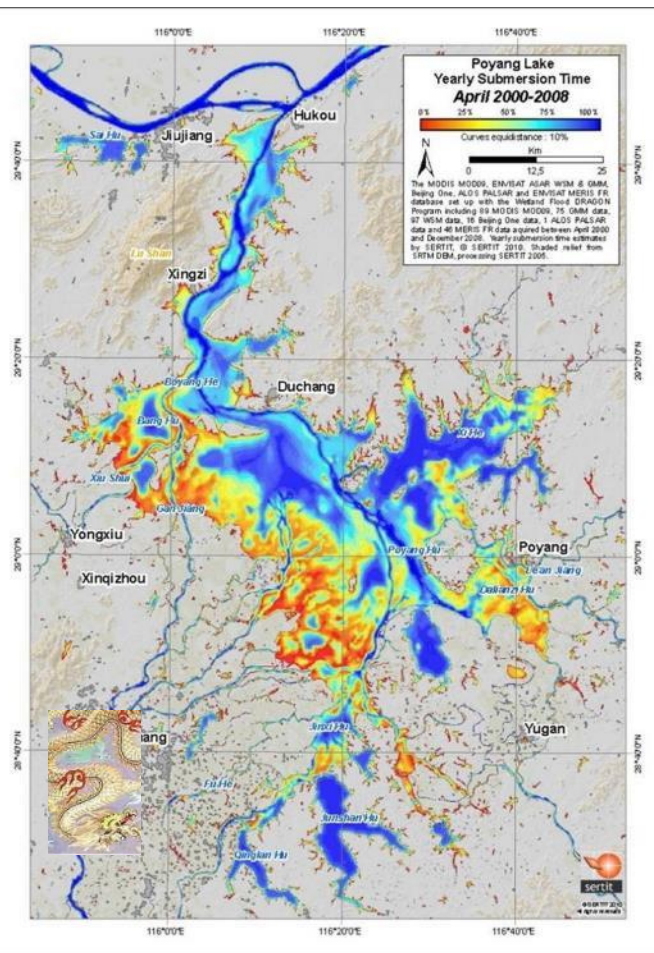

Water mass movement: infilling



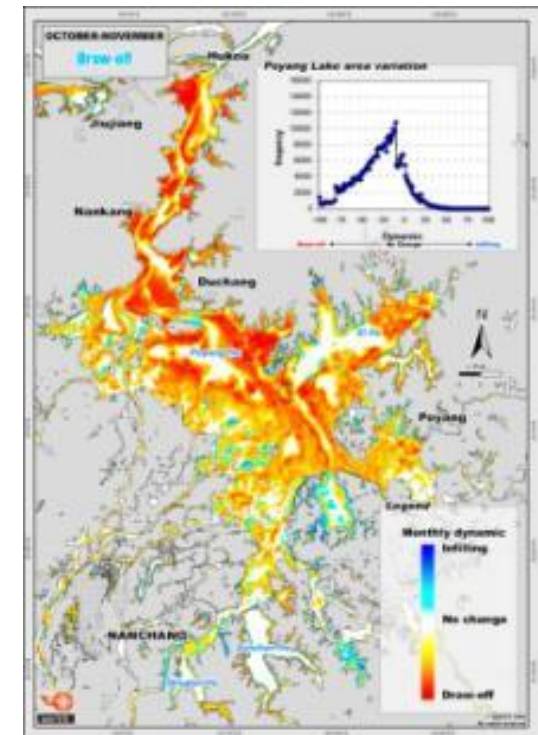


Water mass movement draw off

Why it is important to monitor water bodies?

Monitoring : keys for **long term change : lakes are climate sentinels**

Inputs are long time series of EO data

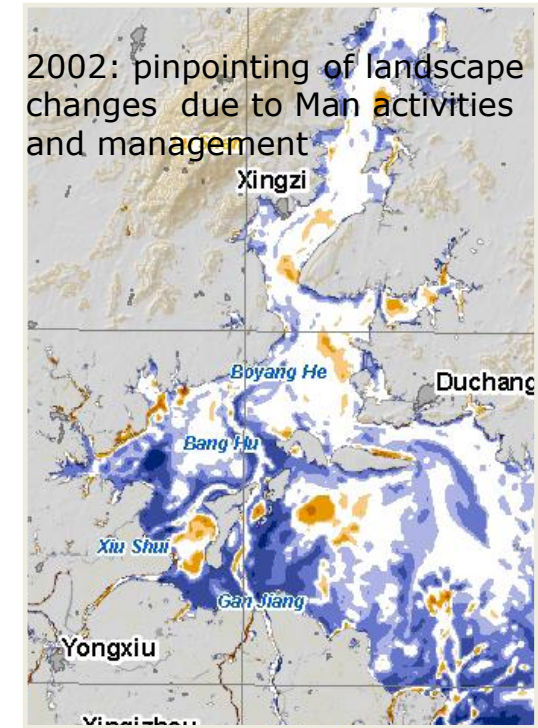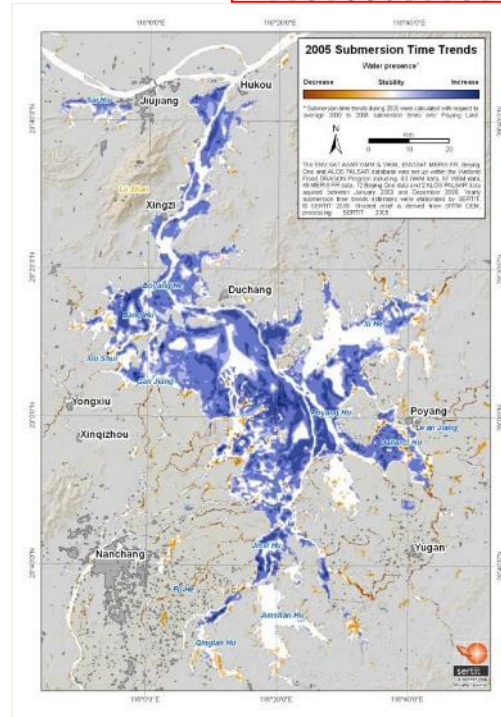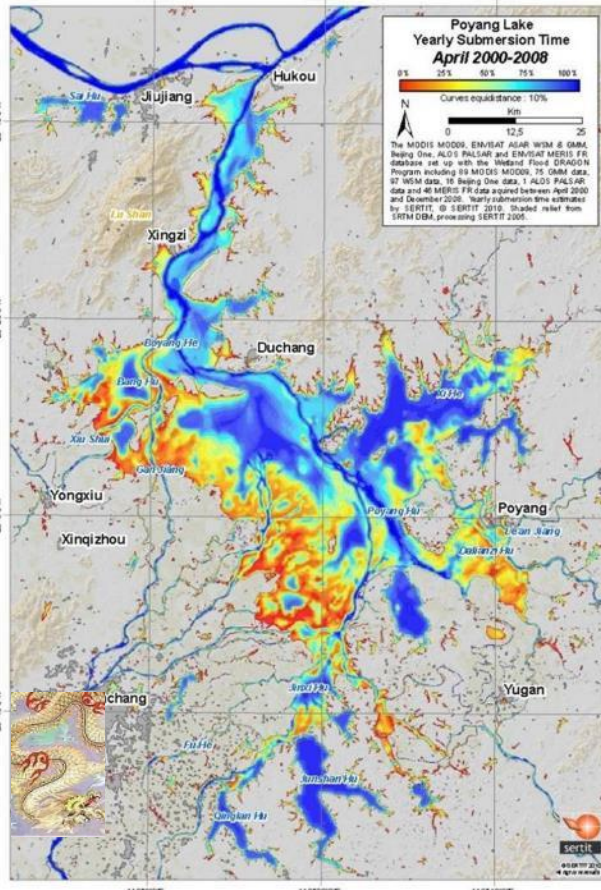


2005 : water stay longer period due to the February flood

2008 : Deficit of water stay in the delta part

Why it is important to monitor water bodies?


Monitoring : keys for epidemiology

Inputs are long time series of EO data

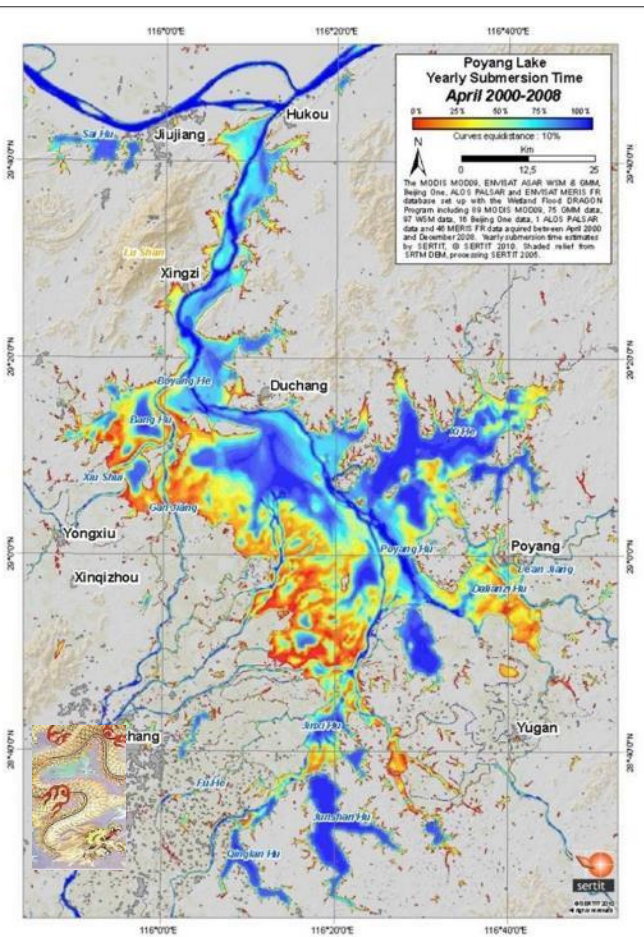

Water = key element in epidemiology ift Malaria, Rift valley fever, Schistosomiasis Etc ...


Dynamic element => need to be monitor

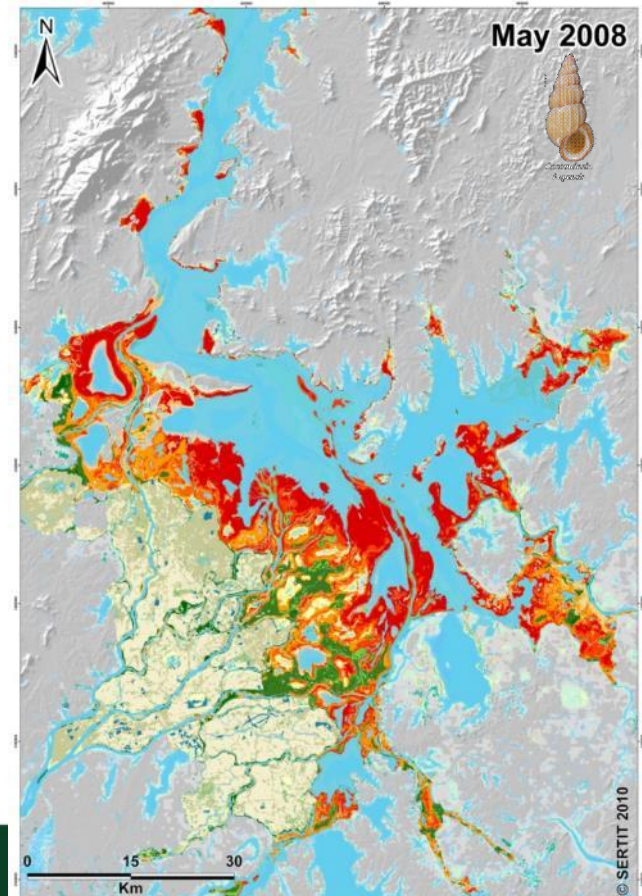

Why it is important to monitor water bodies?

Monitoring : keys for **Biodiversity**


Inputs are long time series of EO data

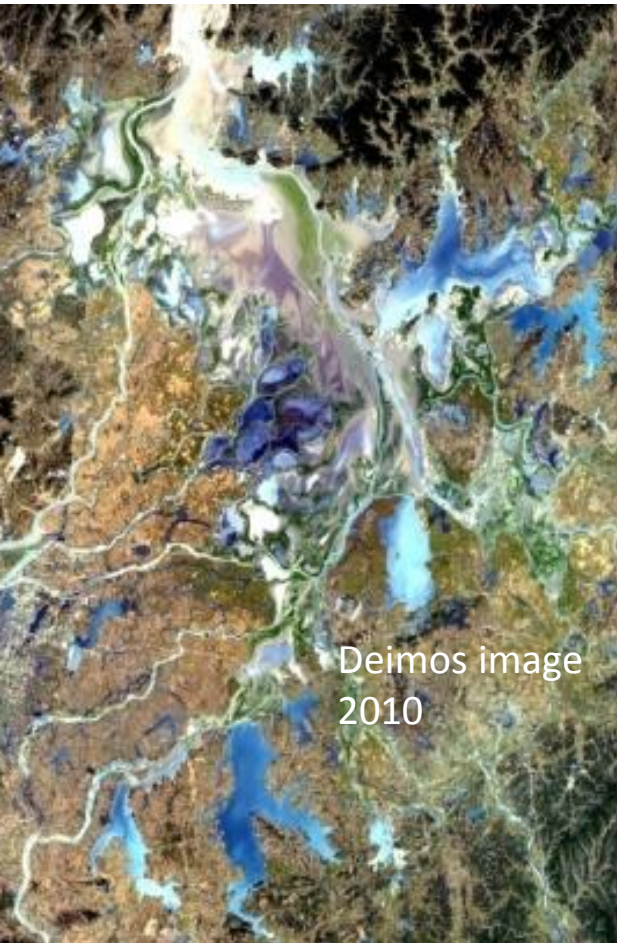

Deimos image 2010

Water = key element driving force of sensible ecosystem
Etc ...

Input for oriented field survey

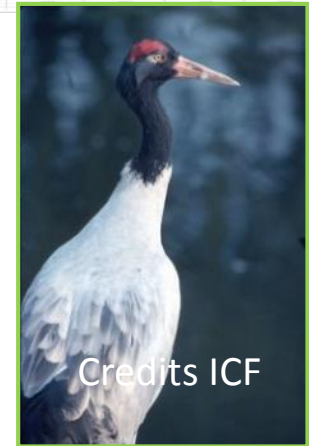

Credits ICF



Credits ICF

Near 30 years of exploitation of EO data for water bodies mapping and monitoring




Improvement from one generation to another one

- SPOT1-3 to SPOT4-5=> SPOT 6-7
- SPOT => Pleiades VHR
- MODIS => MERIS=> S3 OCLI
- Sentinel2

- ERS =>ENVISAT=> Sentinel 1A/B
- HJ 1C => Chang Zheng 4C
- Radarsat 1 => Radarsat 2
- VHR SAR TerraSar X and CSK

Improvement in term of

- Swath
- Resolution
- Radiometric quality
- Revisiting time
- Access to images
- Derived products

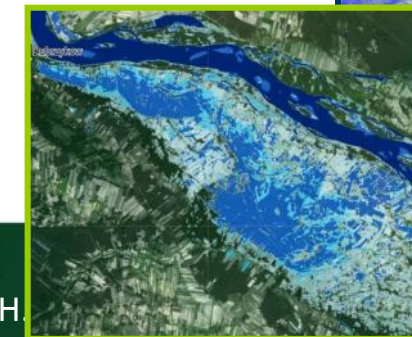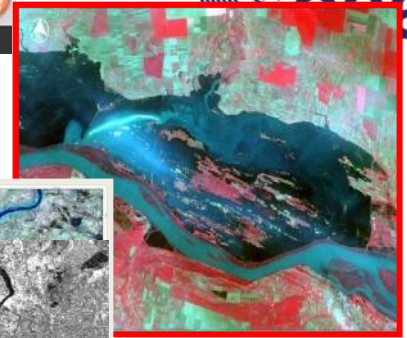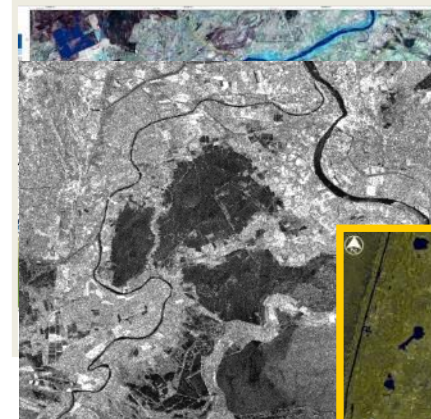

Presentation outline

Introduction: Why water bodies and flood mapping and monitoring

Flood and lakes in the landscape

Short cut of Physical basis for Water bodies mapping

Elements for water bodies extraction based on SAR imagery

SAR sensors for water bodies and/or flood mapping


- Past mission
- On going missions
- Future missions

Flood plain and lakes monitoring


- Short term Monitoring
- Long term monitoring
- Meteo climato parameters

Concluding remarks


Flood patterns recognition

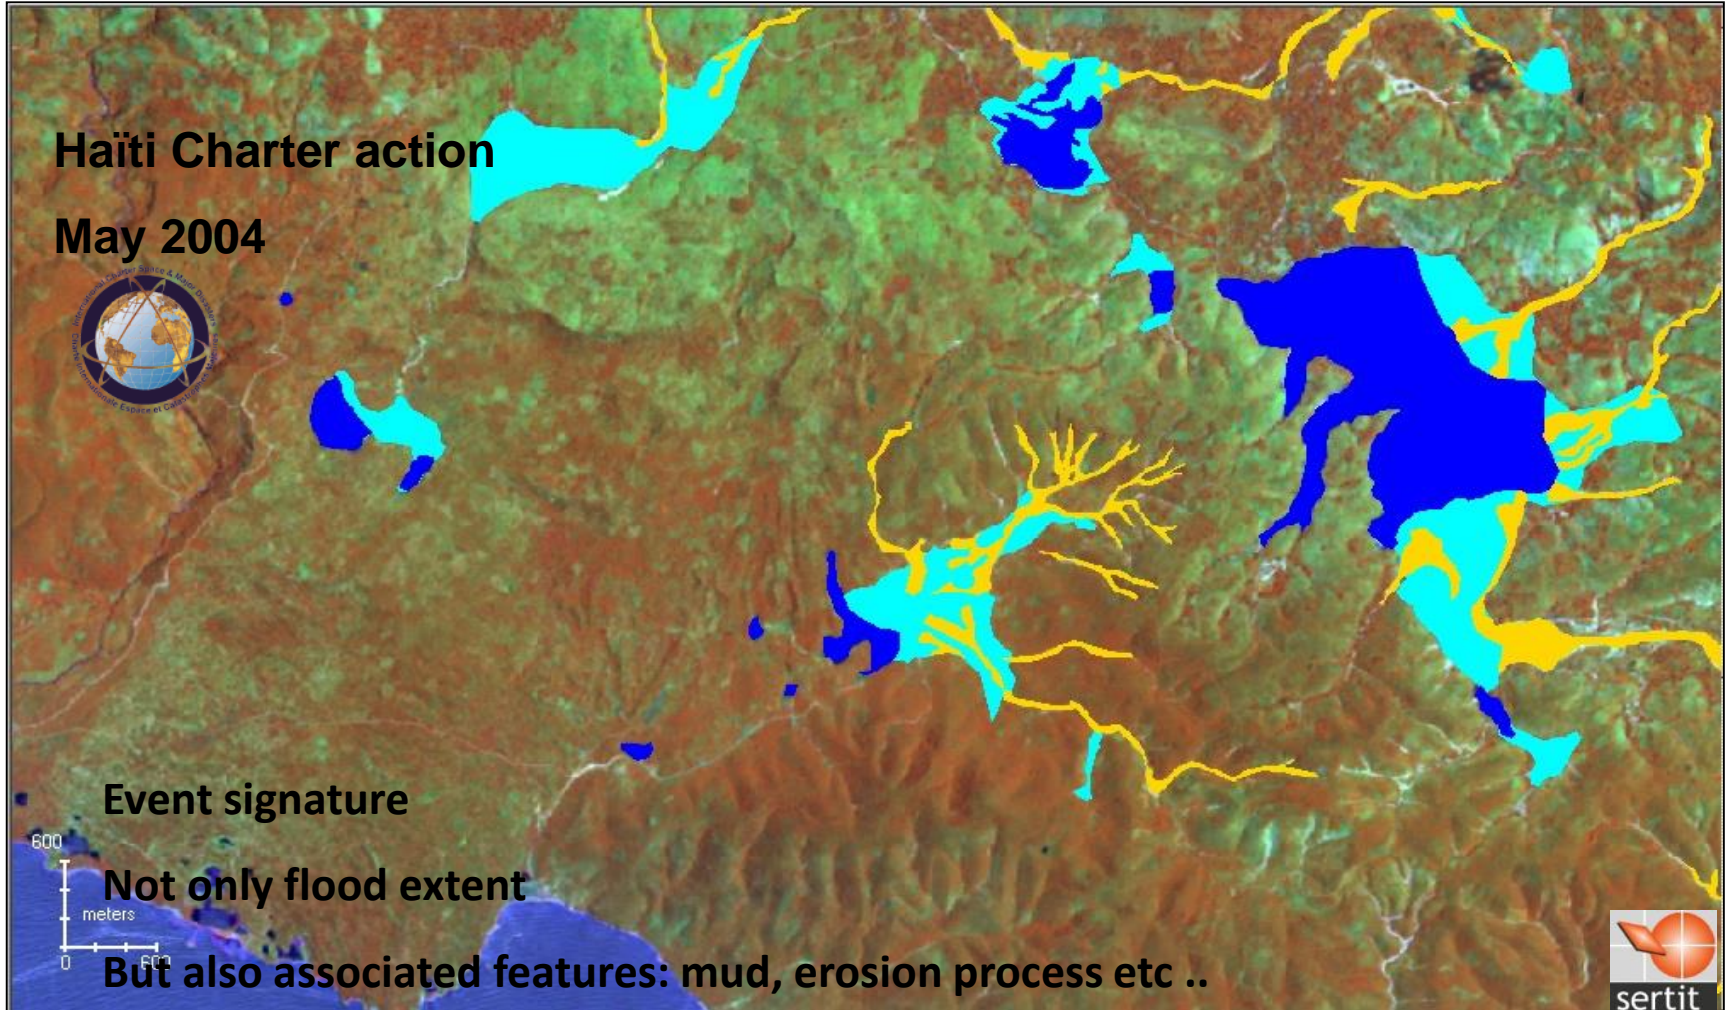

Event signatures

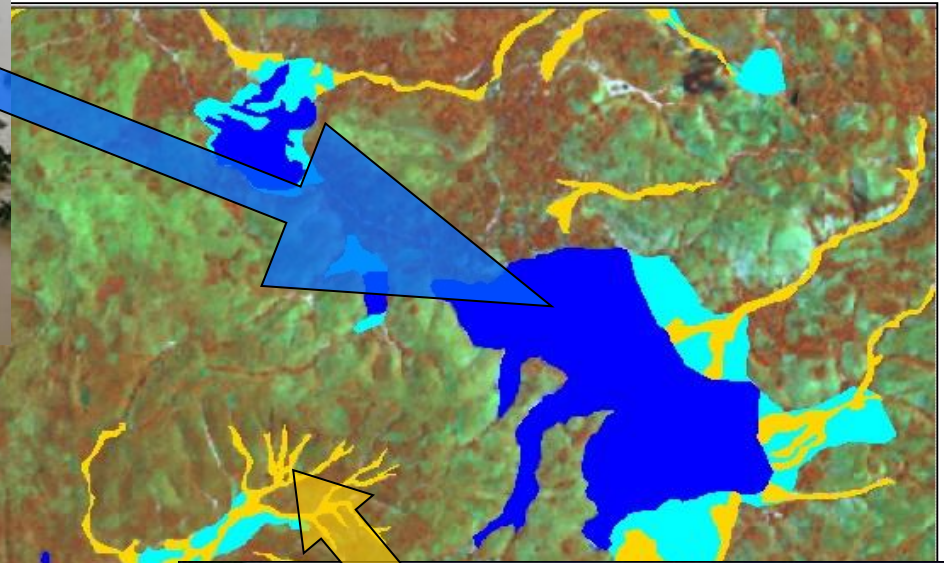

Flood patterns recognition

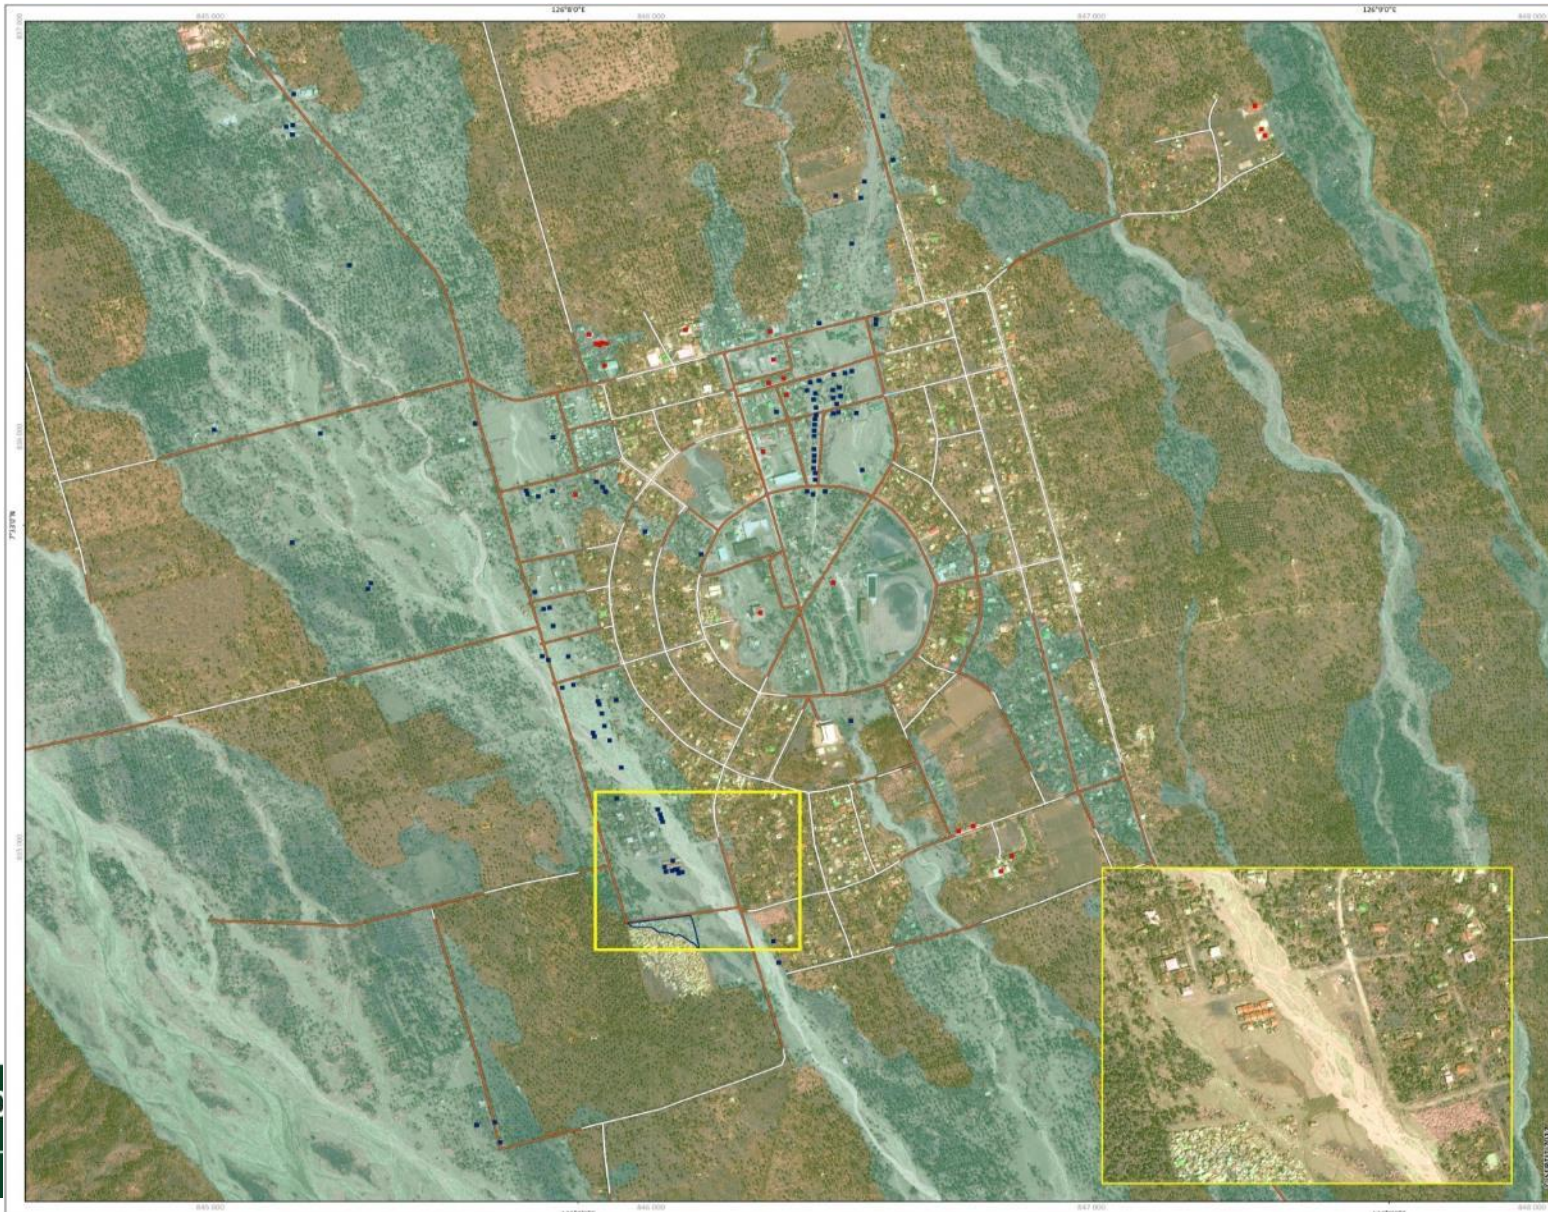

Charter Call ID No: 423-424
TC:2012-000137-FPH
Product No: 03

PHILIPPINES - Mindanao Island New Bataan - Damage assessment Typhoon Bopha/Pablo Observed the 10/12/2012

Location Diagrams

Legend

■ Probable flood	— Road infrastructure (probable)
■ Probable wind	— Flood affected
□ Flooded slum area	— Unaffected
■ Flood traces (water/mud)	■ Tree windfall damage

Other Typhoon damage

Interpretation

Bopha Typhoon which devastated Mindanao's island, in southern Philippines, on Wednesday 05 December 2012. The authorities count around 700 dead, 400 missing and 250,000 homeless after its passage. The typhoon has badly hit the New Bataan area: many buildings are flooded and wind damaged, with a slum area being swept away, a number of roads also seem seriously affected and the trees in the area have been hit. This is evidenced after analysing Pléiades imagery acquired the 10 December 2012 (0.50m).

Cartographic Information

0 100 200 m

Local projection: UTM 51 North, Datum: WGS 84
Geographic projection: Lat/Lon (DMS), Datum: WGS 84
Scale: 1:5 000 for A1 prints
Geometric references:
Horizontal: Pléiades navigation parameters
Vertical: SRTM, maximum 10m specification

Data Sources

Disaster impact assessment (potentially affected buildings, roads, flood traces extent), ©SERTIT 2012
Pléiades 1A, image (0.50m) acquired 10 December 2012, © CNES 2012, distribution Atrium Services / Spot Image SA, all rights reserved



Framework

The products elaborated for this Rapid Mapping Activity are realized to the best of our ability, within a very short time frame, during a crisis/exercise, optimising the material available.
All geographic information has limitations due to the scale, resolution, date and interpretation of the original source materials. No liability concerning the content or the use thereof is assumed by the producer.

Map produced the 11 December 2012 by SERTIT
© SERTIT 2012

sertit@sertit.us-straabg.fr
<http://sertit.us-straabg.fr>

Flood patterns recognition

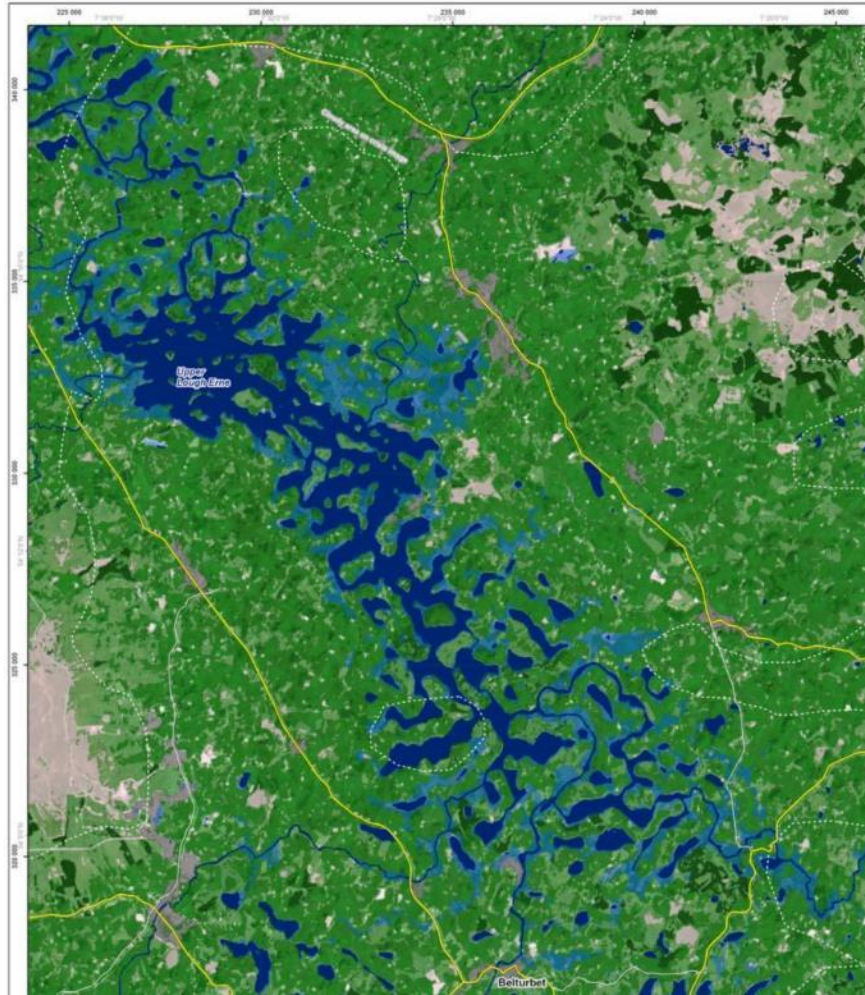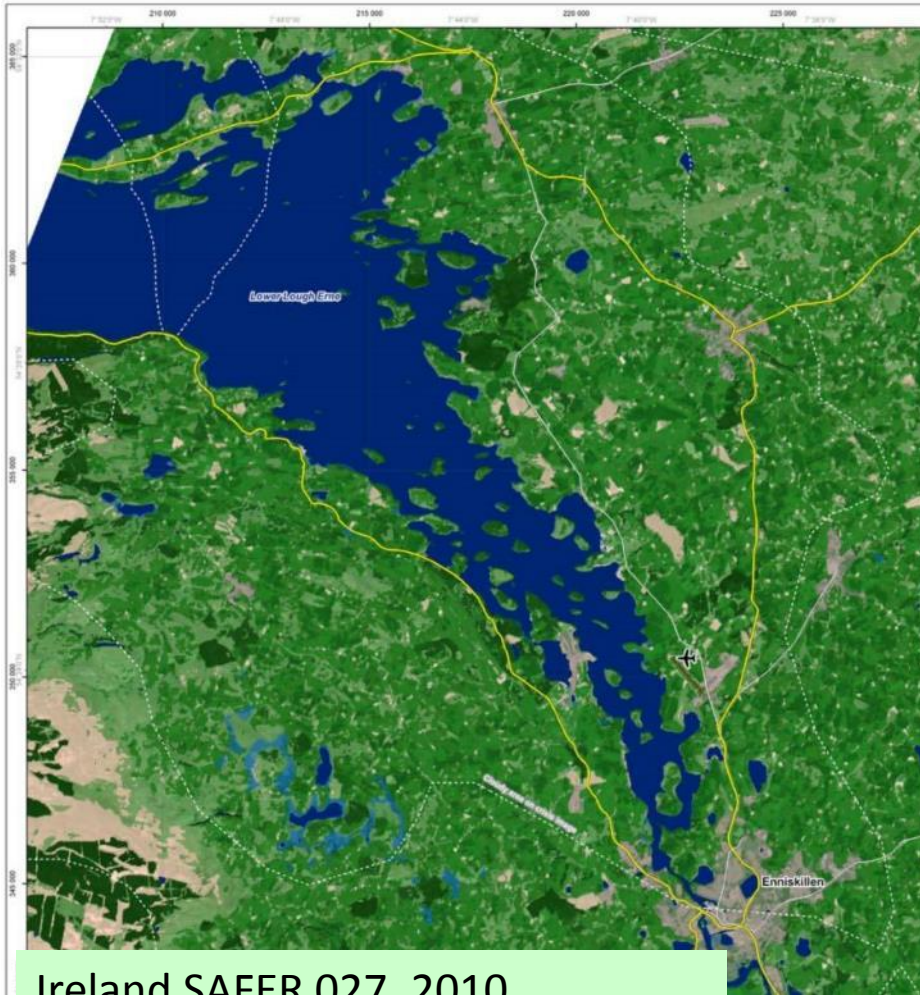


Ireland SAFER 027, 2010

Water within bogs

ADVA
20-25

Flood patterns recognition

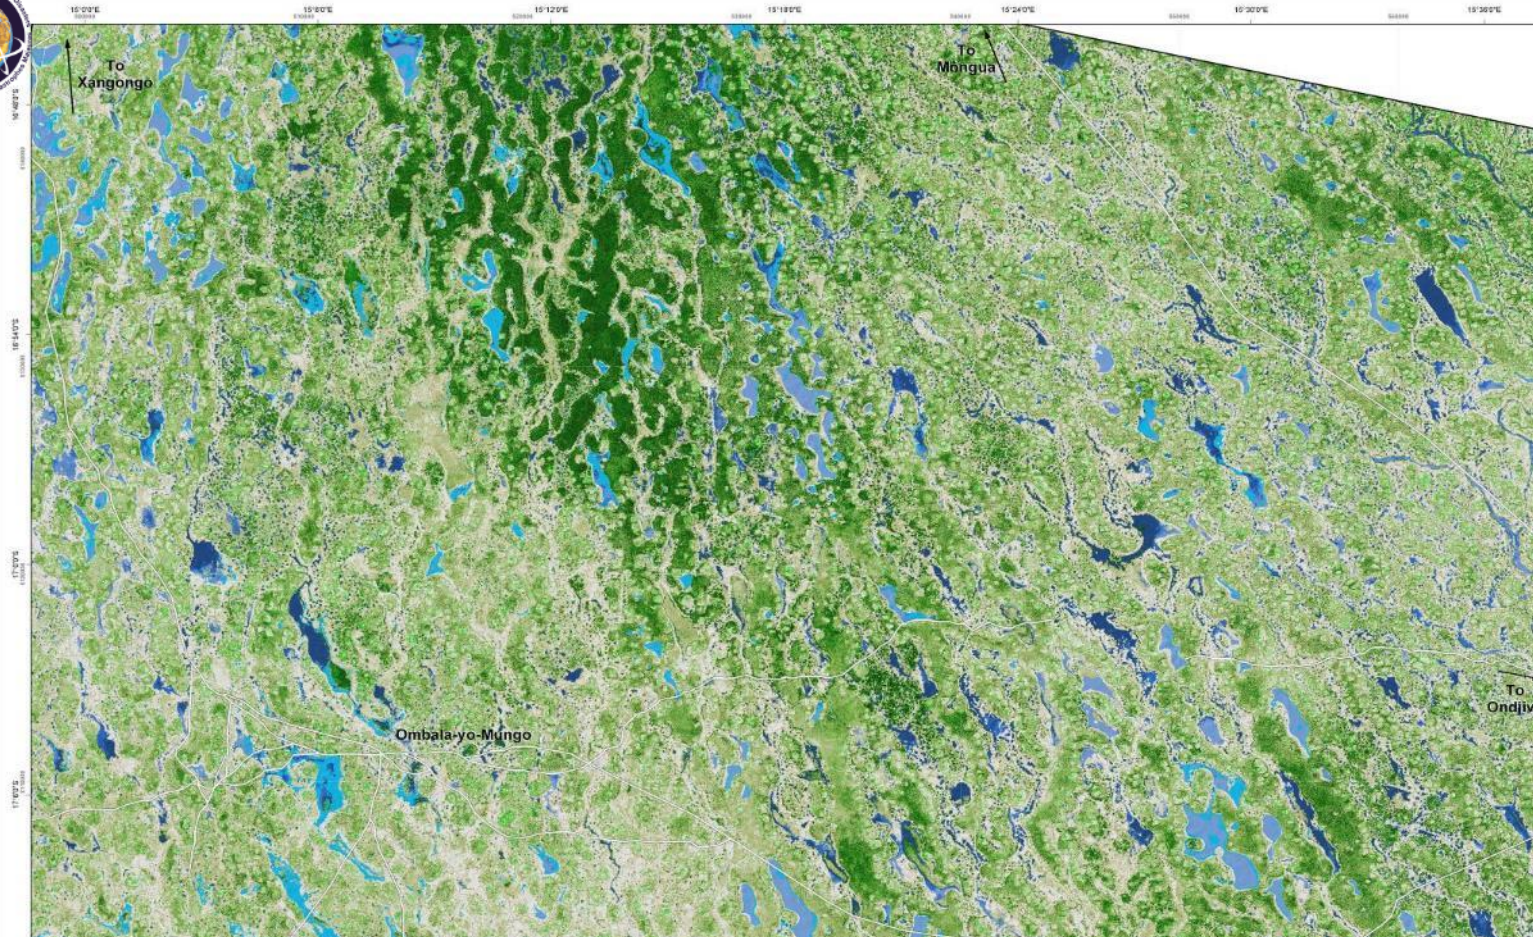

Charter Call 253 - SERTIT Product No 04

ANGOLA Cunene province Ombala-yo-Mungo area Impact map

Scale: 1:100,000

Location Diagrams

Legend

- Water bodies detected solely on the 13th of May 2009
- Reference water bodies
- Trees and dunes
- Moisture areas
- Roads
- Contours

Interpretation

This impact product represents the situation on the ground in the flood hit Cunene area the 13th of May 2009. The area will be in a state 2009 for many years, which have caused floods in Angola's southern and central provinces of Namibe, Cunene, Cuando Cubango, Nam-Lunda Sul, Uige and Bié.

Projection & Grid Information

Reference Grid		Geographic Grid	
Projection:	UTM Zone 33 South	Geographic:	EDMS
Longitude:	WGS 84	Width:	WGS 84
Latitude:	WGS 84	Height:	WGS 84

Satellite Information

SPOT 4		SPOT 6	
Orbit:	5 km	Orbit:	5 km
Acquisition Date:	13th May 2009	Acquisition Date:	29th March 2007
Georeferencing Accuracy:	± 4 metres RMSE	Georeferencing Accuracy:	± 4 metres RMSE

Credits & Copyright

© Data layer:
Water bodies detected solely on the 13th of May 2009 © SERTIT 2009

Reference layers:
Leaf cover, roads, contours © SERTIT 2009

Date: 13th of May 2009
Edition: 1.0
Print Dimensions @ 1:100,000: 800 A1 size (843 x 600mm)

RESPOND
SERTIT Technical Supporting
United Nations Relief, Disaster
Prevention & Mitigation

User coordination: UNOSAT
Data provider: SERTIT

Angola Charter action
Water within inter dune depression
May 2009

Lakes and water bodies: Landscape variability that will be captured by EO Sensors



Lakes and water bodies: Landscape variability



Lakes and water bodies: Landscape variability



Presentation outline

Introduction: Why water bodies and flood mapping and monitoring

Flood and lakes in the landscape

Short cut of Physical basis for Water bodies mapping

Elements for water bodies extraction based on SAR imagery

SAR sensors for water bodies and/or flood mapping

- **Past mission**
- **On going missions**
- **Future missions**


Flood plain and lakes monitoring

- **Short term Monitoring**
- **Long term monitoring**
- **Meteo climato parameters**

Concluding remarks


29 August 2016

Clear sky
Sunny weather
⇒ **Sentinel 2**
⇒ **Pléiades HR**

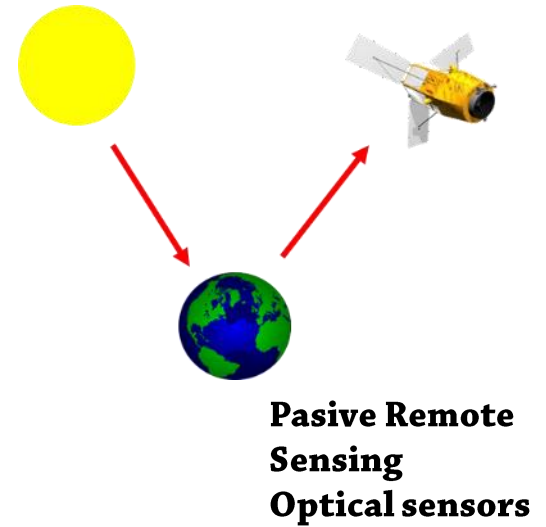

29 August 2016

25 August 2016

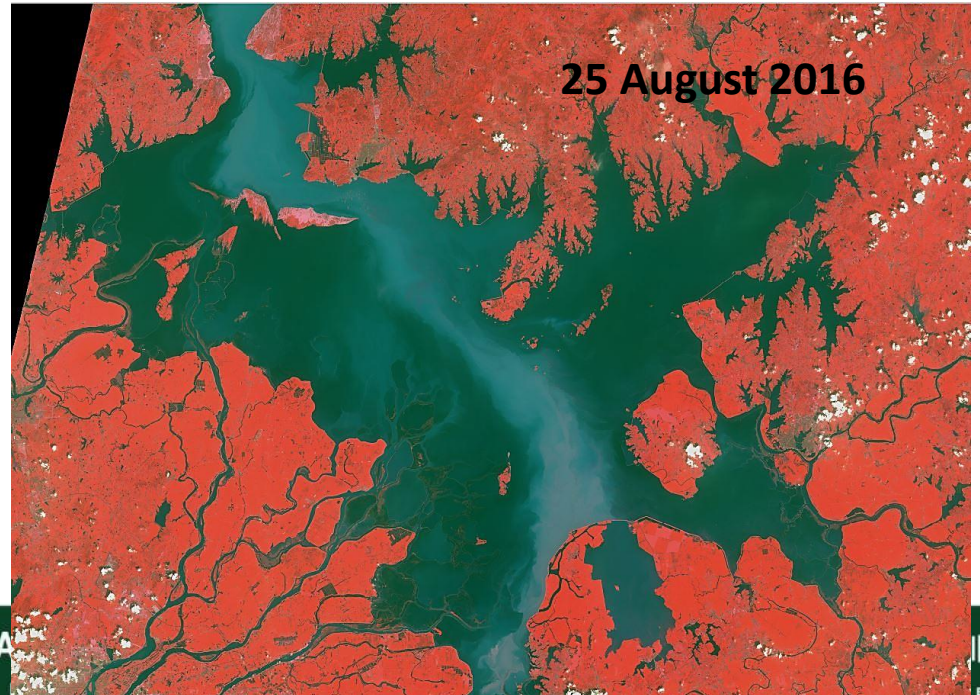




26 August 2016

Cloudy , rainy weather
Sunny weather


- ⇒ **Sentinel 1**
- ⇒ **Radarsat**
- ⇒ **TSX & CSK**
- ⇒ **Gaofeng 3**



26 August 2016

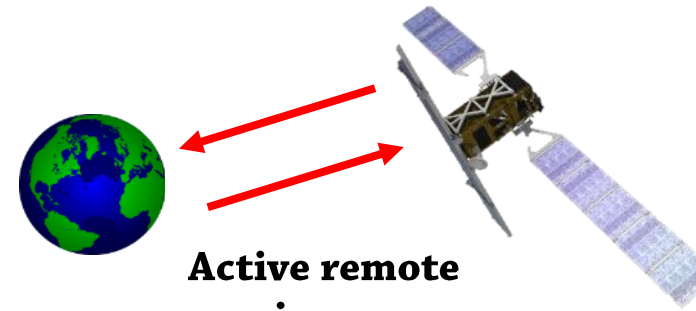


Active remote sensing
SAR sensors

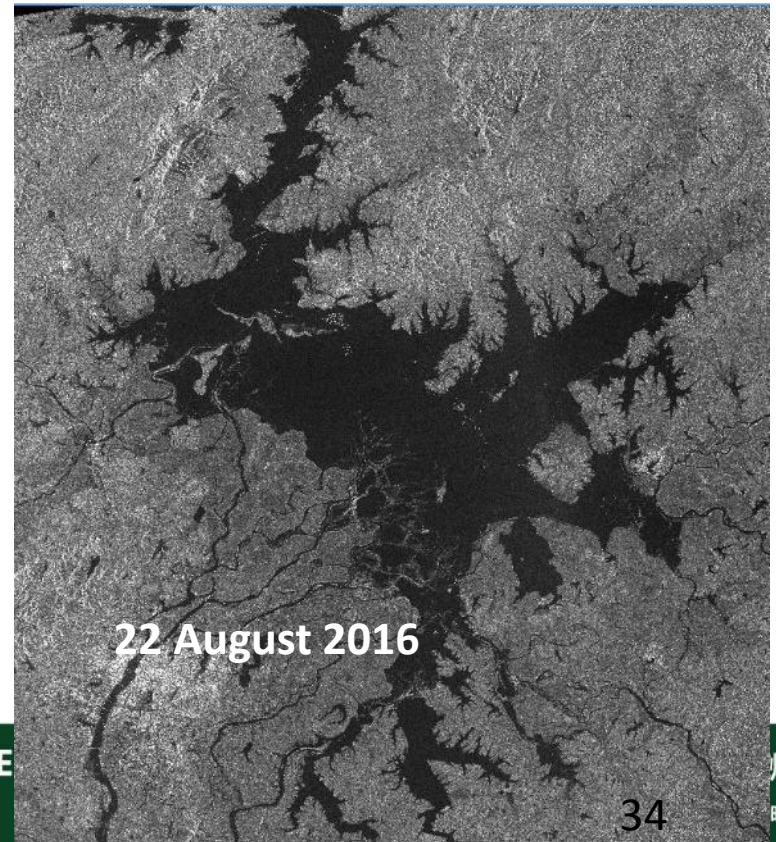

22 August 2016

Wavelengths pertinent for water surface mapping/monitoring

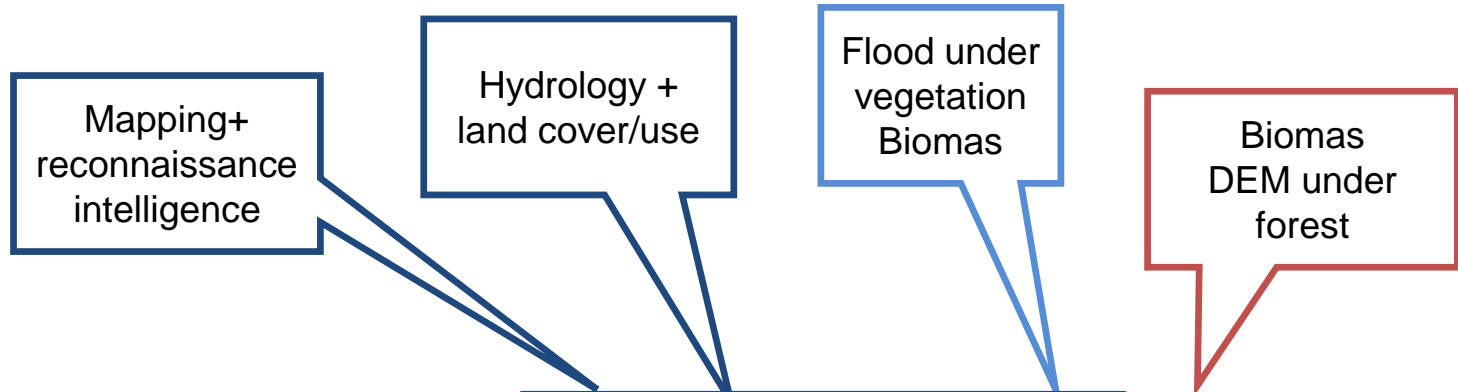

Bandes	Ka	K	Ku	X	C	S	L	P
Fréquence (GHz)	40-26.5	26.5-18	18-12.5	12.5-8	8-4	4-2	2-1	1-0.3
Longueur d'onde (cm)	0.75-1.1	1.1-1.67	1.67-2.4	2.4-3.75	3.75-7.5	7.5-15	15-30	30-100
Polarisation	HH, VV, HV, VH							

Images acquired in X, C, S, L Bands are potentially suitable for water bodies mapping



Credit: MODIS © NASA/GSFC 2009

Poland Floods May - June 2010

Category	Satellite	Sensor/Beam	Acquisition (UTC)	Res. (m)
VHR2	COSMO-SkyMed	Himage	26/05/2010 00:00:00	1 - 4
HR1	RADARSAT-2	Ultra-Fine	22/05/2010 05:02:47	4 - 10
HR1	RADARSAT-2	Fine	12/06/2010 04:49	
HR1	RADARSAT-2	Fine	12/06/2010 04:50	
HR1	RADARSAT-2	Fine	15/06/2010 16:25	
HR1	RADARSAT-2	Fine	16/06/2010 04:33	
HR1	RADARSAT-2	Fine	18/06/2010 16:38	
HR1	RADARSAT-2	Fine	25/06/2010 16:34	
HR1	RADARSAT-2	Fine	25/06/2010 16:34	
HR1	RADARSAT-2	ML Fine	25/05/2010 16:38:27	
HR1	RADARSAT-2	Fine	26/06/2010 04:41	
HR1	TerraSAR-X	ScanSAR	26/05/2010 16:43:18	
HR1	TerraSAR-X	ScanSAR	27/05/2010 16:26:01	
HR1	TerraSAR-X	Stripmap	13/06/2010 16:17	
HR1	COSMO-SkyMed	Himage	09/06/2010 00:00	
HR1	COSMO-SkyMed	Himage	10/06/2010 00:00	
HR1	COSMO-SkyMed	Himage	11/06/2010 00:00	
HR1	ENVISAT ASAR	IM	20/06/2010 00:00	
HR2	RADARSAT-2	Fine	22/05/2010 16:25:34	10 - 30
HR2	RADARSAT-2	Fine	23/05/2010 04:33:25	
HR2	RADARSAT-2	Multi-Look	25/05/2010 05:15:23	
HR2	RADARSAT-2	ML Fine	25/05/2010 16:38:04	
HR2	RADARSAT-2	ML Fine	26/05/2010 04:46:04	
HR2	ERS-2	SAR Standard	19/05/2010 20:39:00	
HR2	ENVISAT ASAR	IM	16/06/2010 00:00	
HR2	ENVISAT ASAR	IM	20/06/2010 00:00	
HR2	ALOS PALSAR		21/05/2010 21:27:20	
MR	ENVISAT	WSM	25/05/2010 20:22:18	> 30
Total Radar crisis data : 28				
HR1	SPOT5	Multispectral 10m	21/05/2010 09:40:00	
HR1	Formosat-2	Panchromatic	23/05/2010 08:34:00	
HR2	SPOT5	Multispectral 10m	21/05/2010 09:40:00	
HR2	SPOT5	Multispectral 10m	21/05/2010 09:40:00	
HR2	ALOS AVNIR-2		21/05/2010 10:18:06	
Total Optical crisis data : 5				



May - June 2010 Poland Floods

- Location: South of Poland - Vistula, Odra and Warta rivers regions
- Due to heavy rains, the level of main rivers increased quickly: daily rainfall was equal to the average cumulative rainfall for two months
- Two flood waves hit the interested regions (higher than the century-oldwater level)
- All National Reserve of the rescue forces of the State Fire Service were mobilized
- Damages in infrastructure, properties, casualties, and long term process for revitalisation



2010 Poland Floods : Rapid Mapping Areas and EO data

2010 Poland Floods : Rapid Mapping Activity Summary

FLOODS in POLAND Vistula, Odra and Warta Rivers

- SAFER GERS38, GERS41**
 Date of Activation: 19/05/2010
 (Poland National HQ of the State Fire Service)
 Date of Closure: 02/07/2010
- Multi Satellite Data used by SERTIT:**
 - ERS-2
 - ENVISAT ASAR
 - RADARSAT-2
 - Terra SAR-x
 - COSMO-SkyMed
 - ALOS PALSAR

 - SPOT 5
 - Formosat-2
 - ALOS AVNIR-2
 - LANDSAT 5
- 30 products provided by SERTIT :**
 - Reference up-to-date maps
 - Flood extent maps
 - Flood dynamics maps
 - Flood impact maps



Presentation outline

Introduction: Why water bodies and flood mapping and monitoring

Flood and lakes in the landscape

Short cut of Physical basis for Water bodies mapping

Elements for water bodies extraction based on SAR imagery

SAR sensors for water bodies and/or flood mapping

- Past mission
- On going missions
- Future missions

Flood plain and lakes monitoring

- Short term Monitoring
- Long term monitoring
- Meteo climato parameters

Concluding remarks

Why SAR is a performing tool for water bodies and flood mapping ?

Near all weather capability

Day & night capabilities


Relative large swath

Relative good revisit

On SAR data water surfaces have low values of BS

But local weather (wind/rain) effect altering the signal

— f=1.3 GHz (L band)
 — f=5.3 GHz (C band)
 - - - f=9.6 GHz (X band)

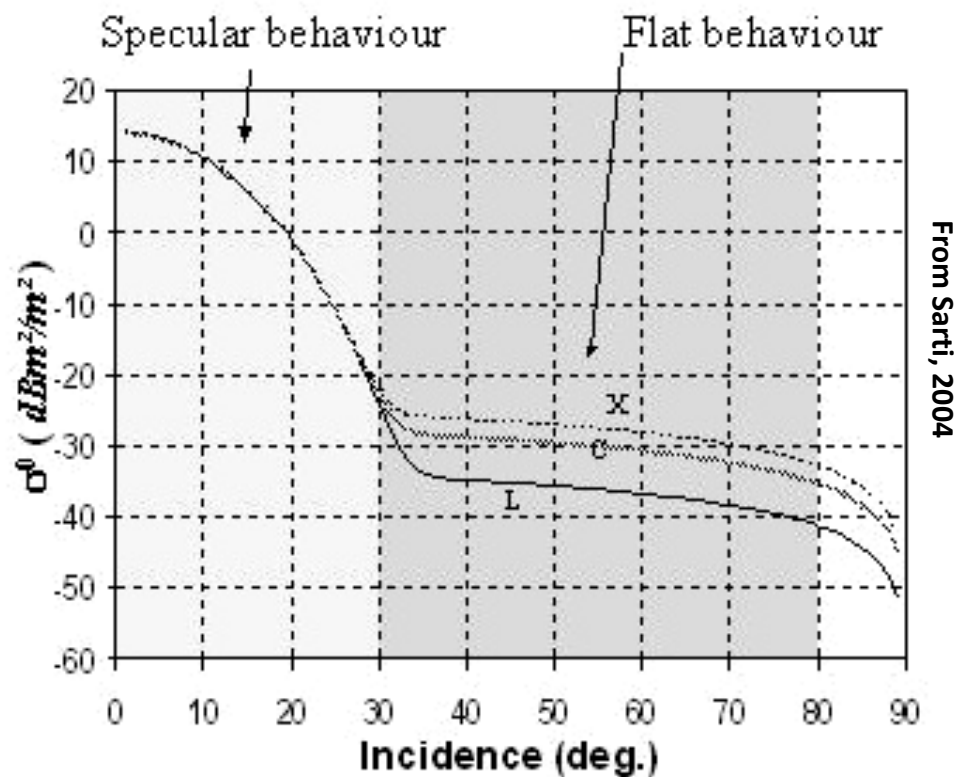


From Sarti, 2004

semi-empirical function of backscatter coefficient σ^0 as a function of incidence (for a mean sea), for 3 different radar bands


Water backscattering in function of incidence angle

20° Increasing incidence 27°

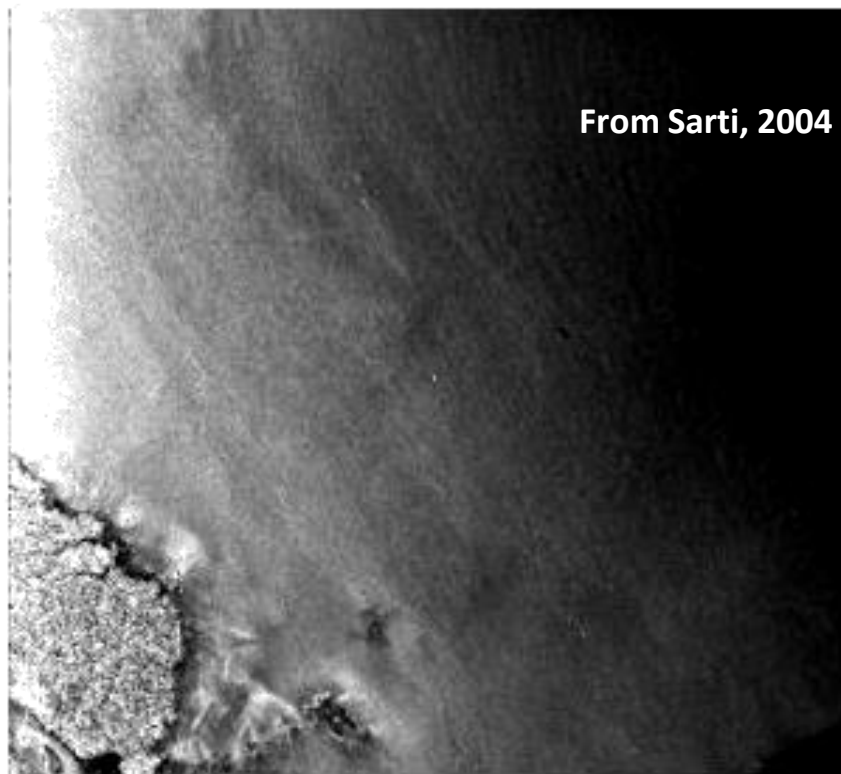


Incidence effect observed on a RADARSAT S1 (20°-27°)

41° ← 26°

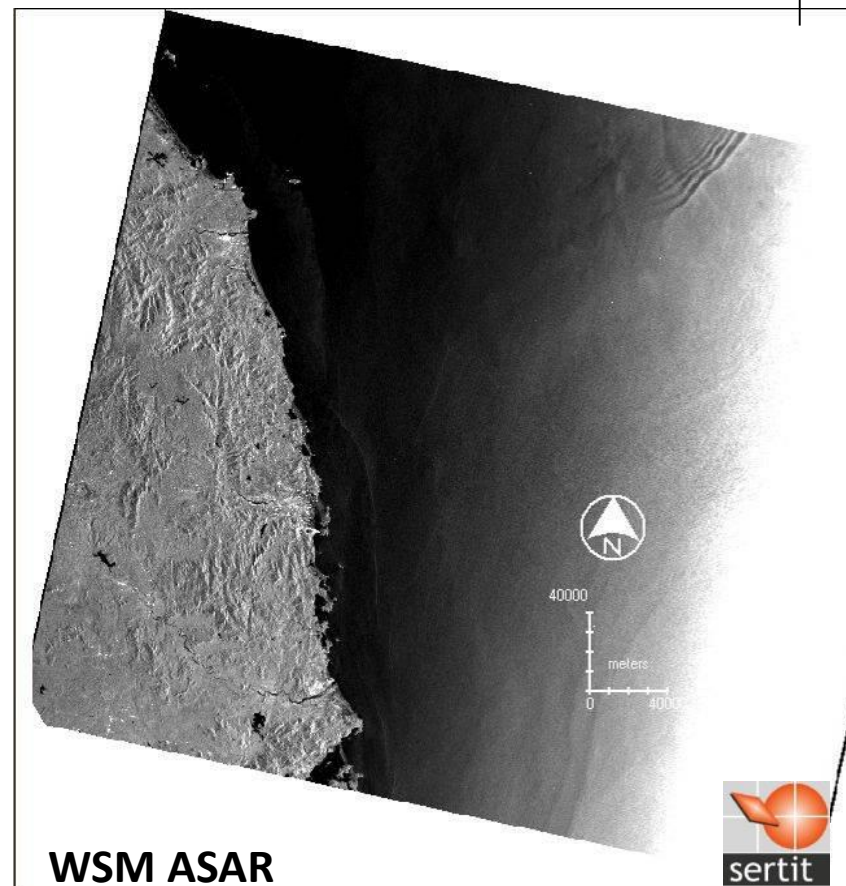


WSM ASAR


Water backscattering in function of incidence angle

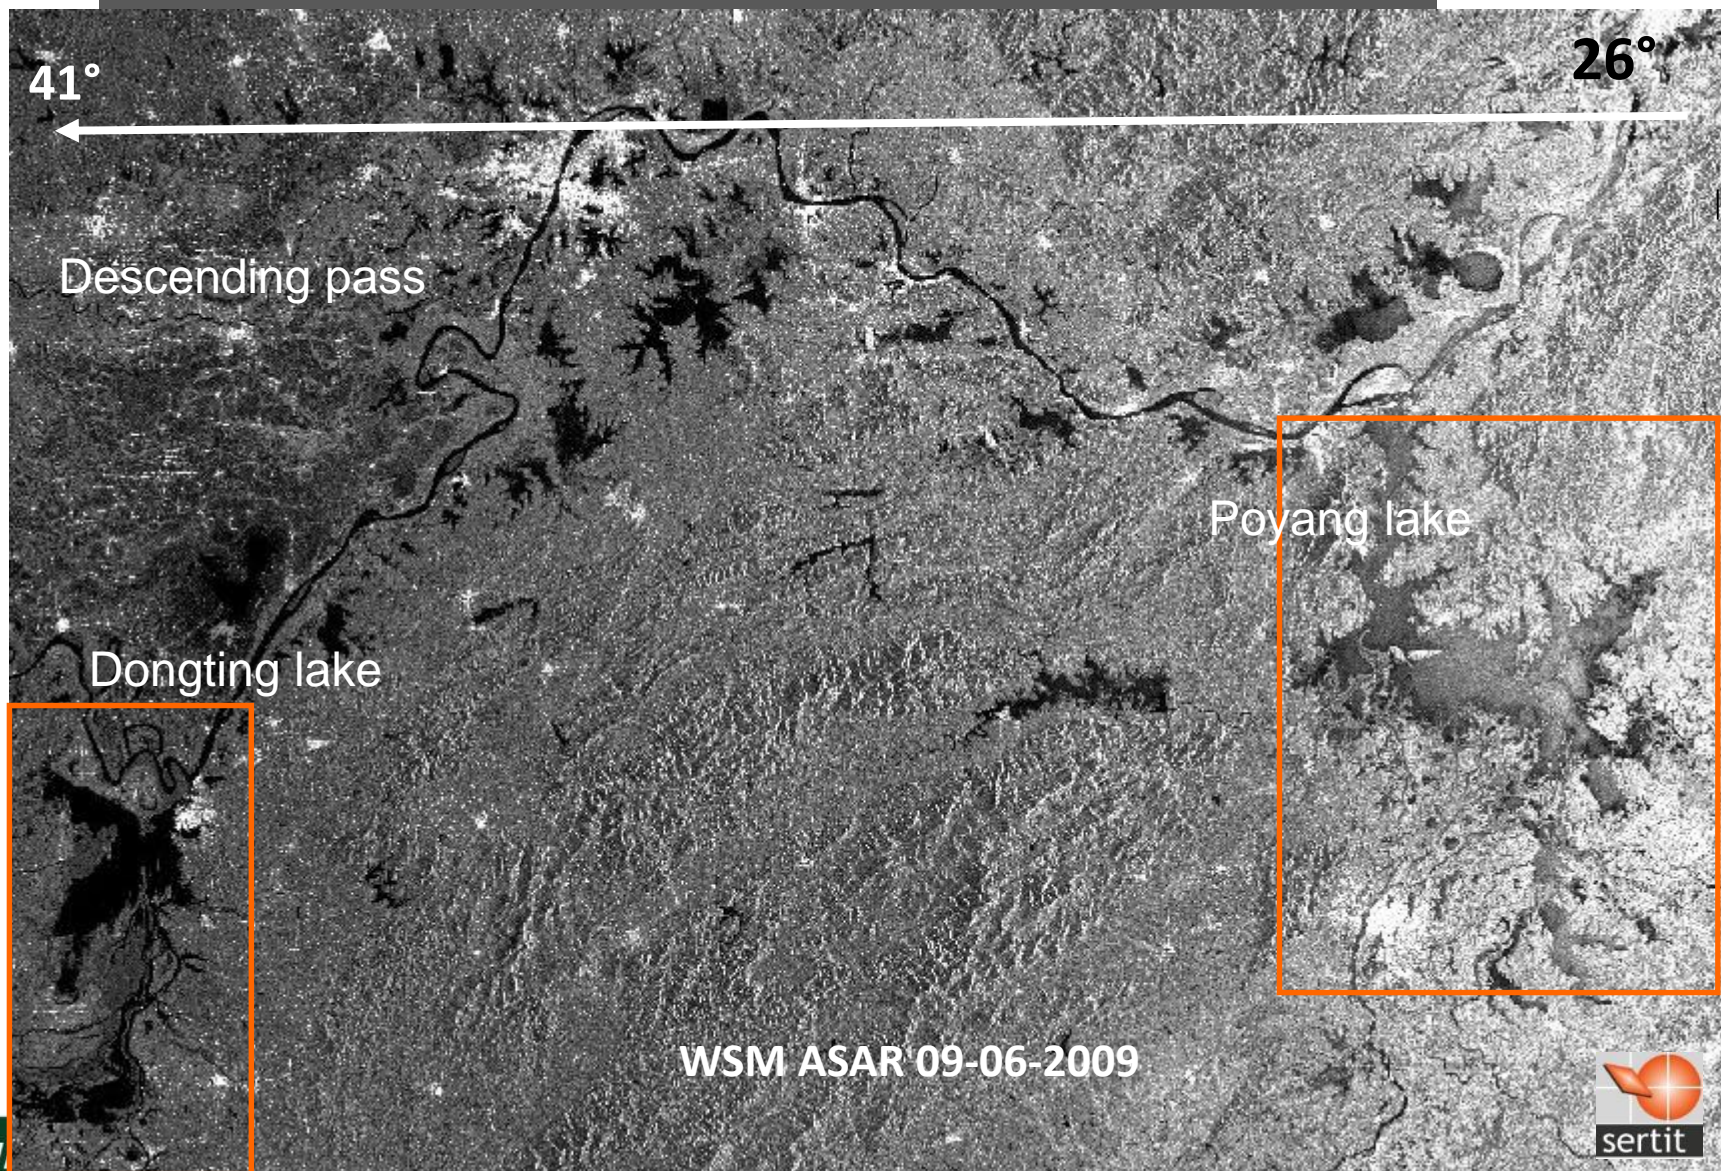




Water backscattering in function of incidence angle


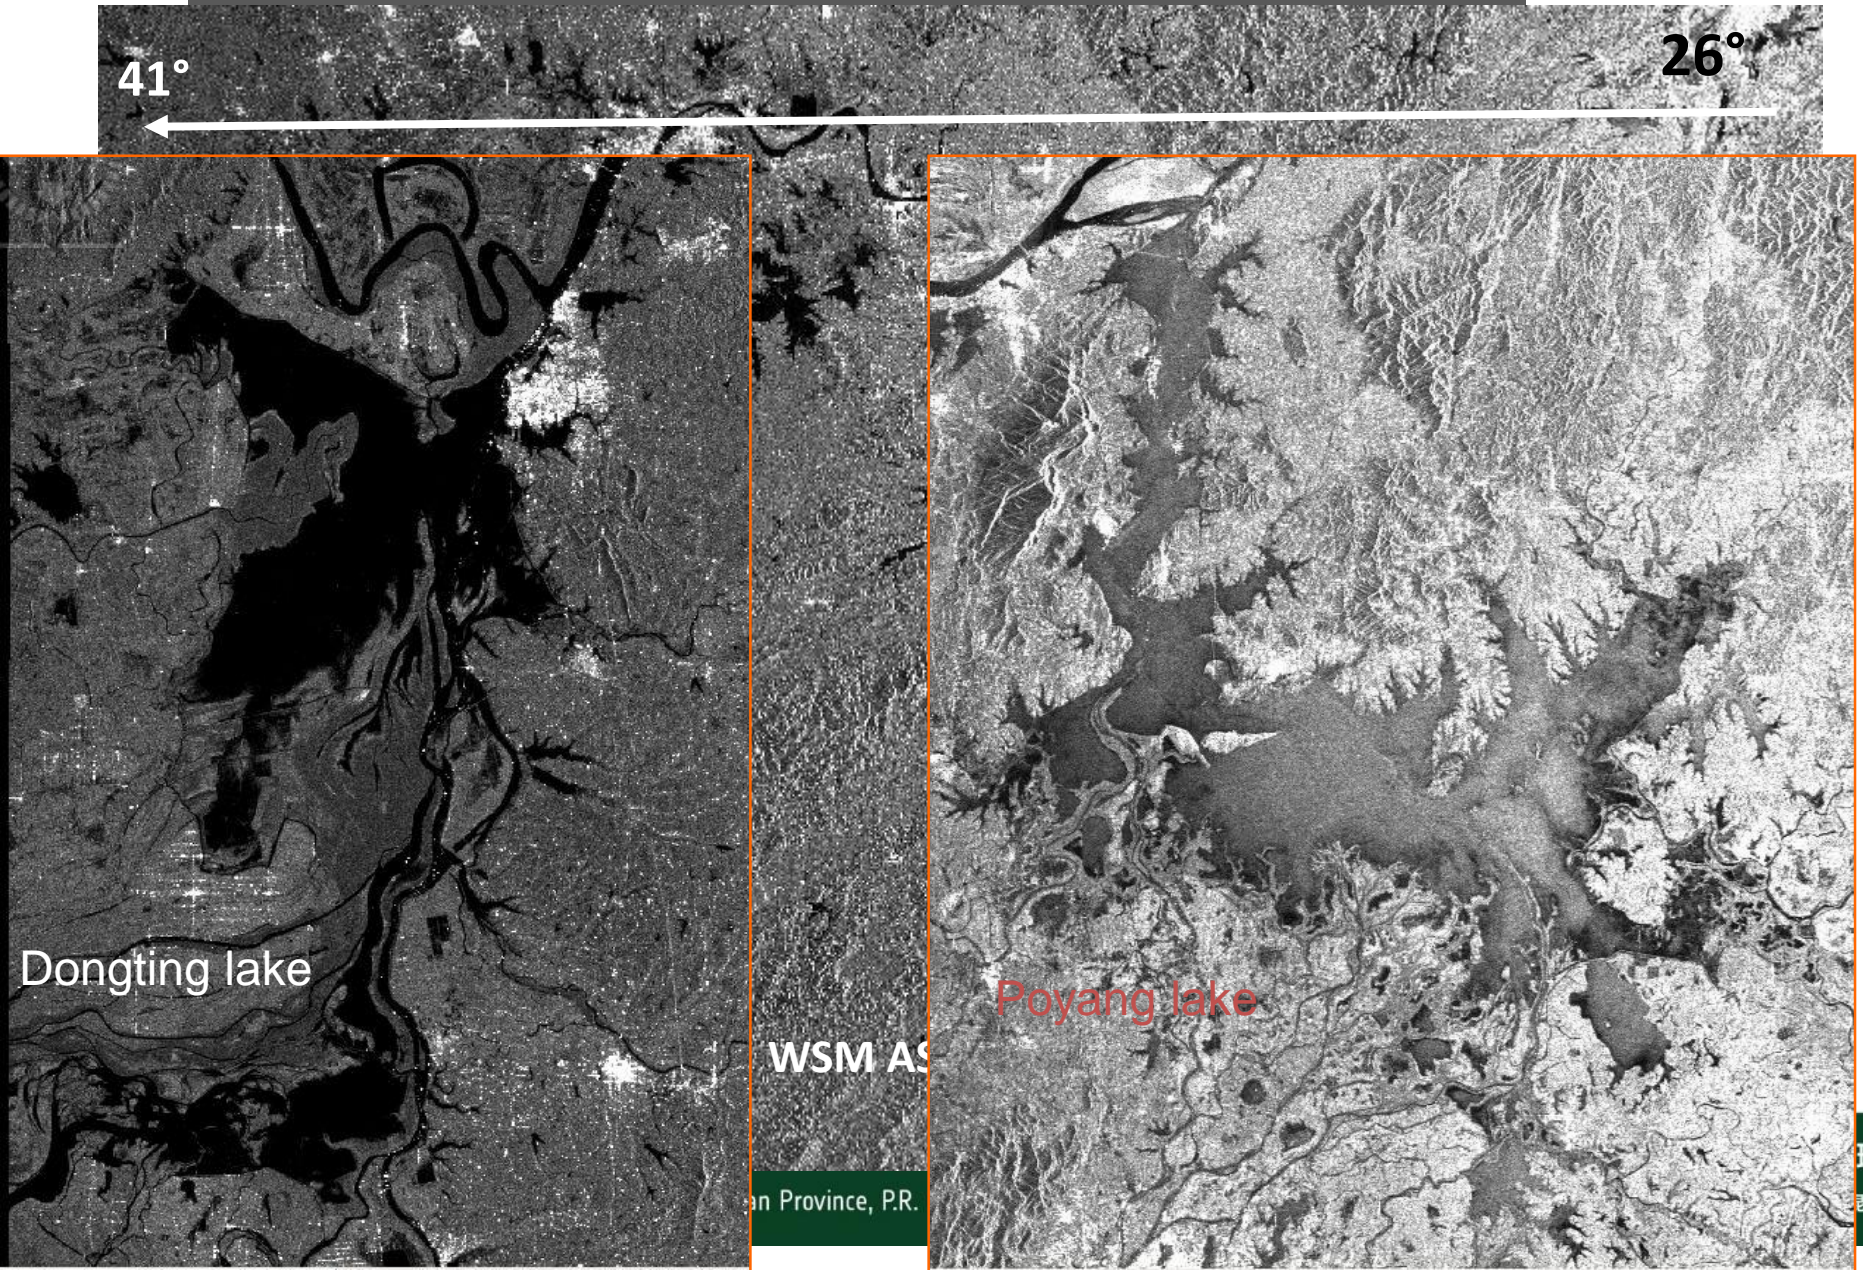


Water backscattering in function of incidence angle

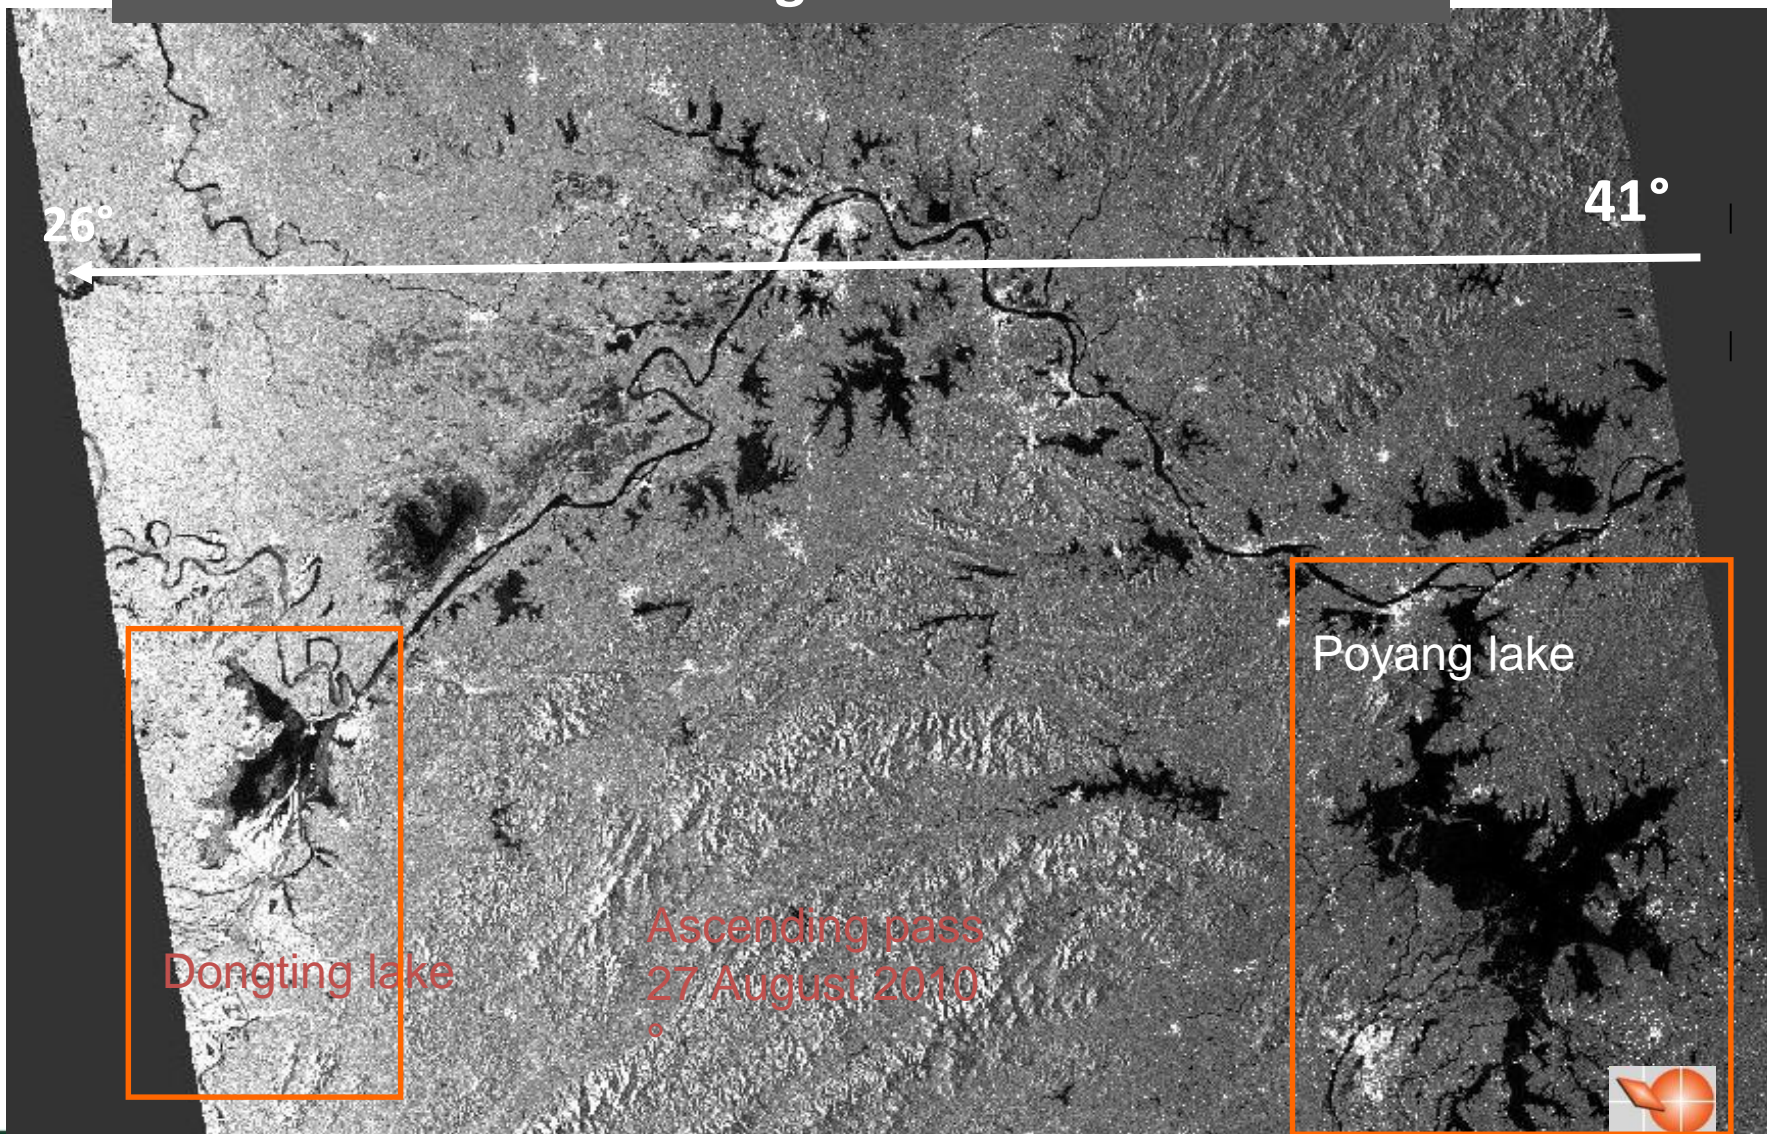

Water backscattering in function of incidence angle

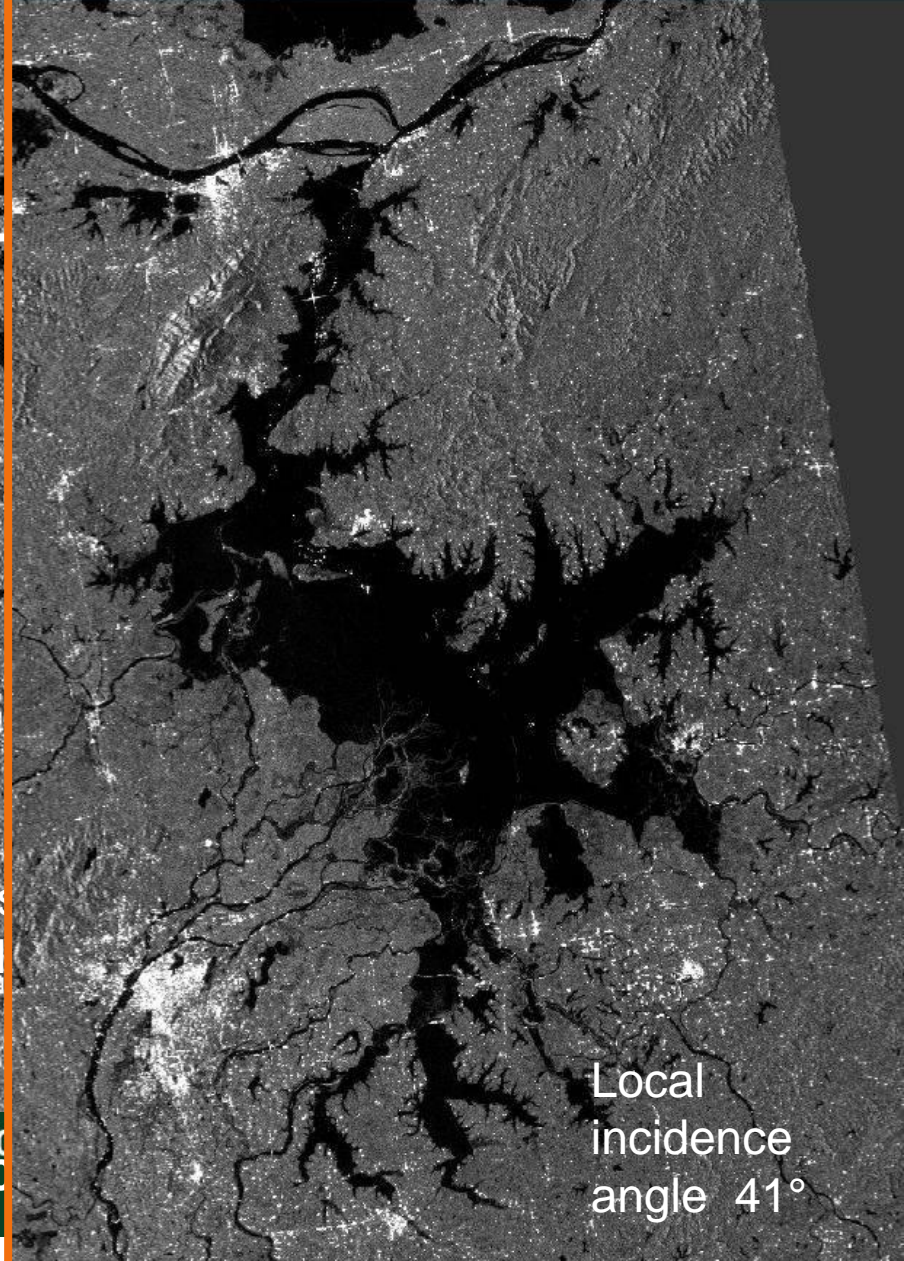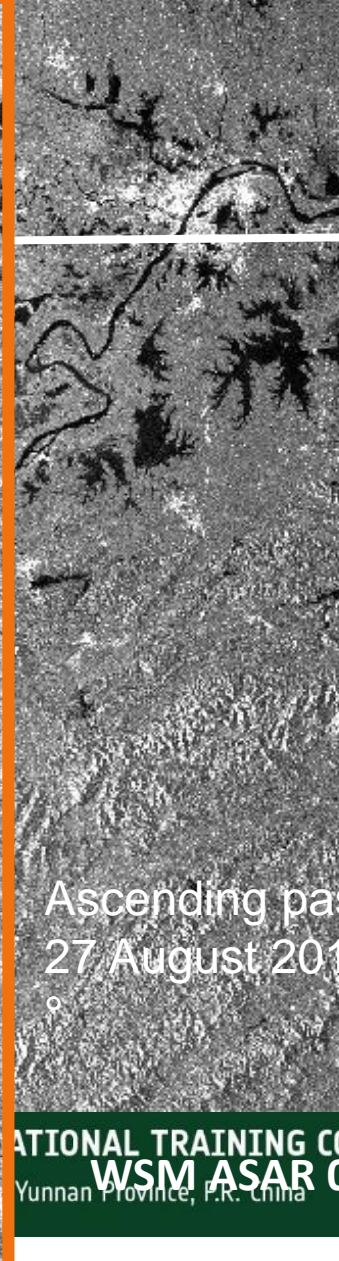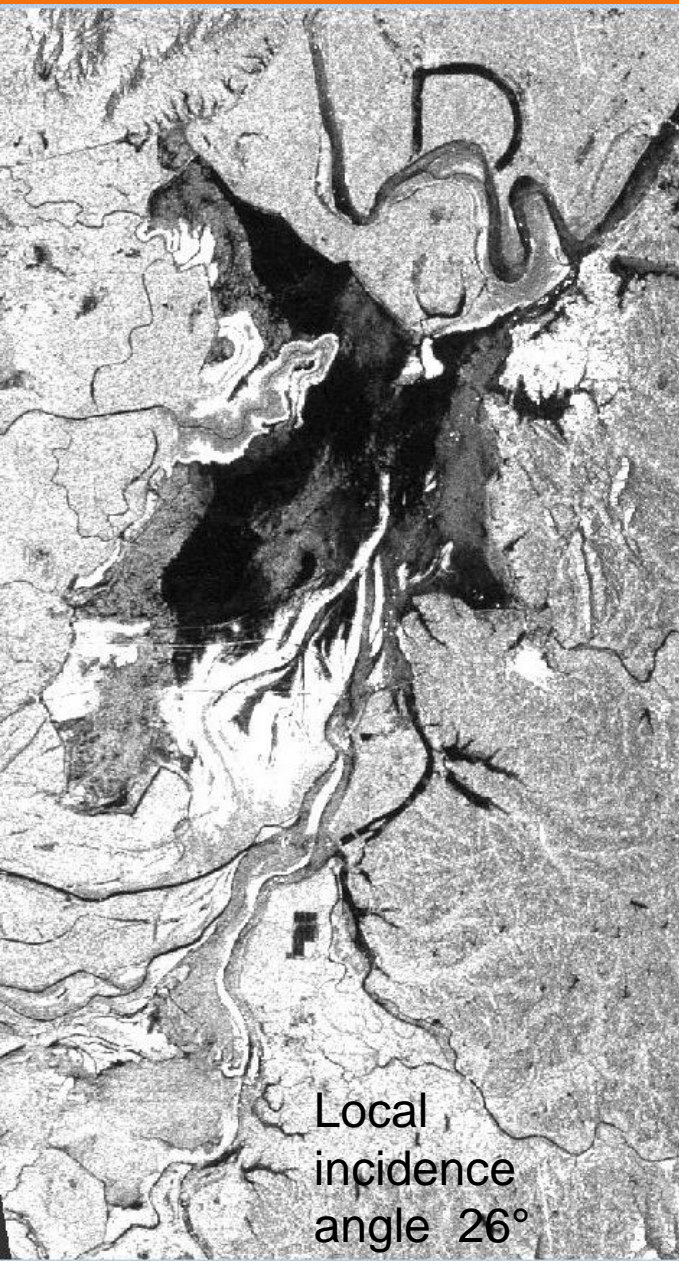

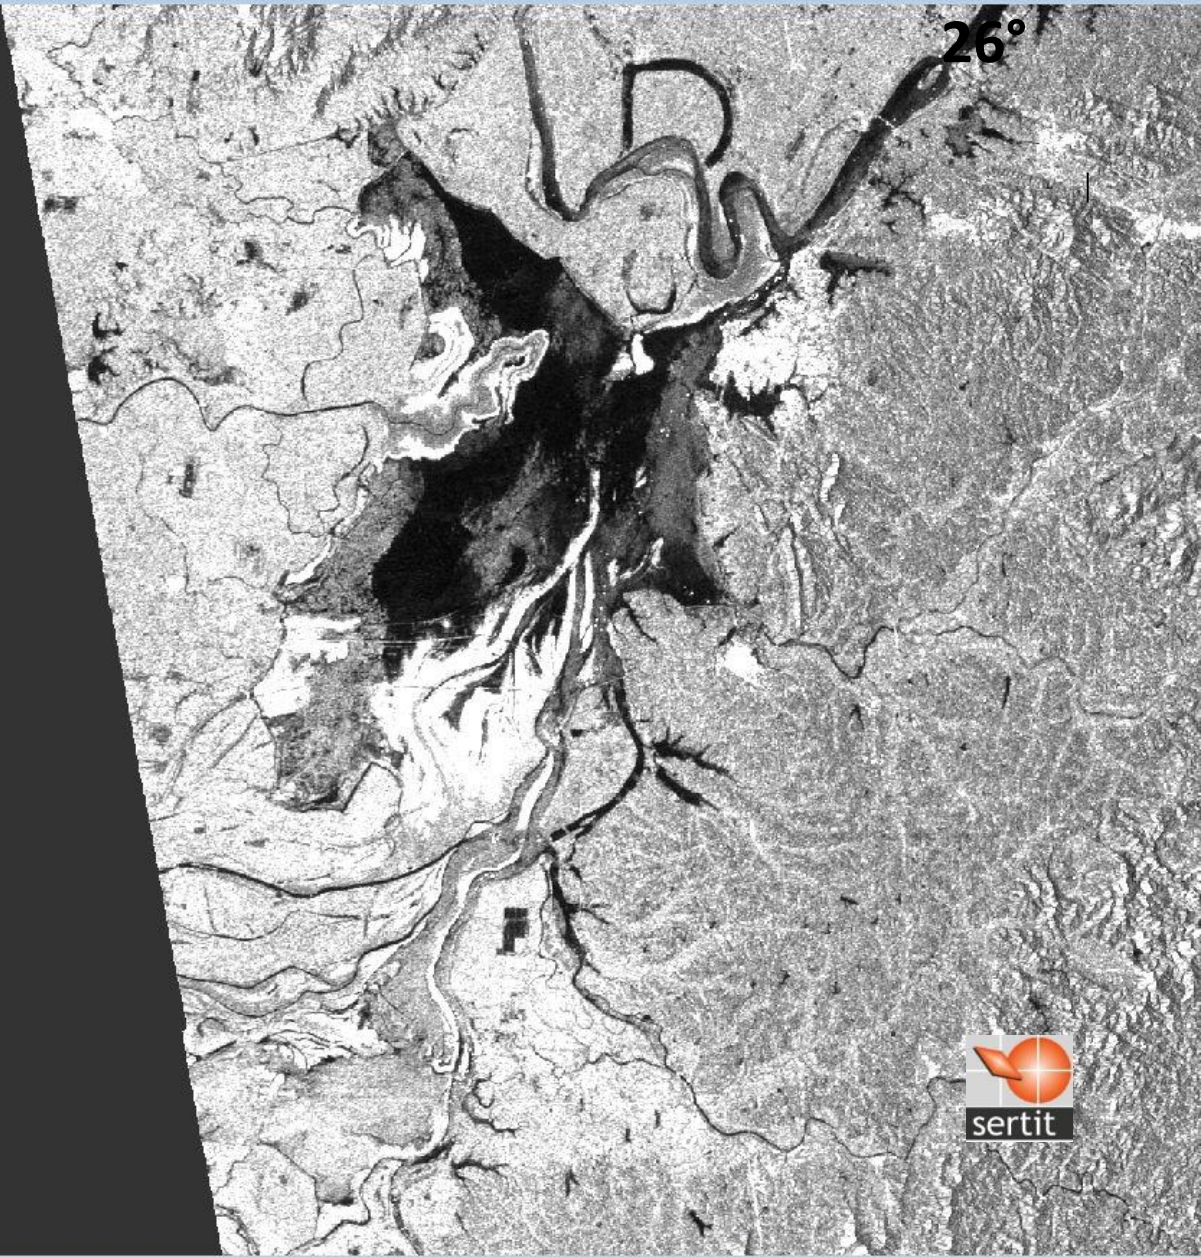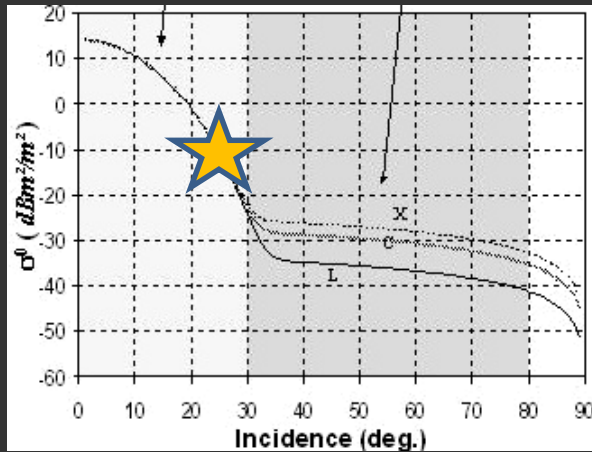


Dongting lake

Ascending pass

27 August 2010

Local incidence angle = 26

Plus wind and/or flooded
vegetation effect? °

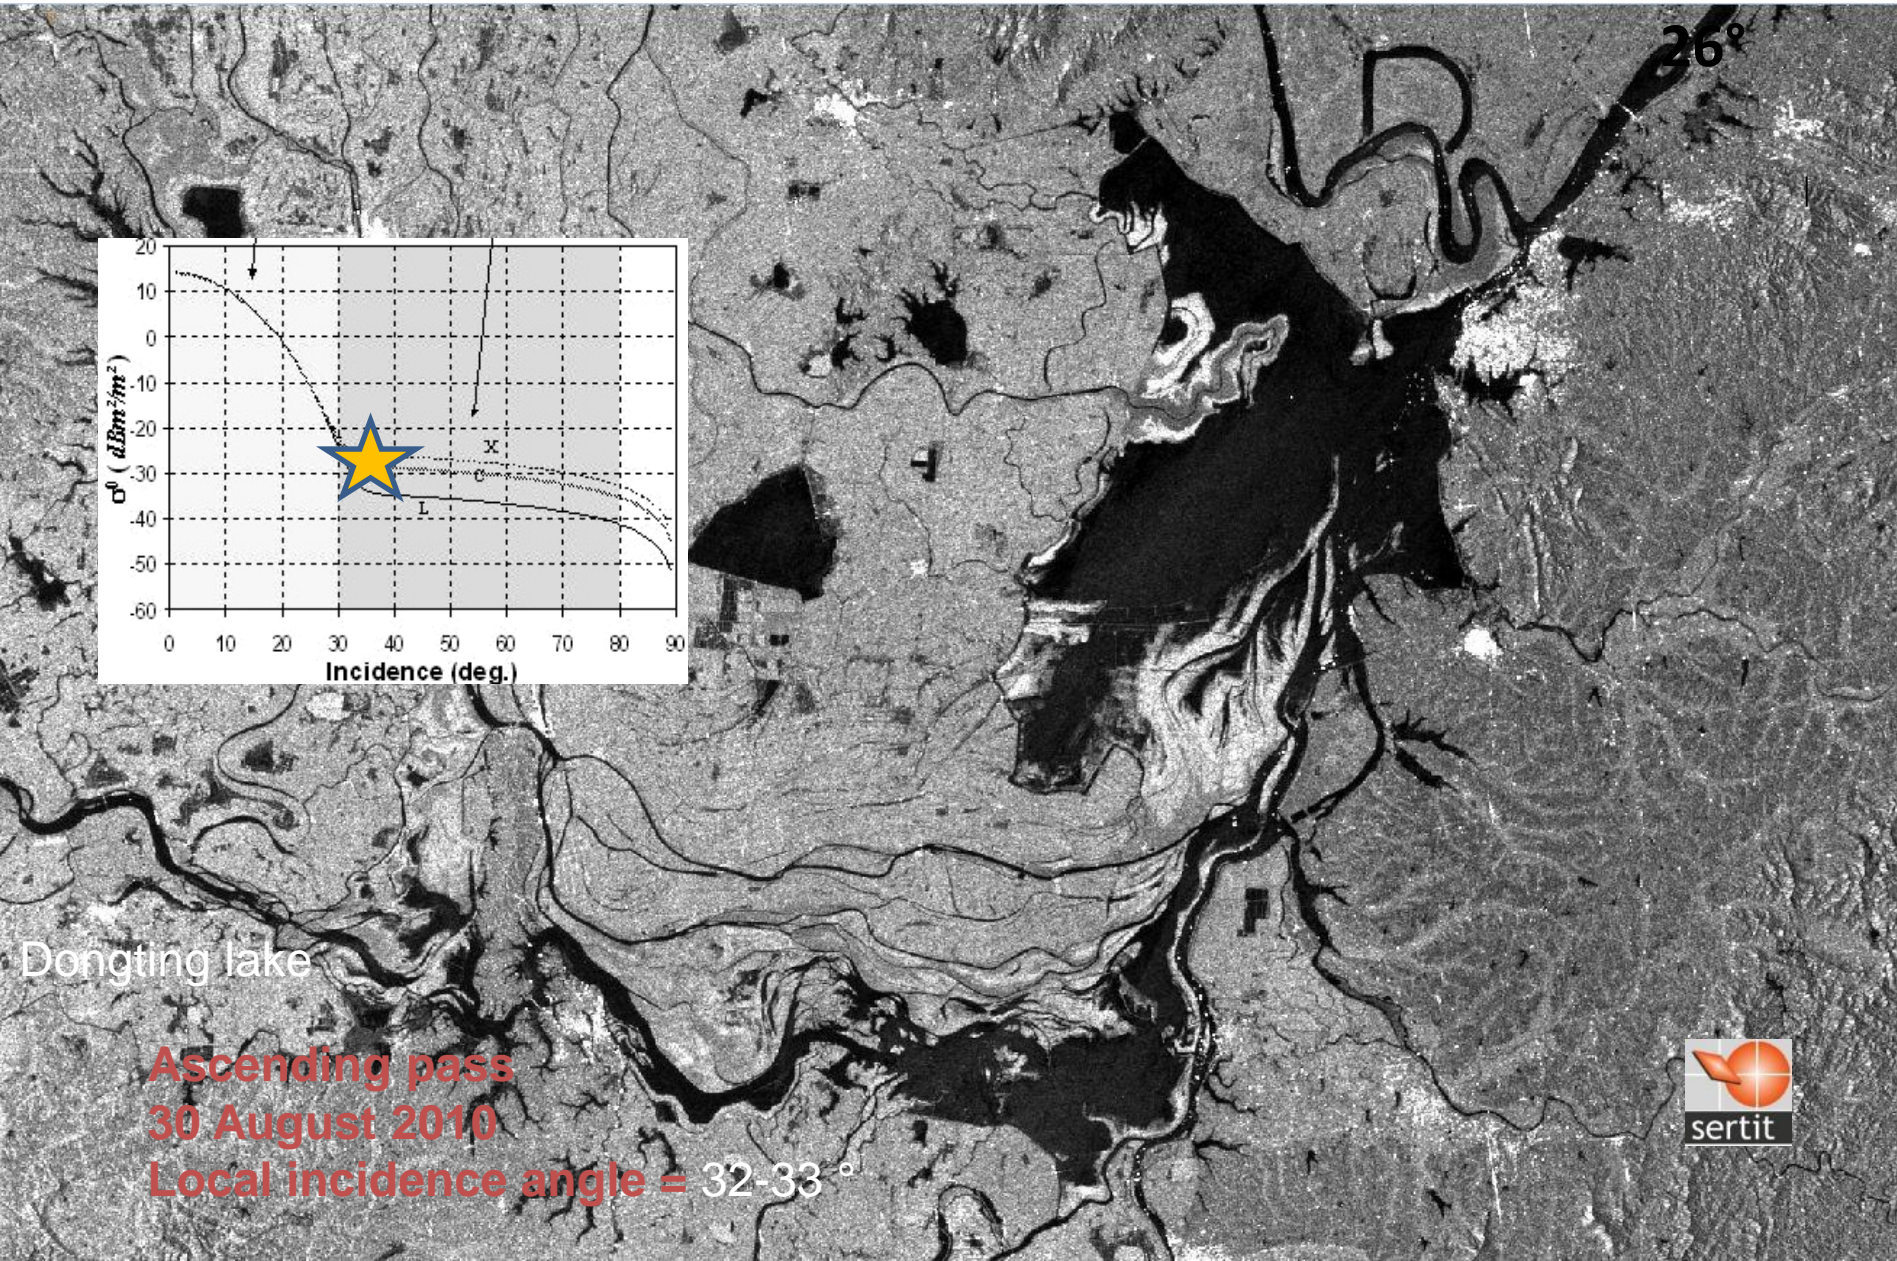

Dongting lake

Ascending pass
 30 August 2010
 Local incidence angle = 32-33°

Signal - Surface interactions Rayleigh criterion

Specular reflection (smooth surface)

$$h < \lambda / 8 \cos \theta$$

Diffuse reflection (rough surface)

$$h > \lambda / 8 \cos \theta$$

λ varies from

K 1cm

X 3cm


C 5.6cm

S 10cm


L 23cm

P 70cm


HJ-C
ALOS PALSAR

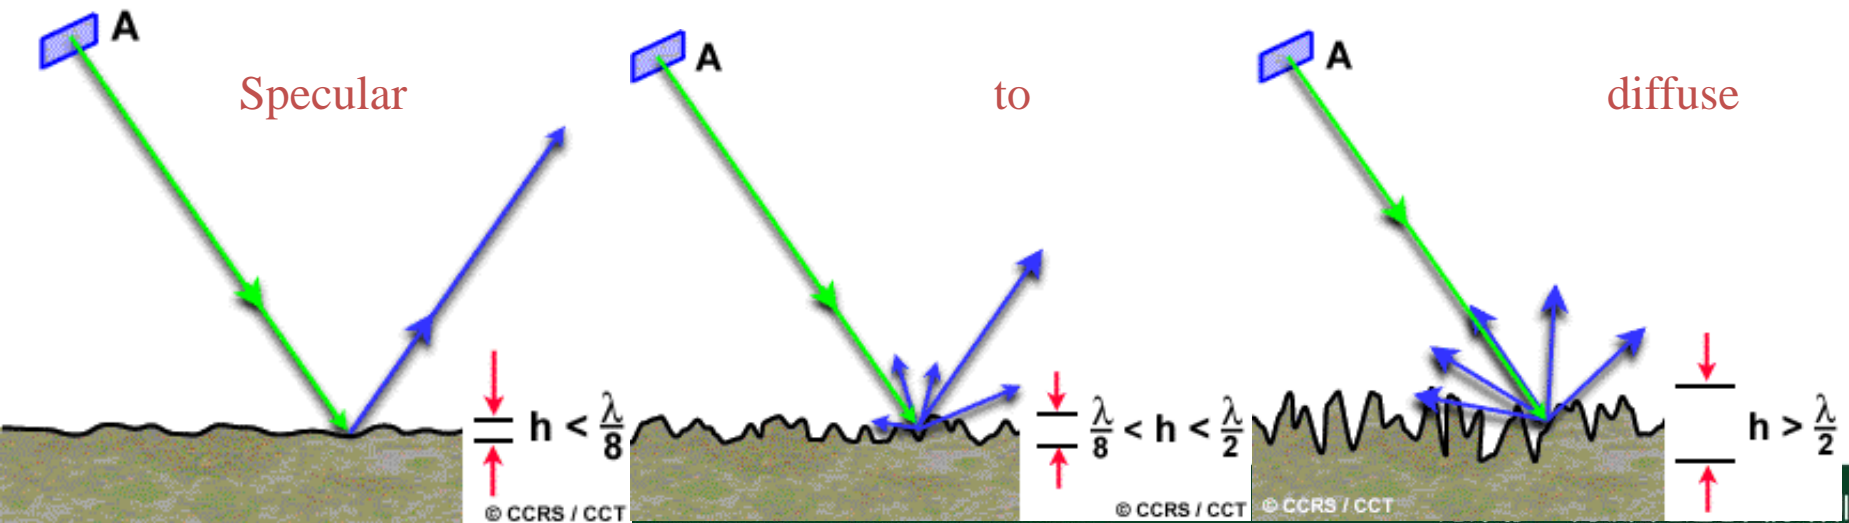


Water backscattering in function of surface roughness

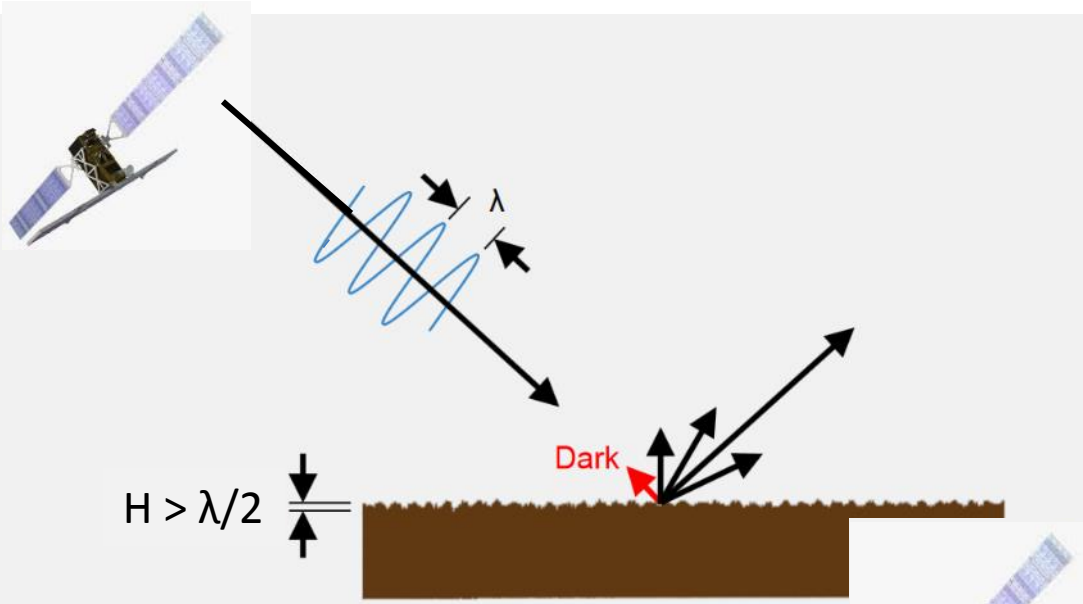



Case of soil surface

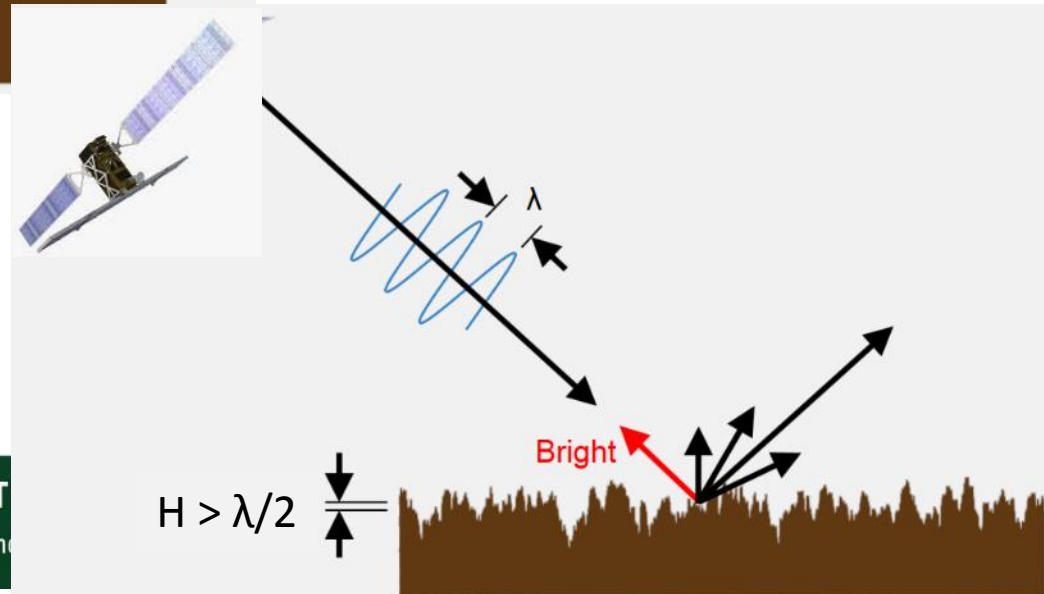

Adapted from Sang-Ho Yun, NASA JPL

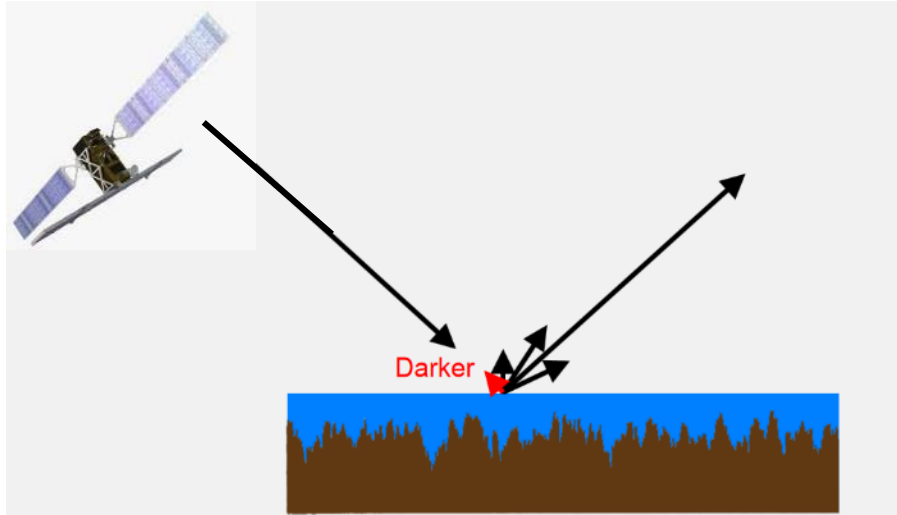


Case of water surface in various environments

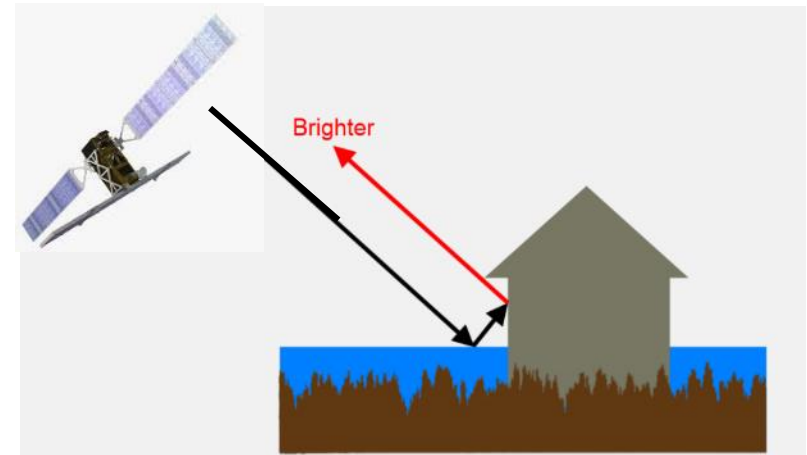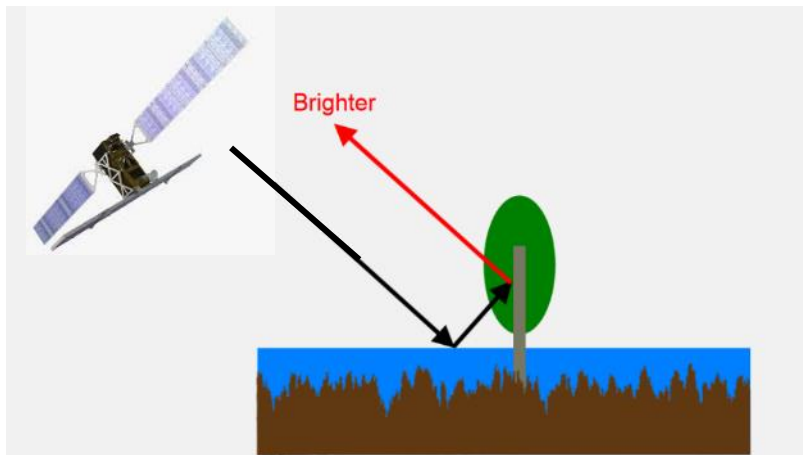

Adapted from Sang-Ho Yun, NASA JPL

SAR and Urban area: December 2016 Flood in York, England, based on Radarsat 2 imagery:

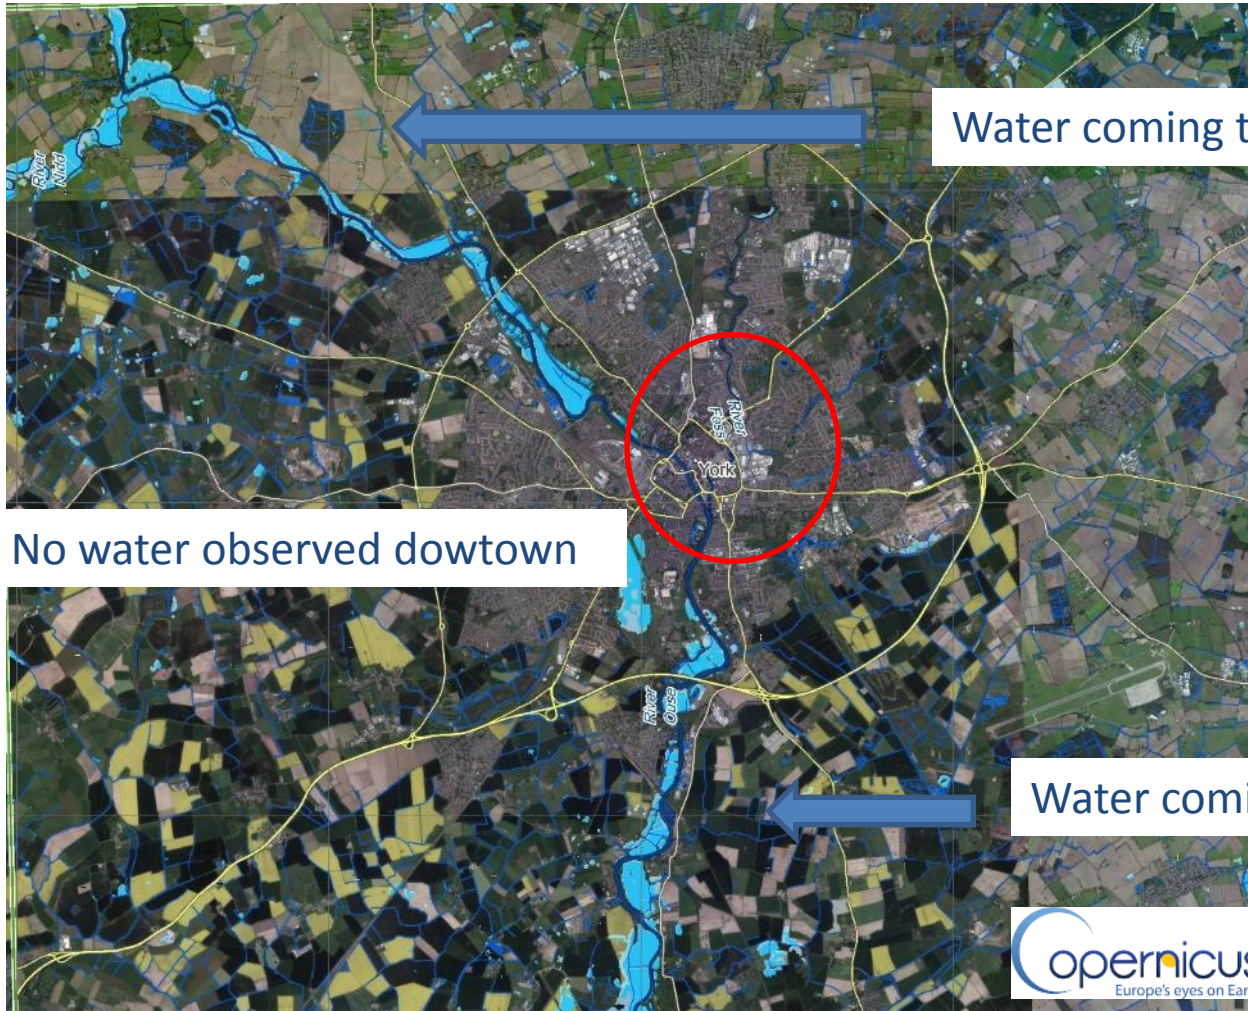

Water coming towards the city

No water observed downtown

Water coming out the city

**Illustration
of SAR
limitation in
Urban area**

SAR and Urban area: December 2016 Flood in York, England, based on Radarsat 2 imagery:




No water observed downtown




English Prime Minister visiting the affected York downtown

SAR and Urban area: December 2016 Flood in York, England, based on Radarsat 2 imagery:

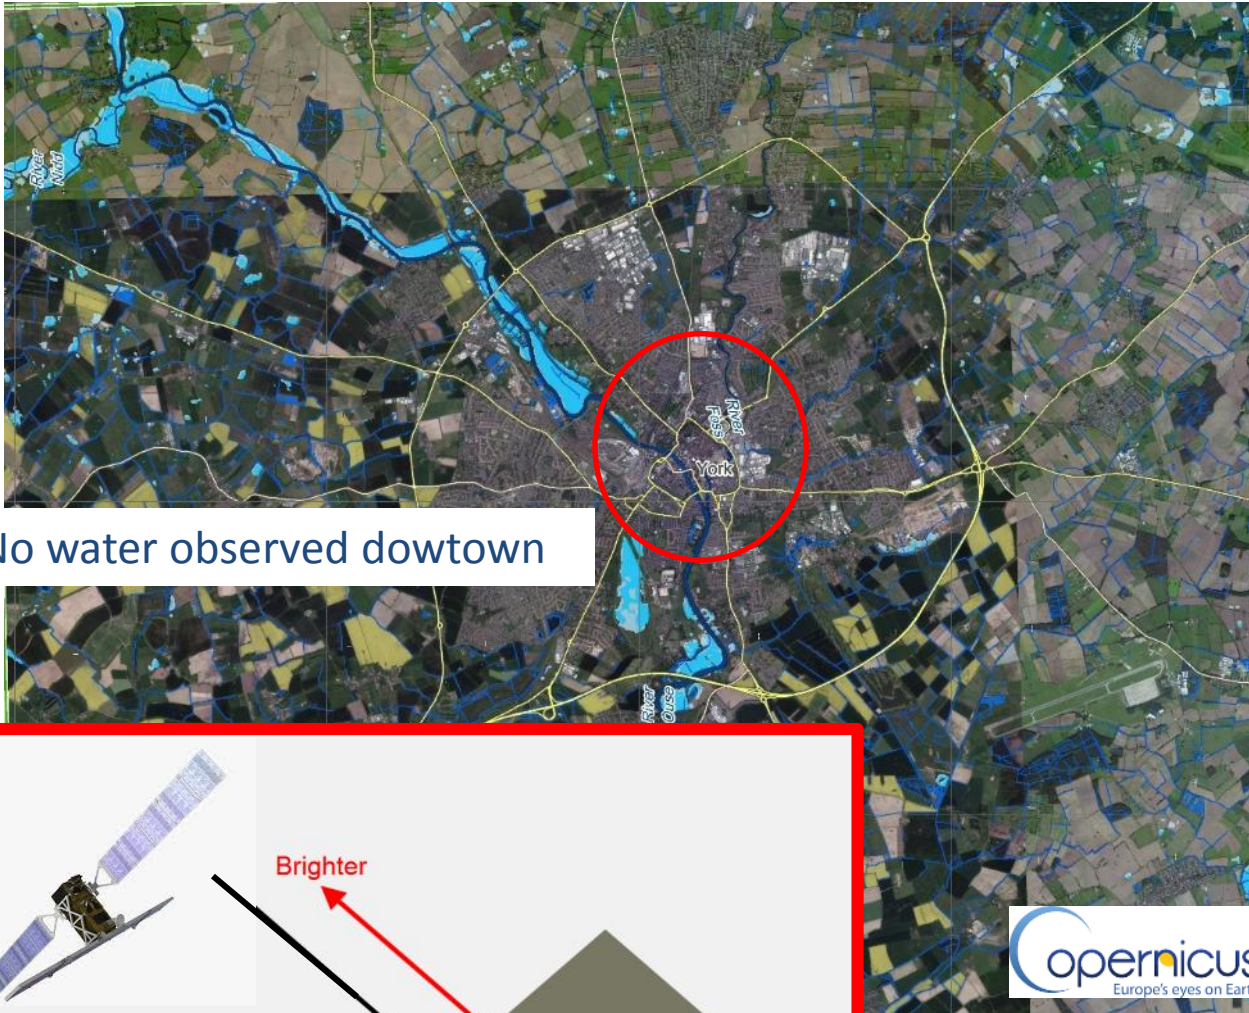

No water observed downtown

Strong SAR signal in urban environment no capability for water recognition

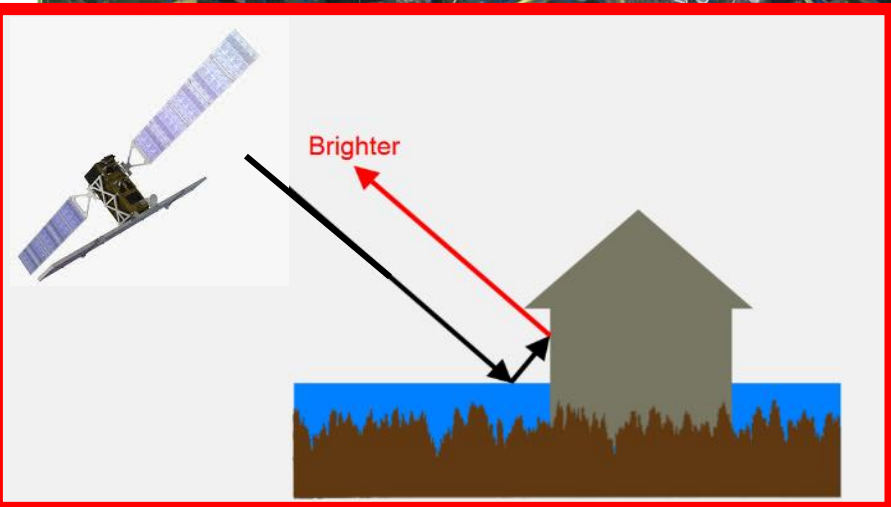

Water backscattering in function of surface roughness

PALSAR bande L HH/HV




ASAR bande C HH/HV

TerraSar bande X HH/HV

Low level of water
 Commision between mud
 banks and open water


Intermediate level of water

Low level of water
 Good différenciation
 between mud/water

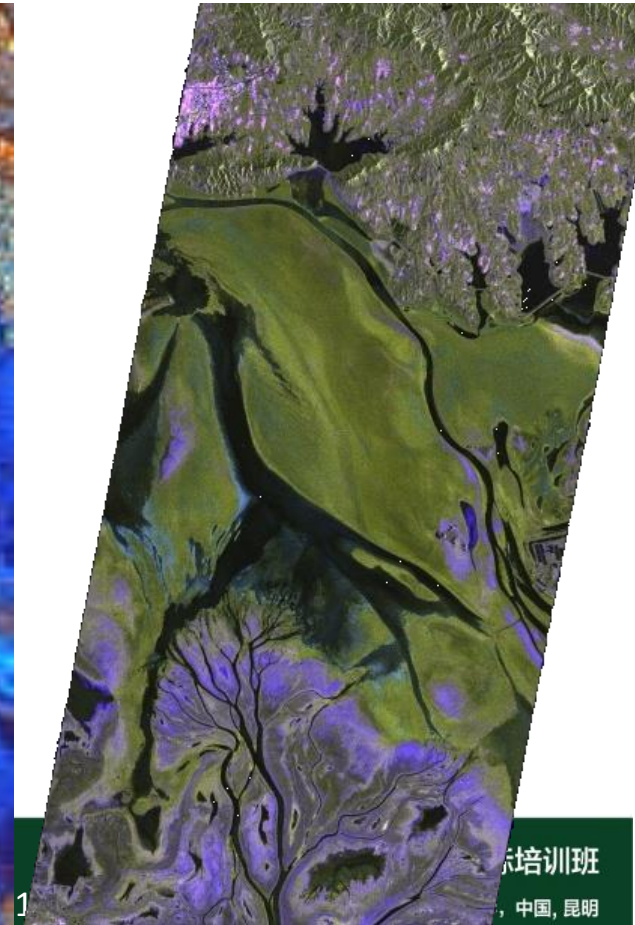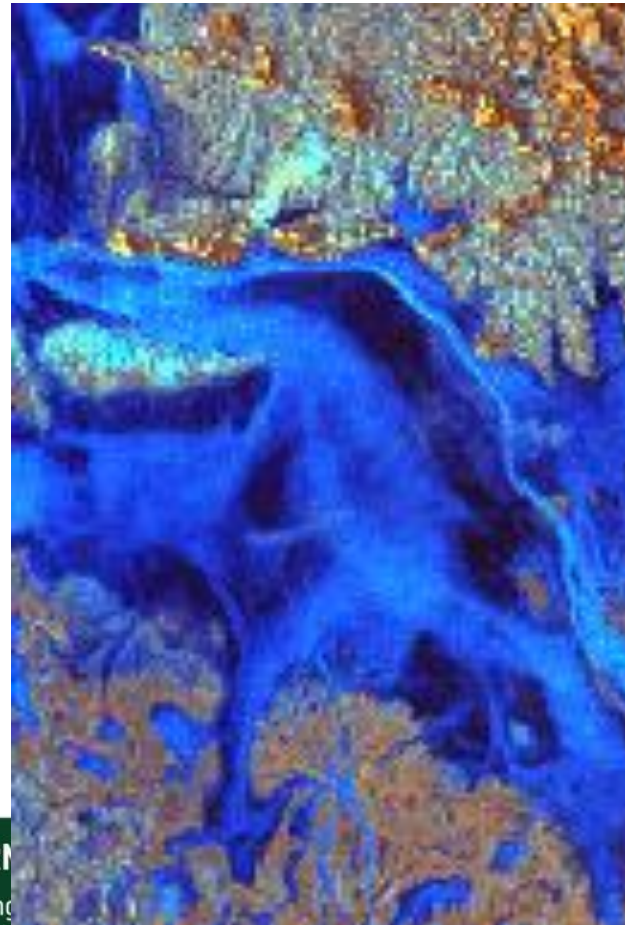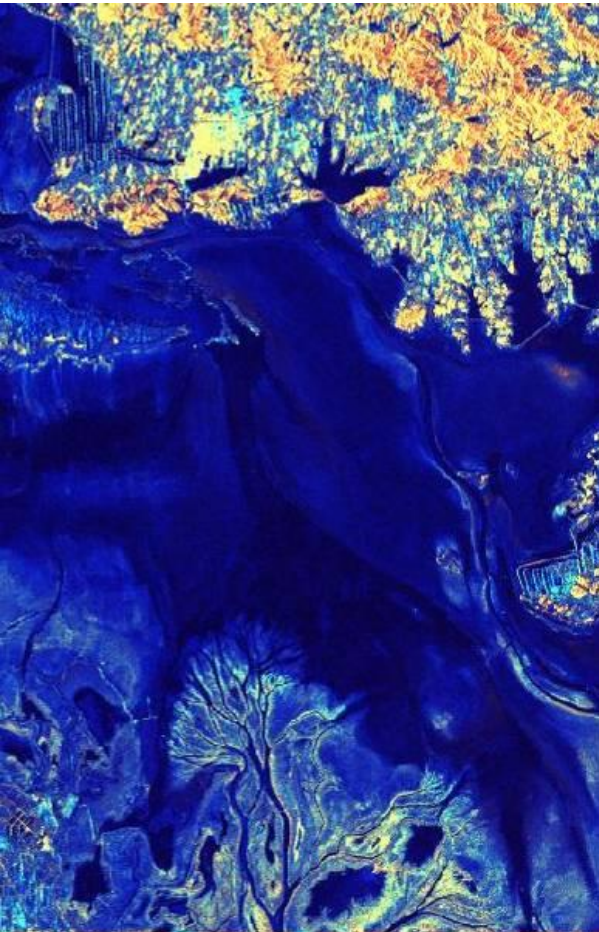

Water backscattering in function of surface roughness

PALSAR bande L HH,
ScanSAr mode,
10h56 the 2010 03 01

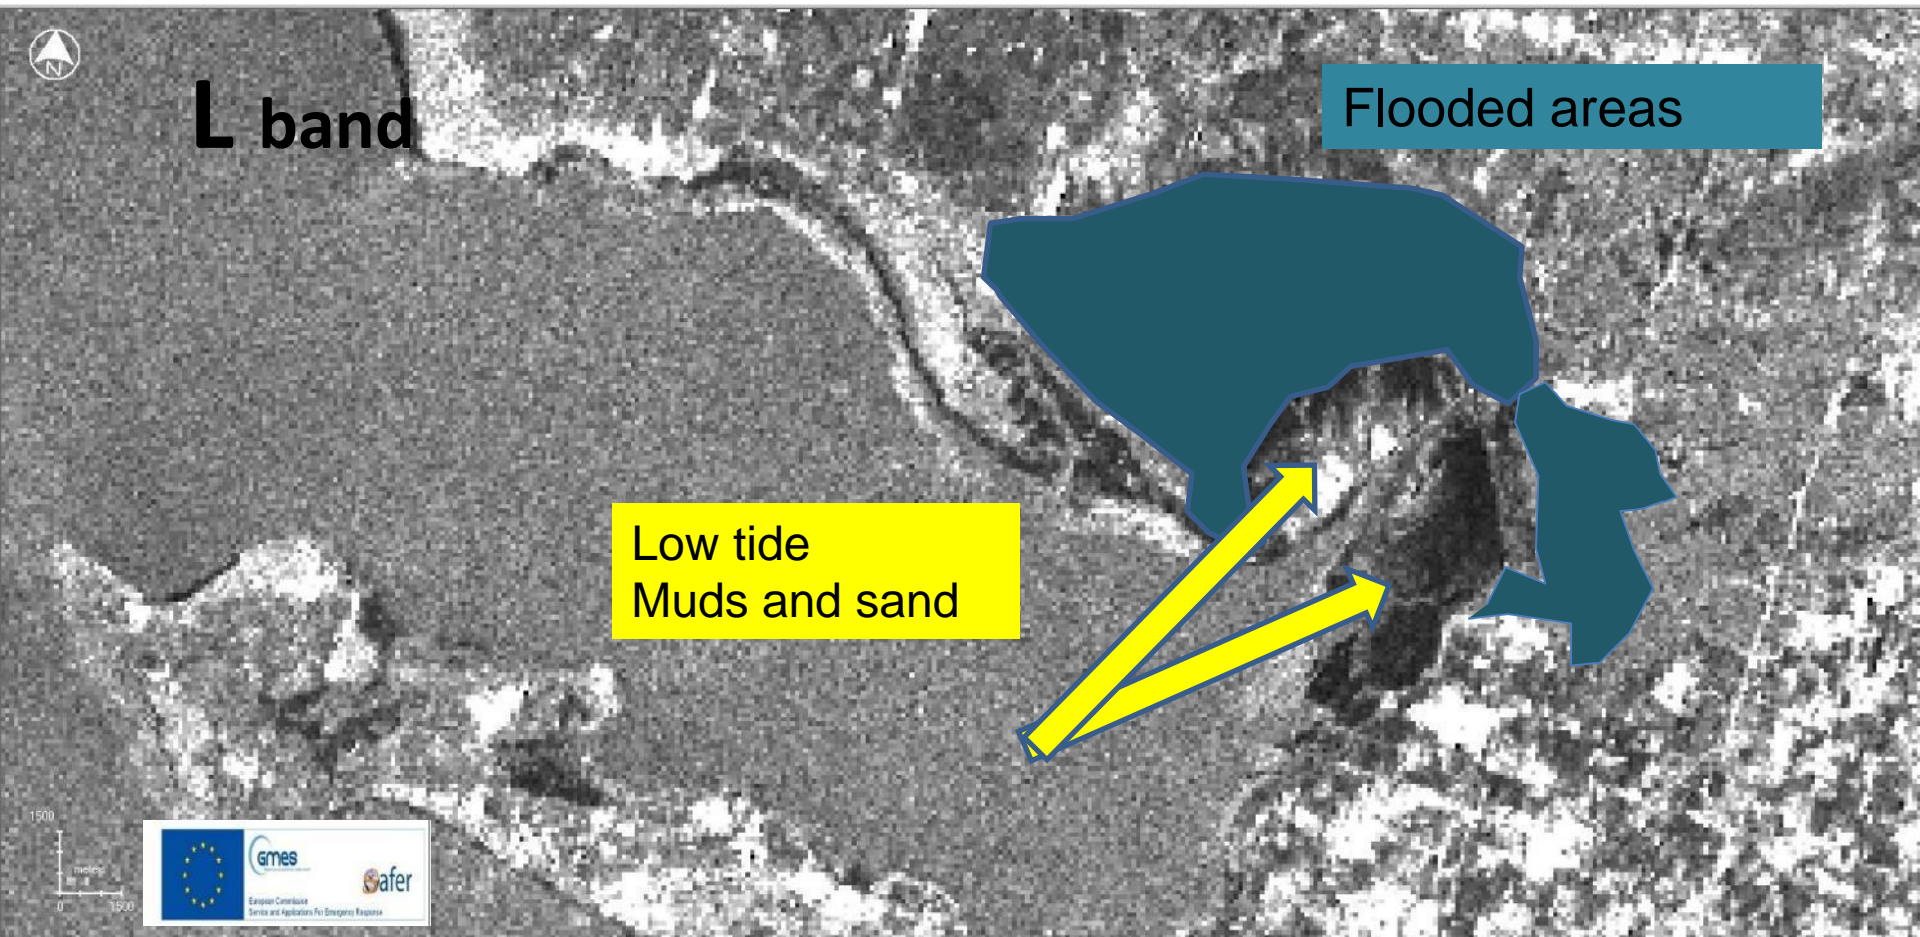

Water backscattering in function of surface roughness

TerraSAR X: 2010 03 03

X band

Windy Condition
Rough water surface
Backscattering increase


ASAR ENVISAT
APP HH HV,
10h18 the 2010 03 04

Water backscattering in function of surface roughness



Water backscattering in function of surface roughness

TerraSAR X: 2010 03 06

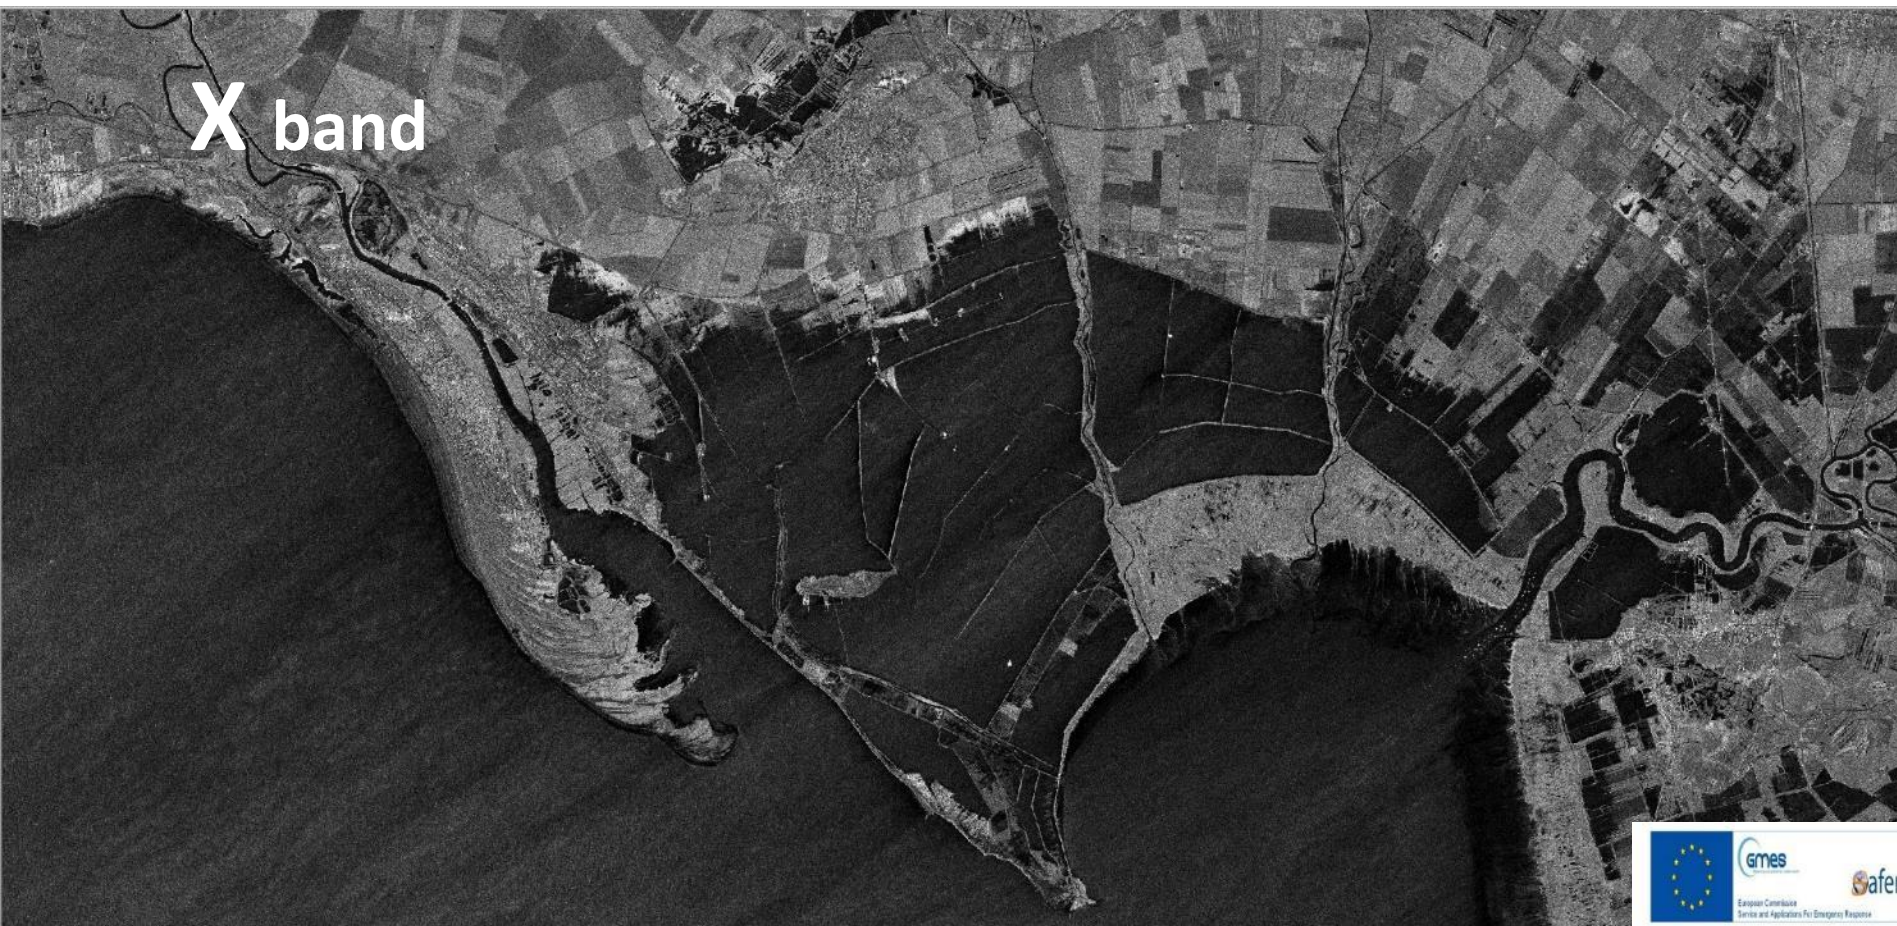

SAR: All weather system

Yes but !!!!

Distortions in the SAR observational data come from various factors.


Absorption by the atmosphere (oxygen, water vapor, and so on.)	Observation Frequency	Example of SAR	Meteorological Particle	FR
Scattering by the weather particle (Rain, snow, fog, and hail, etc.)	X-Band	TerraSAR-X (9.65 GHz)	Important Negligible	Negligible Important
	C-Band	RADARSAT-2 (5.405GHz)		
Faraday Rotation (FR) Phenomenon of polarization rotation)	L-Band	PALSAR (1.27GHz)		

Signal attenuation by clouds and rain for smaller wavelengths


©DLR SIR-C www.cp.dlr.de/ne-hf/SRL-2/Images-SRL-2.html



Bande X (3 cm)

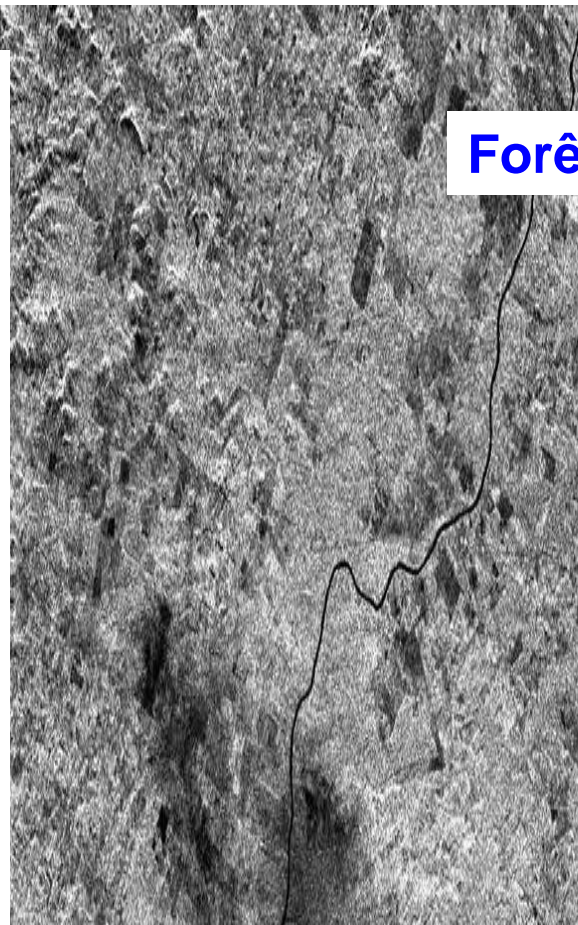


Bande C (5.6 cm)

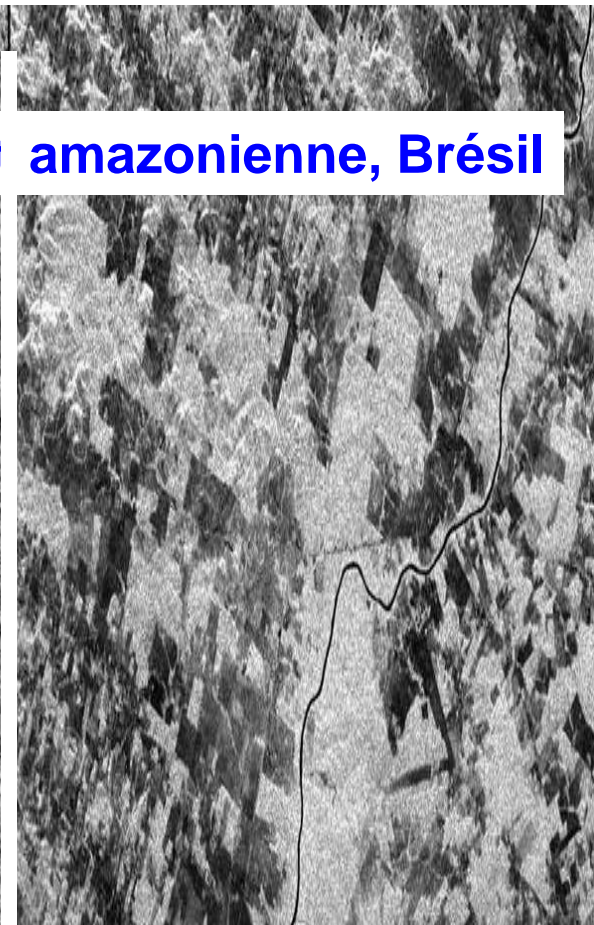

Bande L (25 cm)


Forêt amazonienne, Brésil

Signal attenuation by rain (XSAR, MALI, 1994) – clouds and its shadow

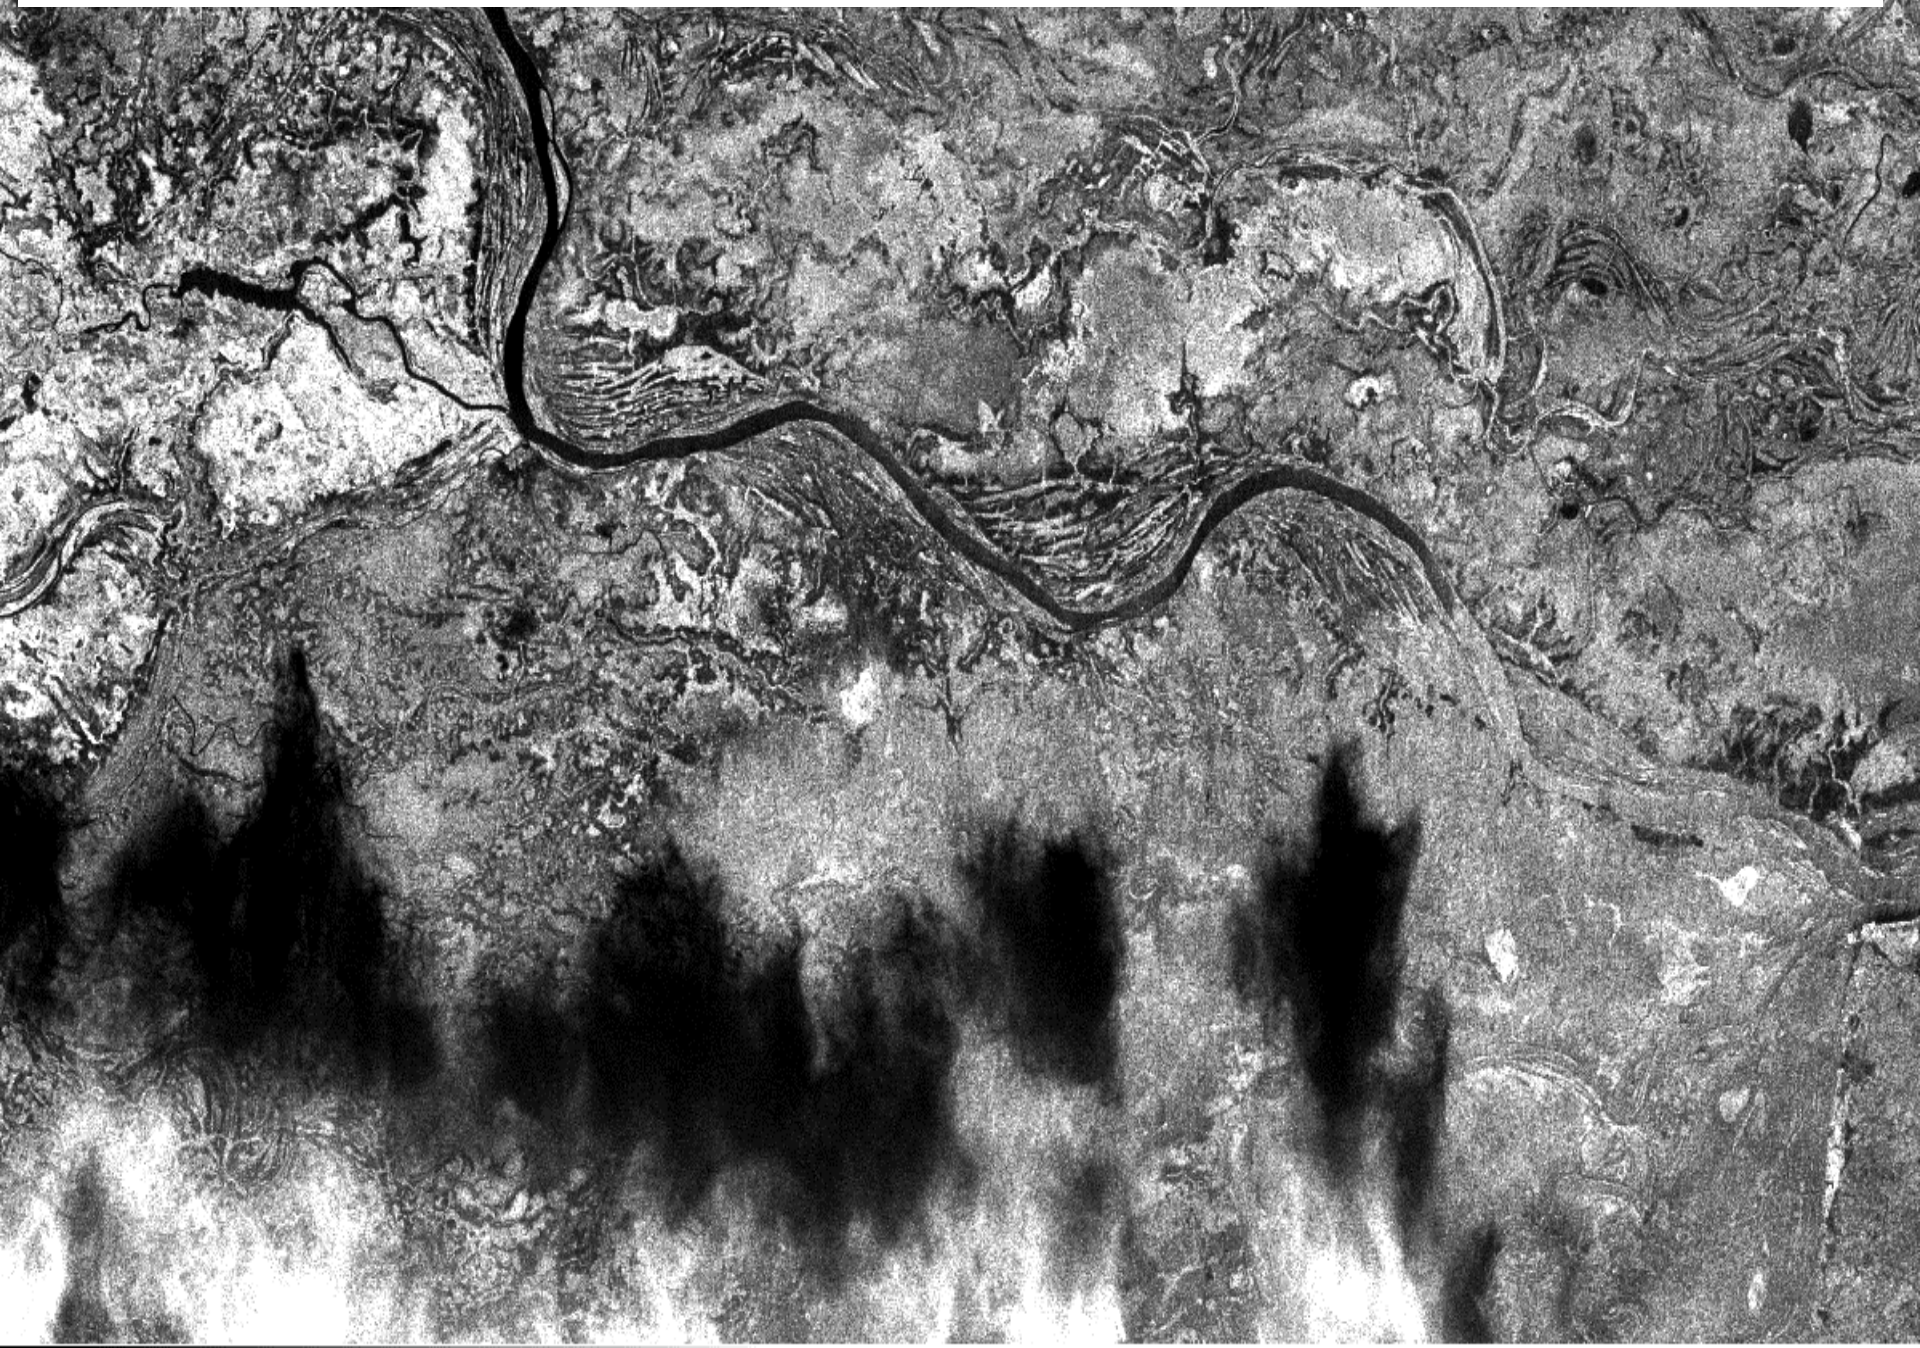

Water backscattering in function of water surface roughness: rain

X band

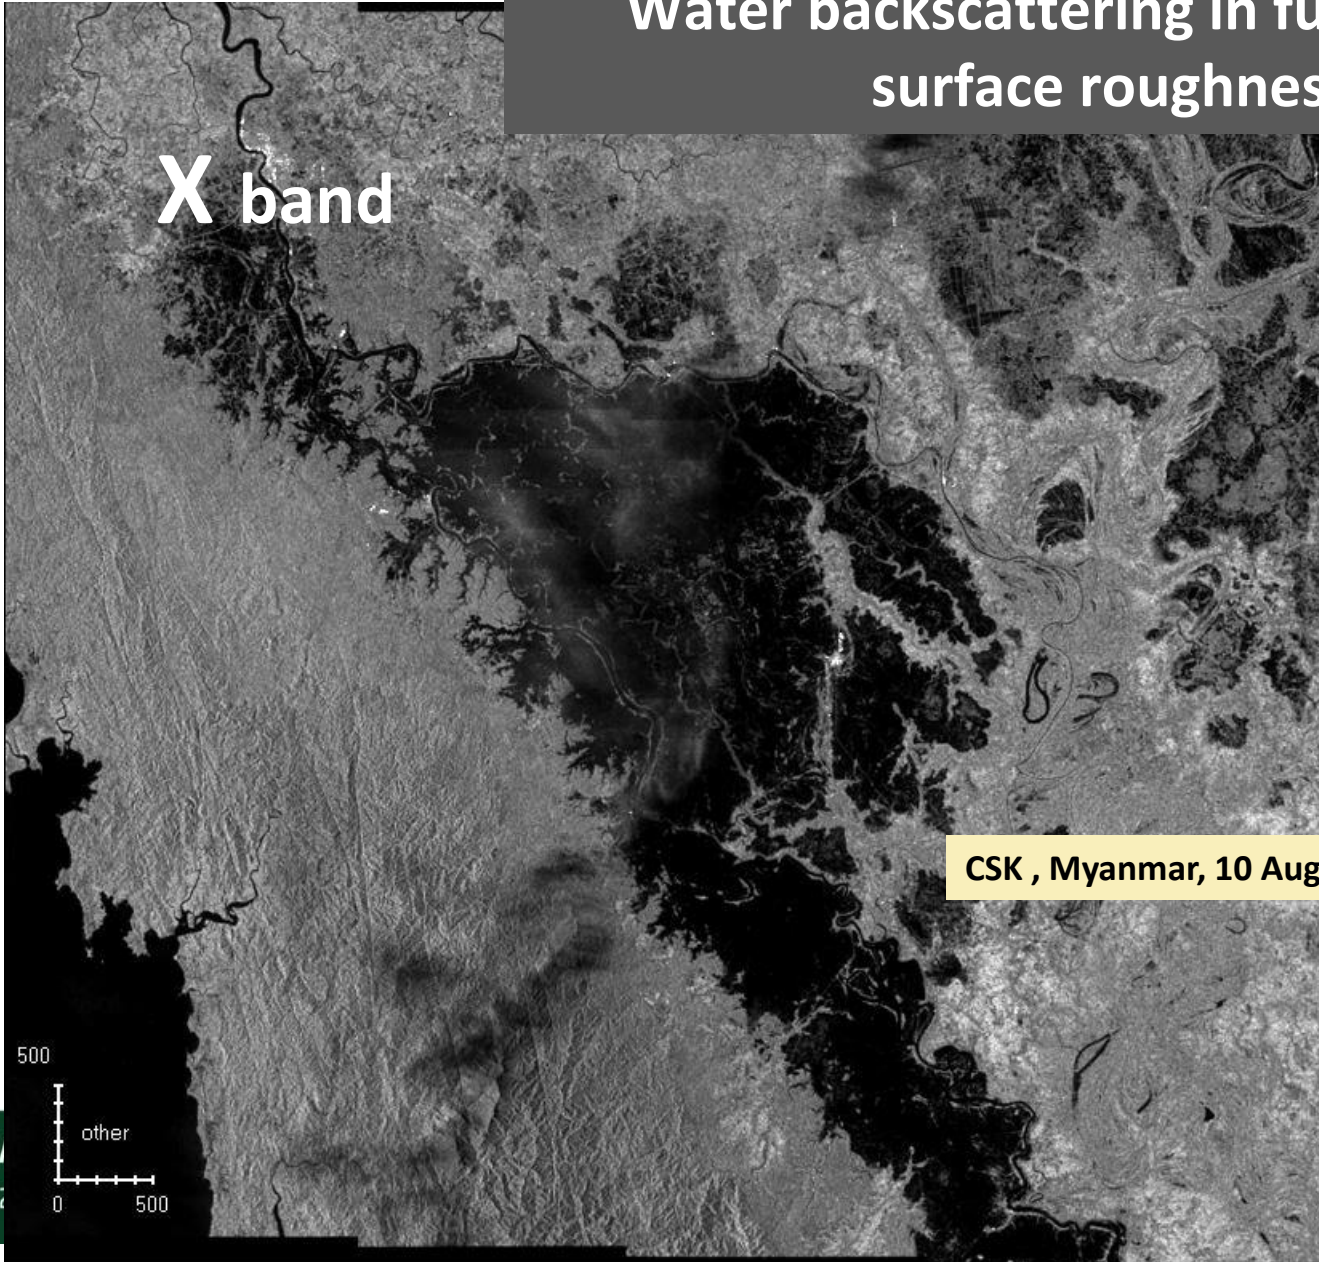

CSK , Myanmar, 10 August 2015


500
0 500
other

“龙计划4” 高级陆地遥感国际培训班

2017年11月20日—11月25日 云南师范大学, 中国, 昆明

Water backscattering in function of water surface roughness: rain


X band

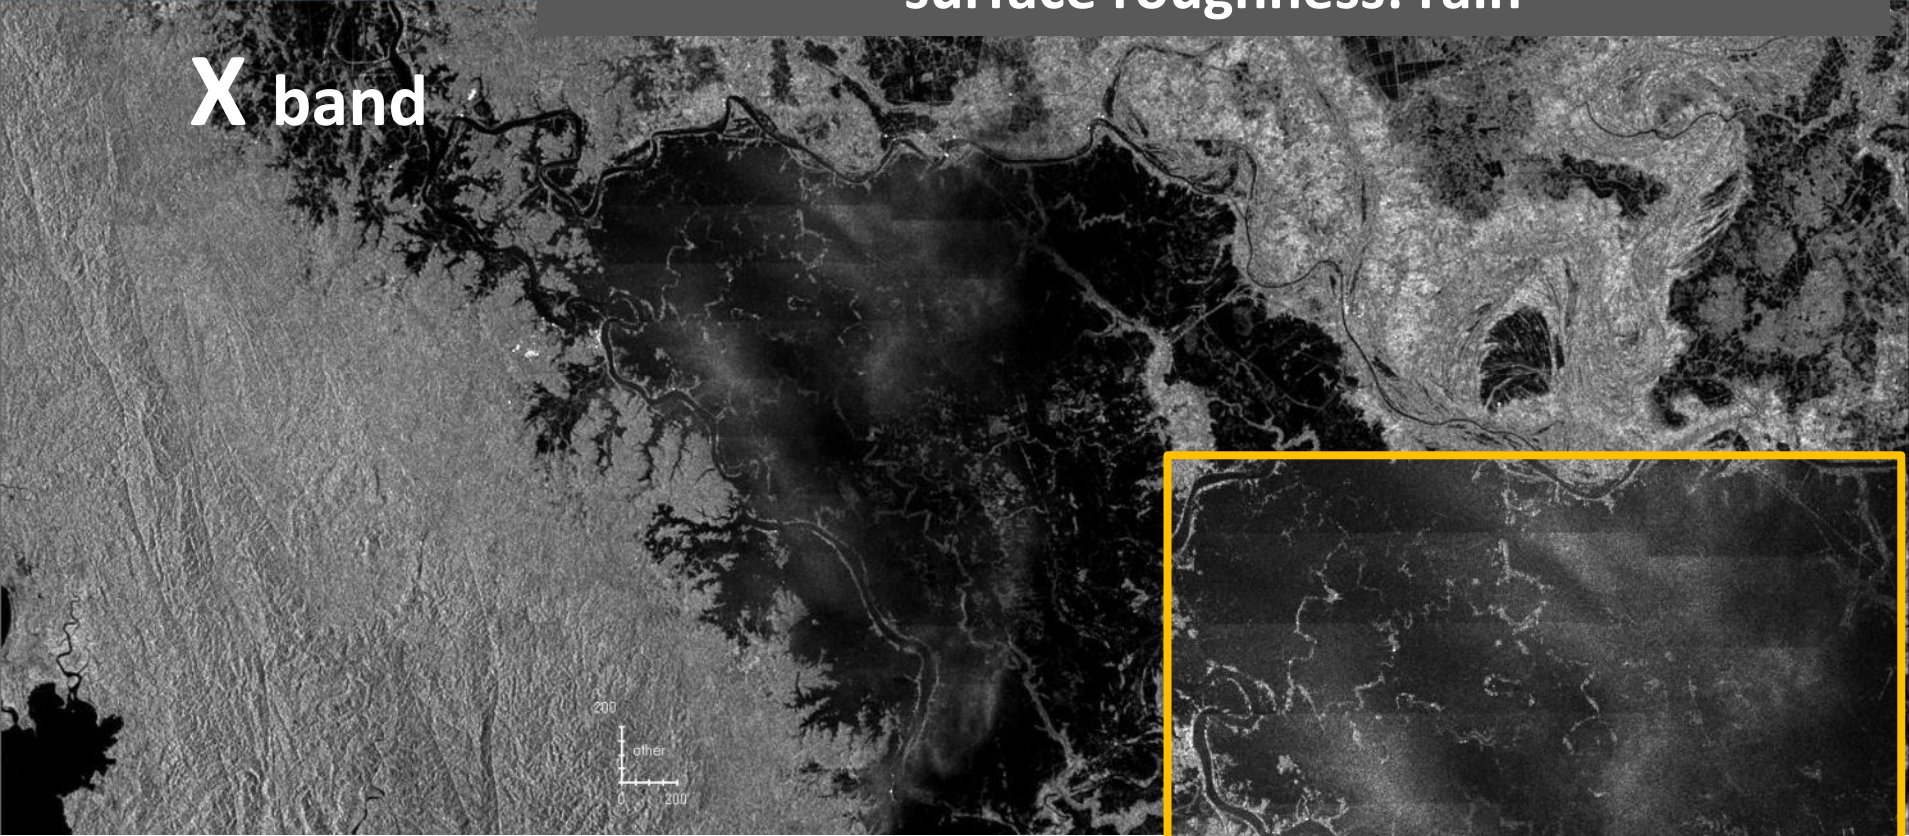

CSK , Myanmar, 10 August 2015


Water backscattering in function of water surface roughness: rain

X band

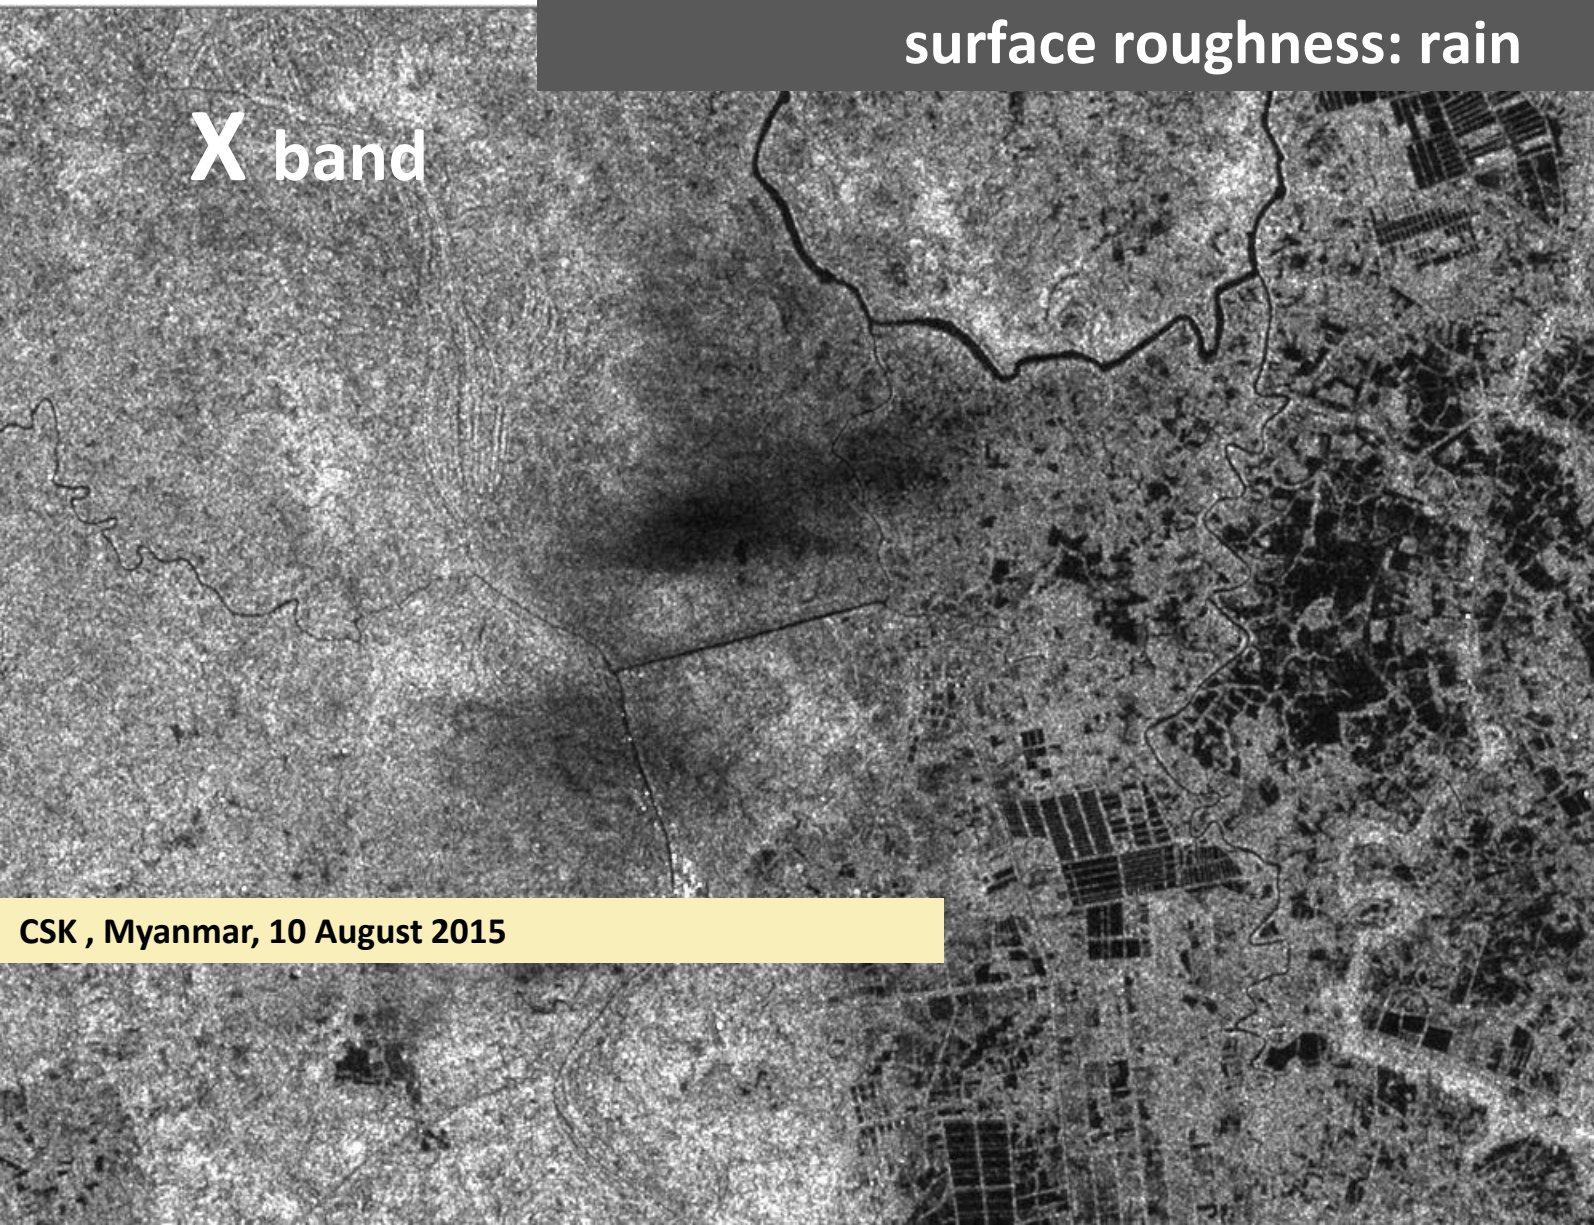


CSK , Myanmar, 10 August 2015

Water backscattering in function of water surface roughness: rain & wind

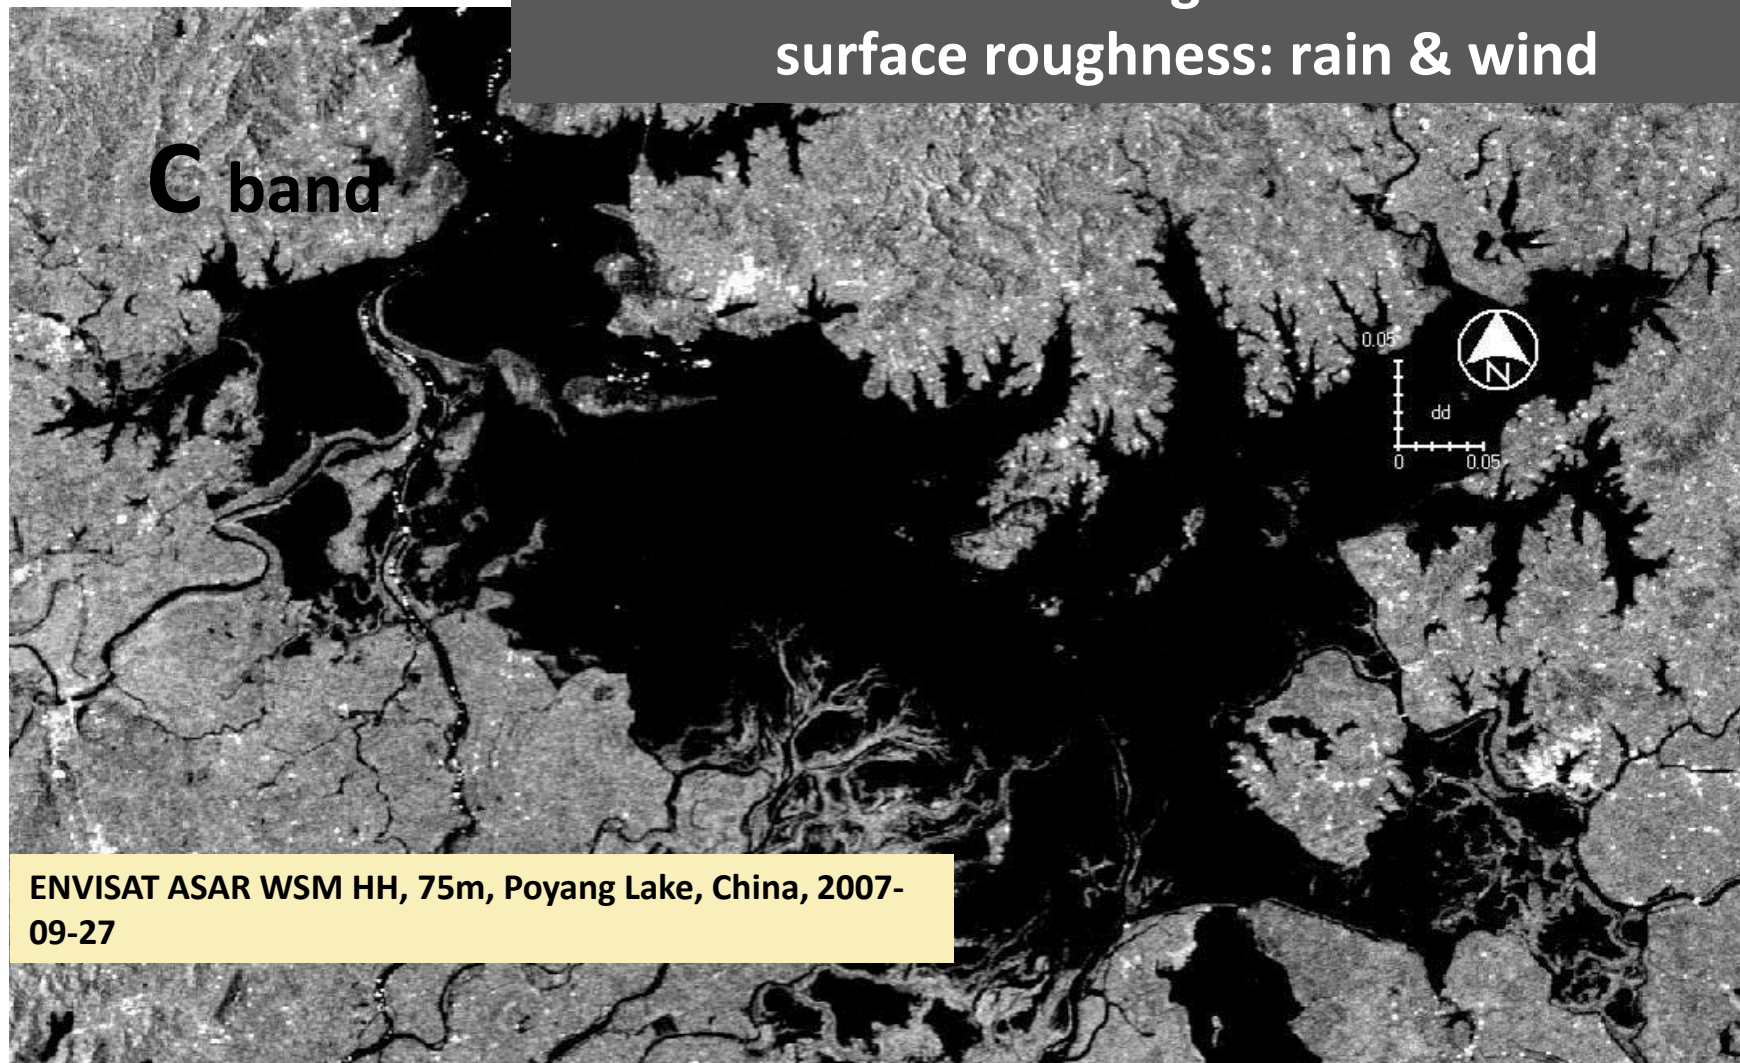


Water backscattering in function of water surface roughness: rain & wind

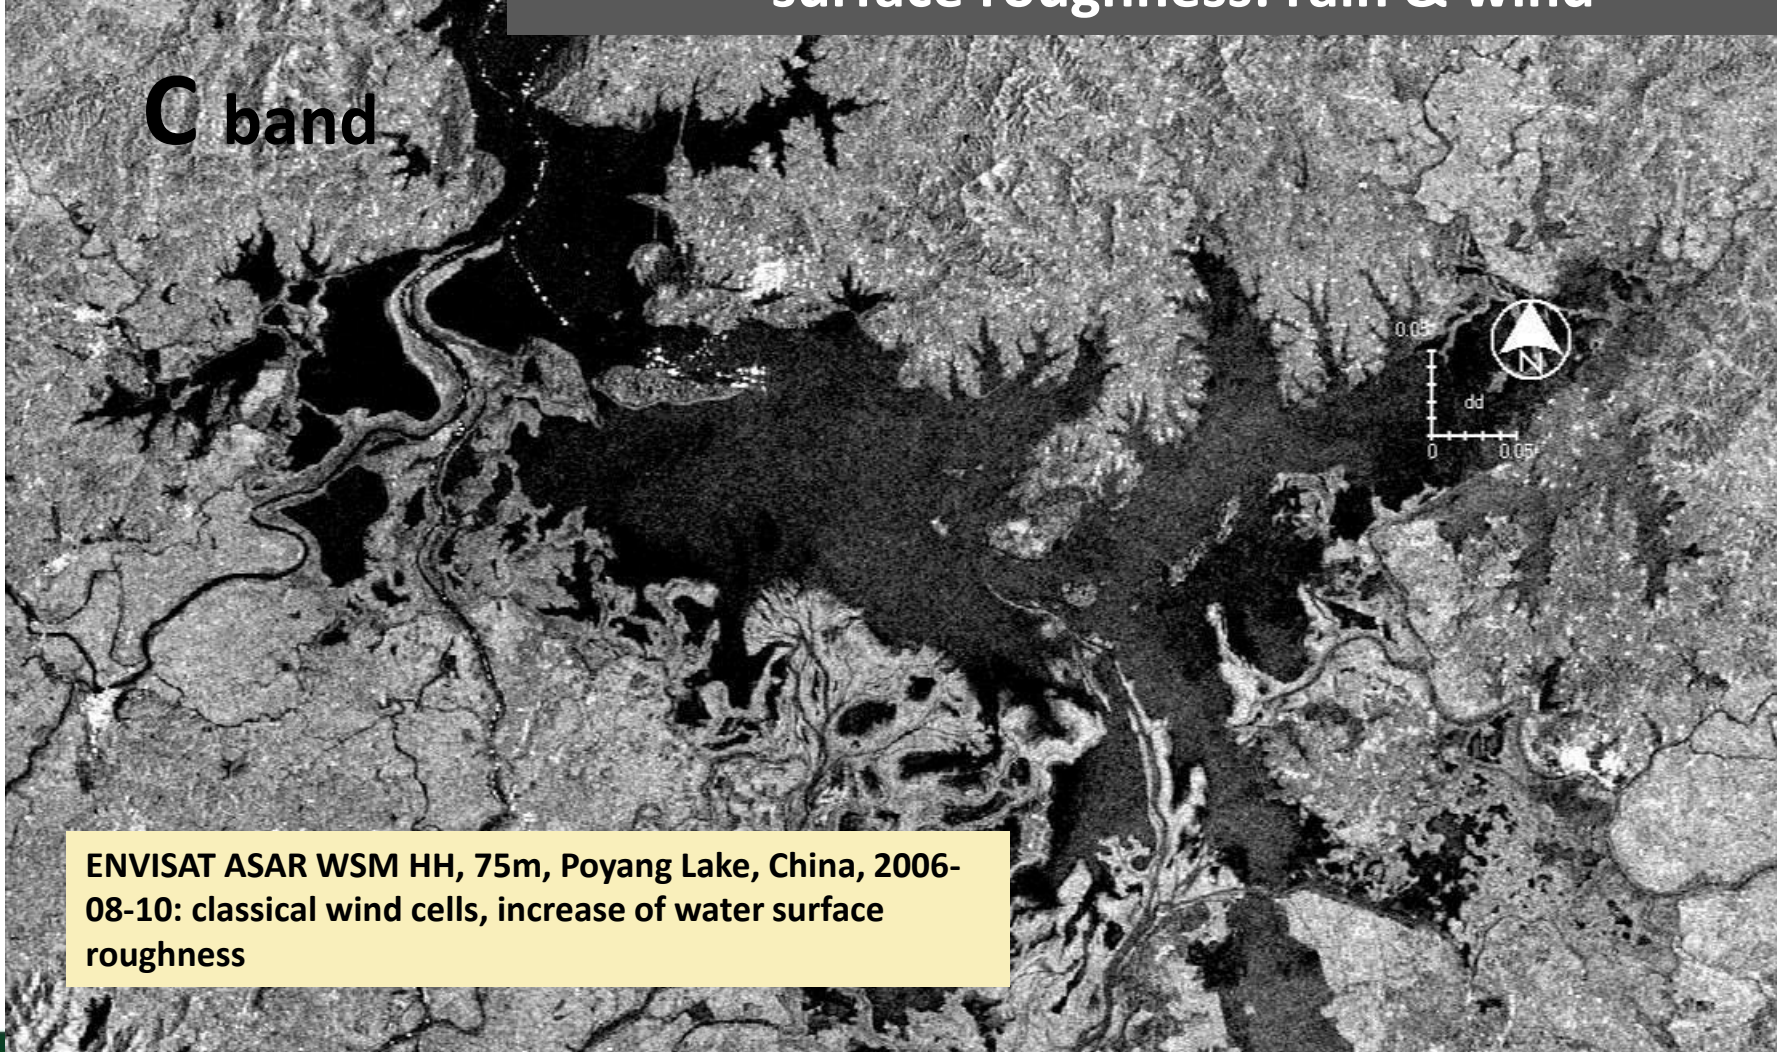

ENVISAT ASAR WSM HH, 75m, Poyang Lake, China, 2006-08-10: classical wind cells, increase of water surface roughness


Water backscattering in function of water surface roughness: rain & wind

C band

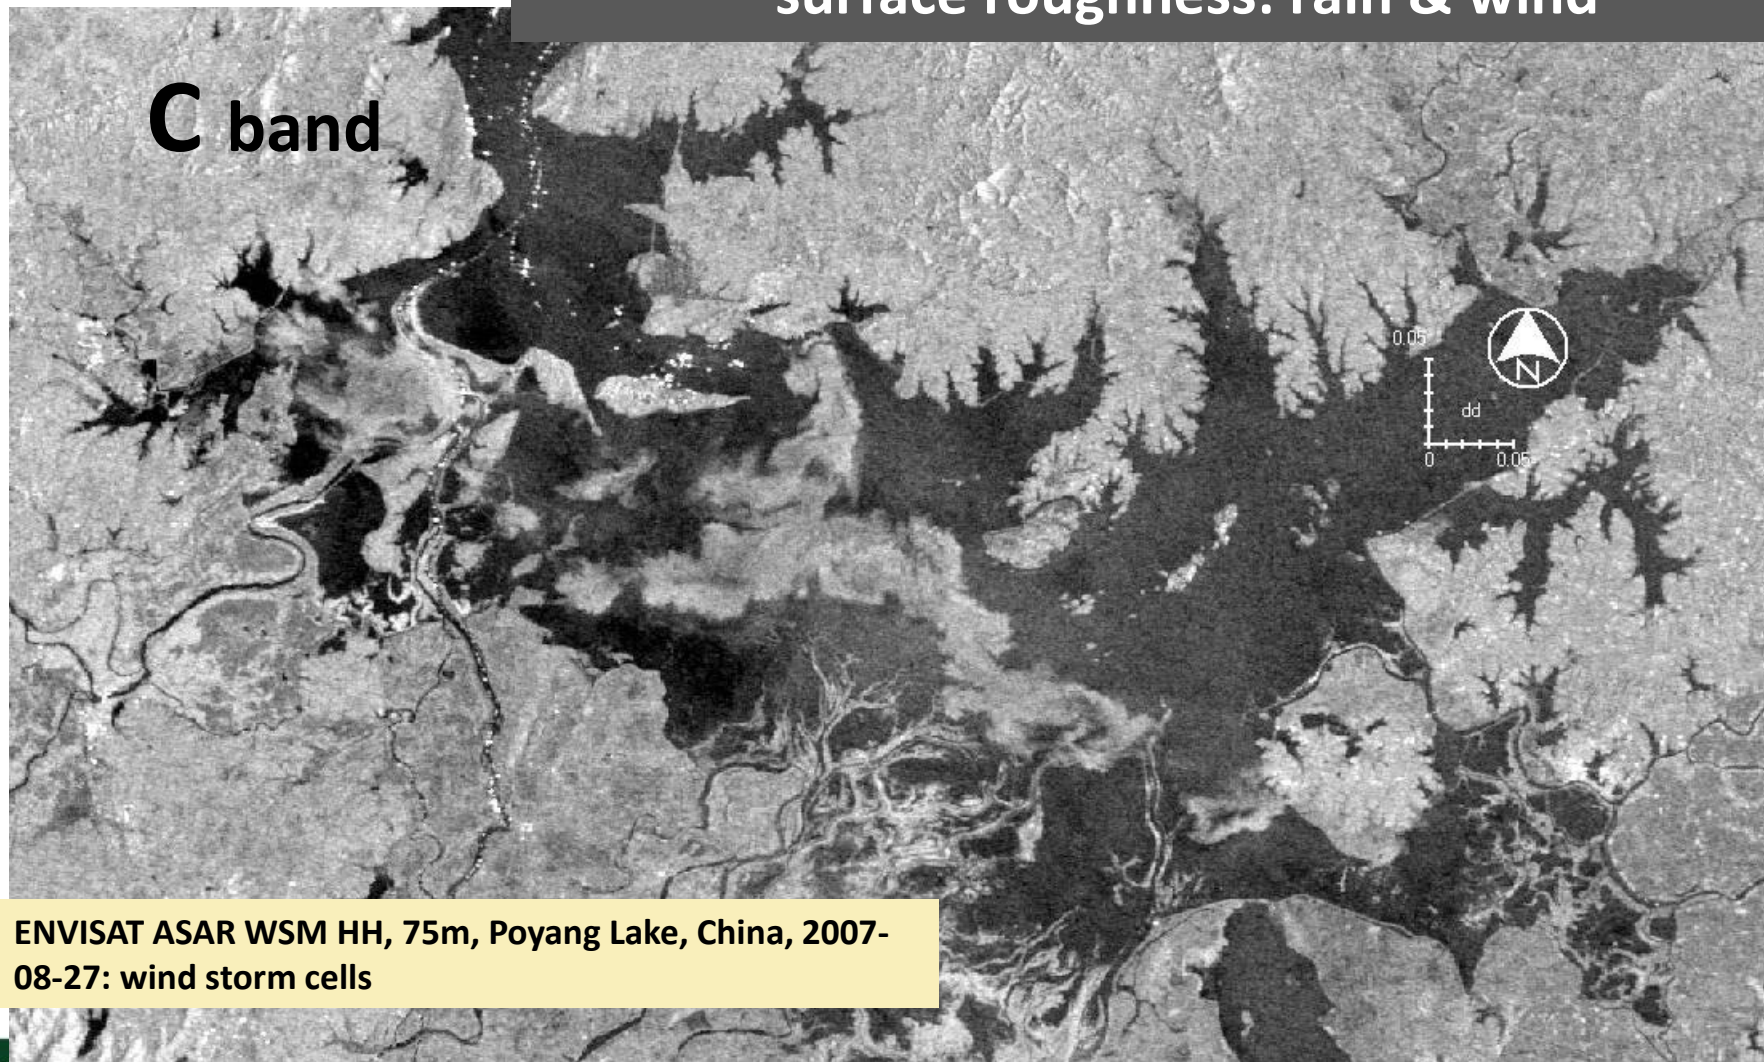


ENVISAT ASAR WSM HH, 75m, Poyang Lake, China, 2007-08-27: wind storm cells

Water backscattering in function of water surface roughness: rain & wind

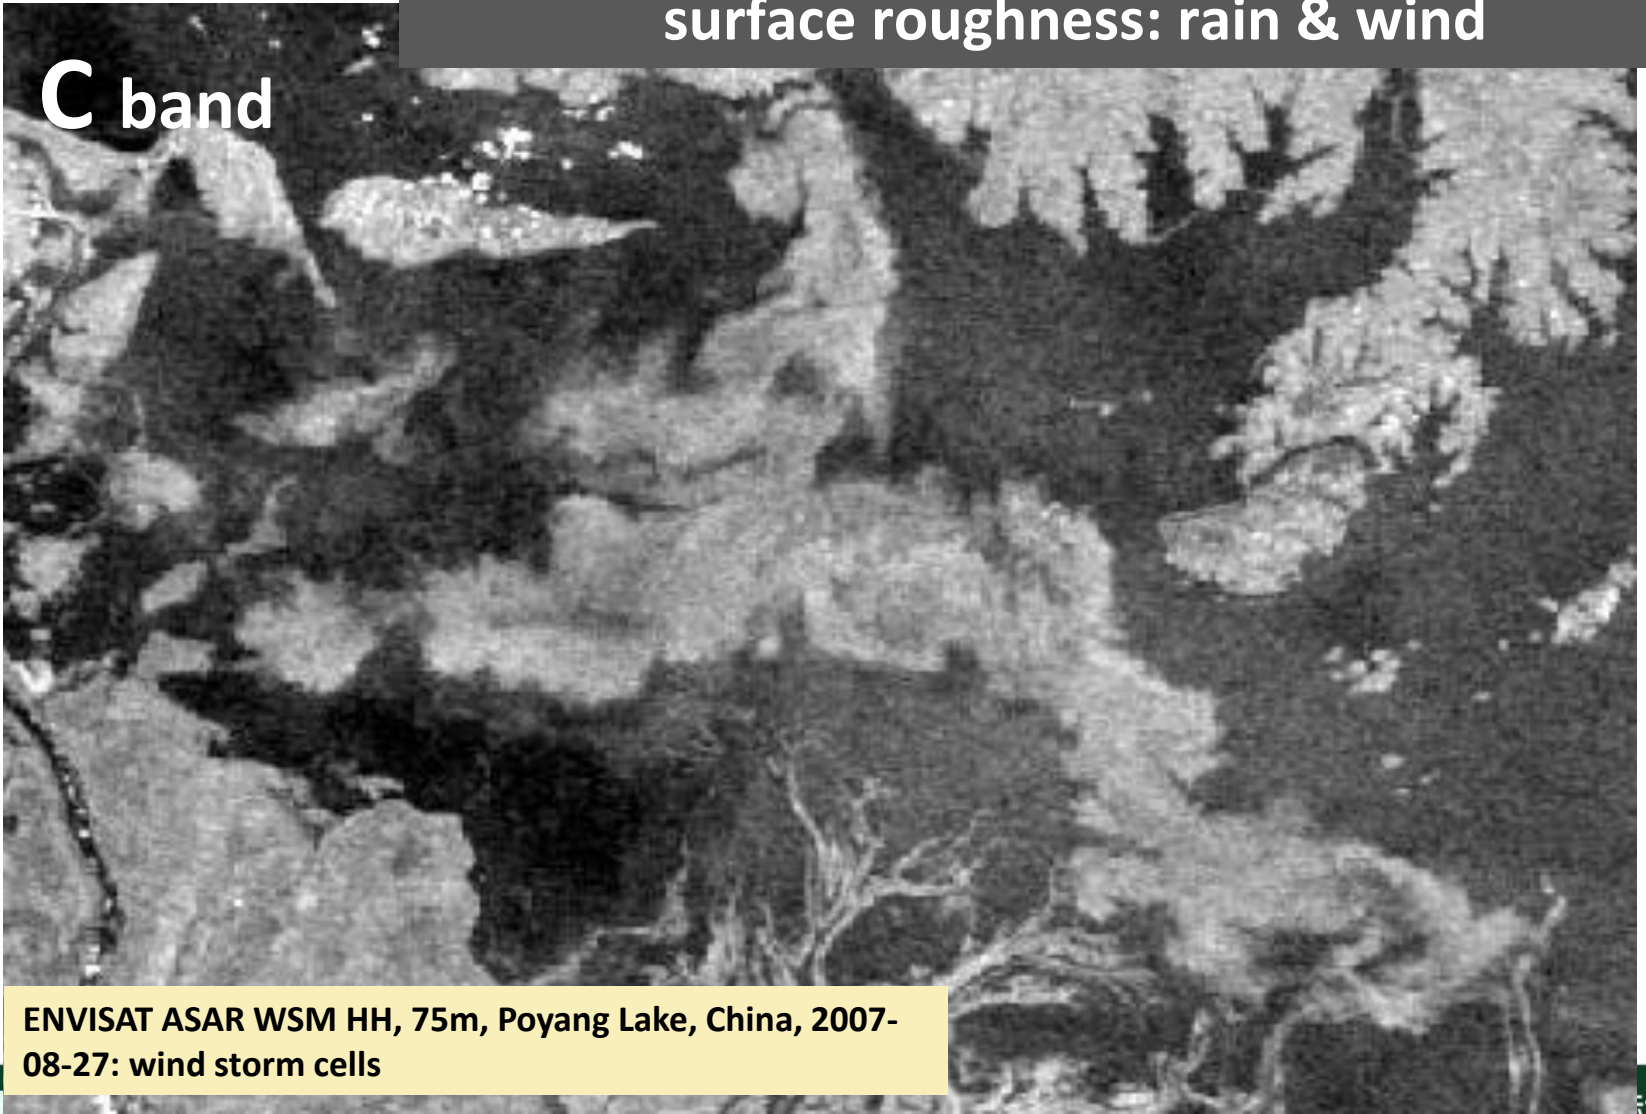

Water backscattering in function of water surface roughness: rain & wind

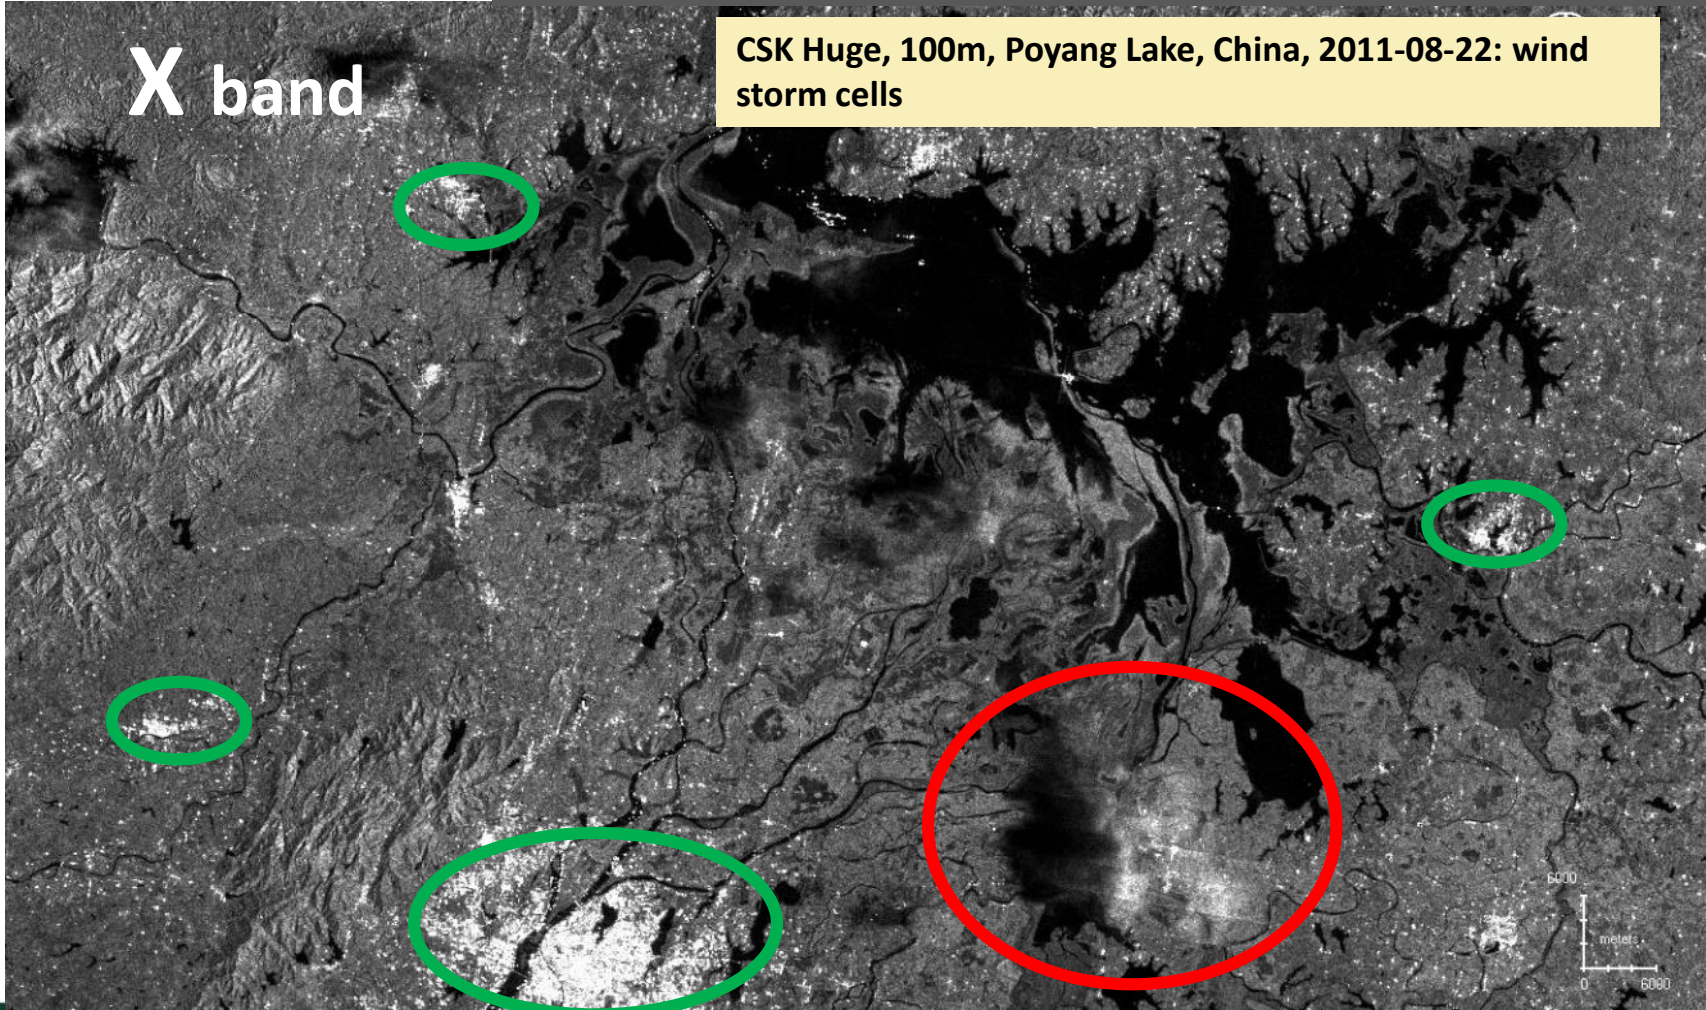


Water backscattering in function of water surface roughness: rain & wind

X band


CSK Huge, 100m, Poyang Lake, China, 2011-08-22: wind storm cells

Shadow effect

High Backscattering inside the cloud





Water backscattering in function of water surface roughness: rain & wind

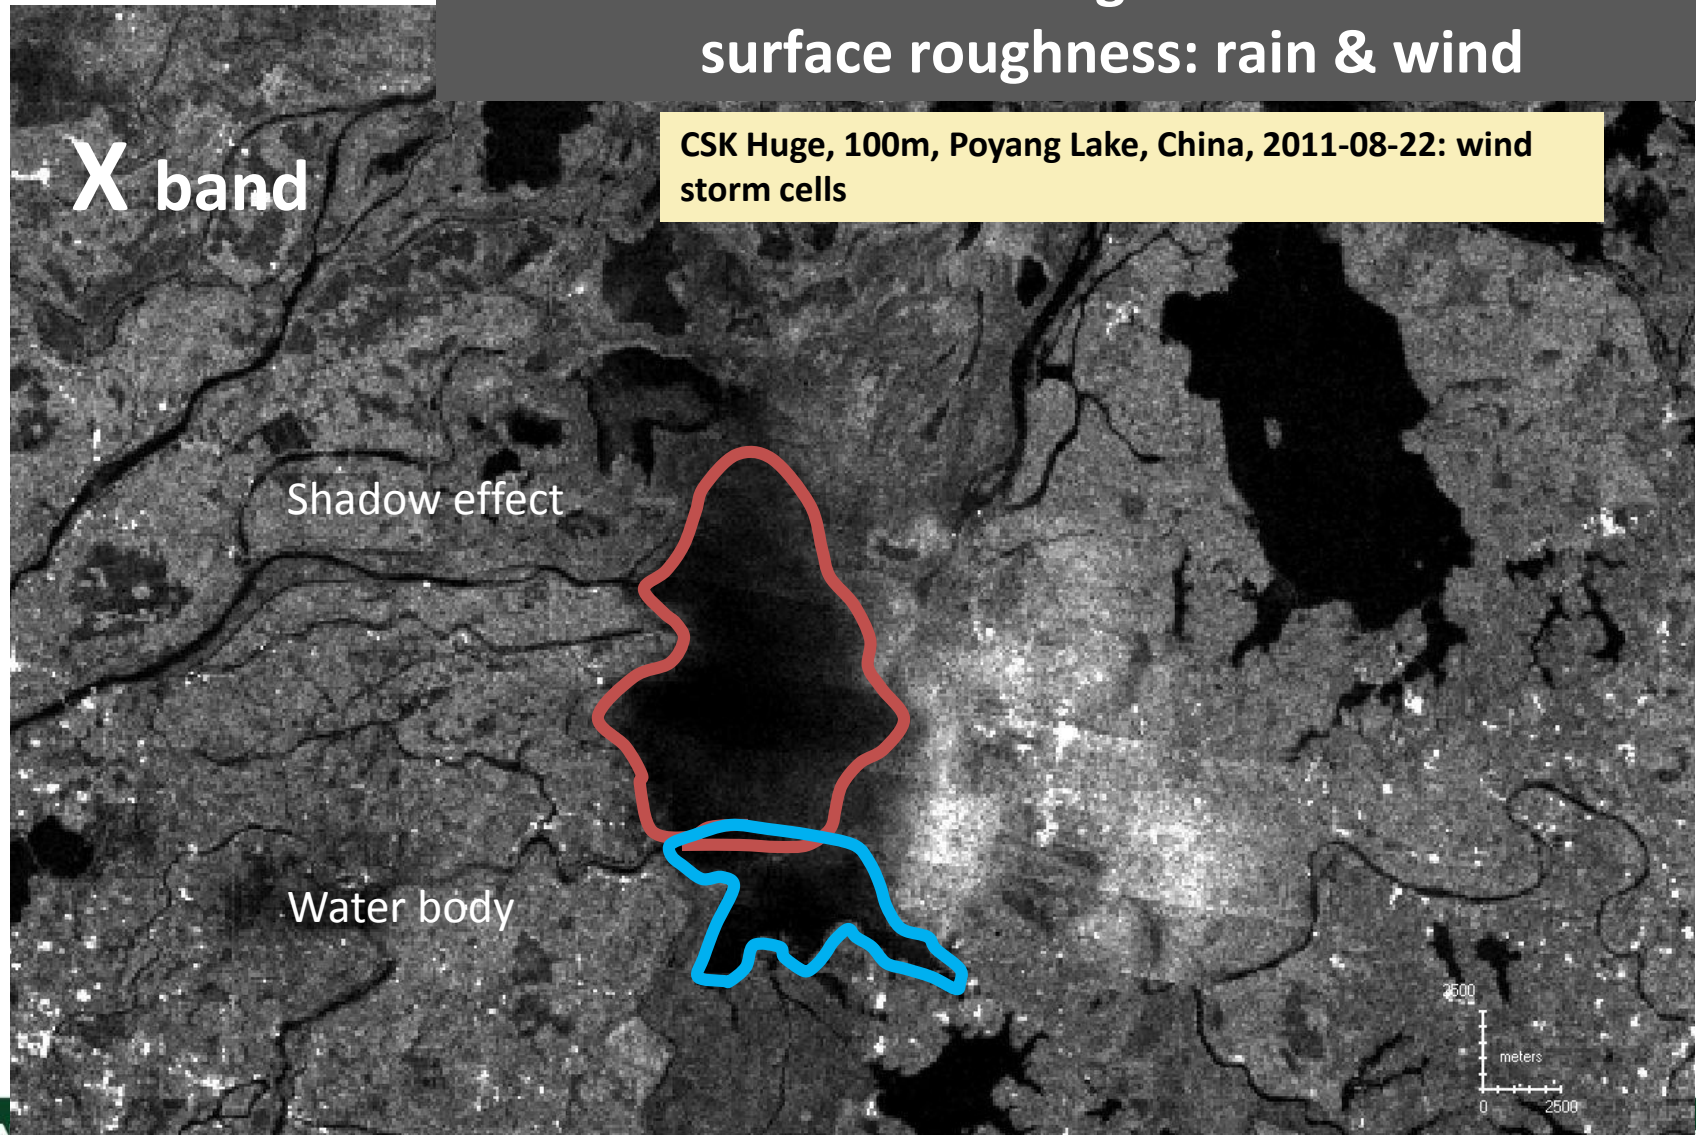

Water backscattering in function of cloud /precipitation : country with contrasted rainy/dry season

China: Poyang lake case

- 1 image ASAR ENVISAT en bande C, over more than 200 analyzed
- 1 image CSK Hubei, bande X, over 15 analyzed...

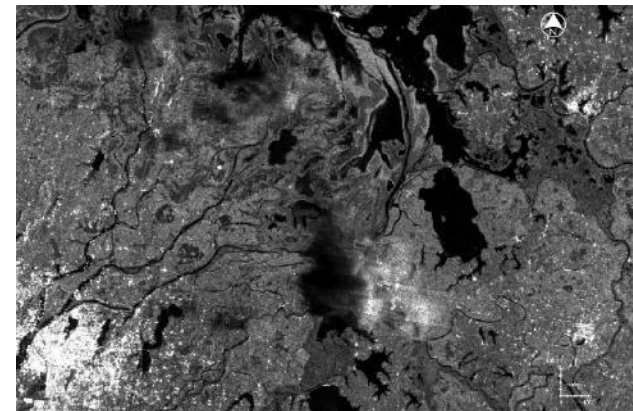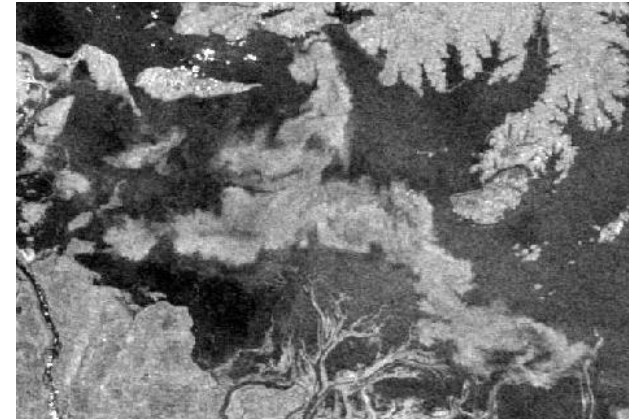


Water backscattering in function of cloud /precipitation : country with contrasted rainy/dry season

China: Poyang lake case

- 1 image ASAR ENVISAT en bande C, over more than 200 analyzed
- 1 image CSK Huge, bande X, over 15 analyzed...

Ivory coast

- 1 TerraSAR Stripmap, X band, over 5 analysed
- Attenuation due to the rain fall

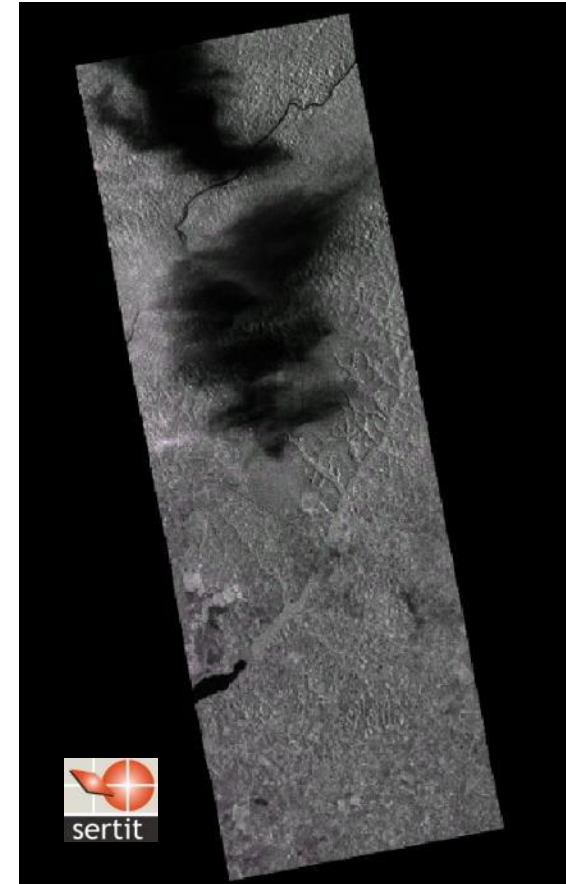

Water backscattering in function of cloud /precipitation : country with contrasted rainy/dry season

China: Poyang lake case


- 1 image ASAR ENVISAT en bande C, over more than 10 analyzed
- 1 image CSK Hubble, bande X, over 15 analyzed...

Ivory coast

1 TerraSAR Stripmap, X band, over 5 analysed..

Niger:

1 TerraSAR X ScanSAR, X band, over 3 analysed

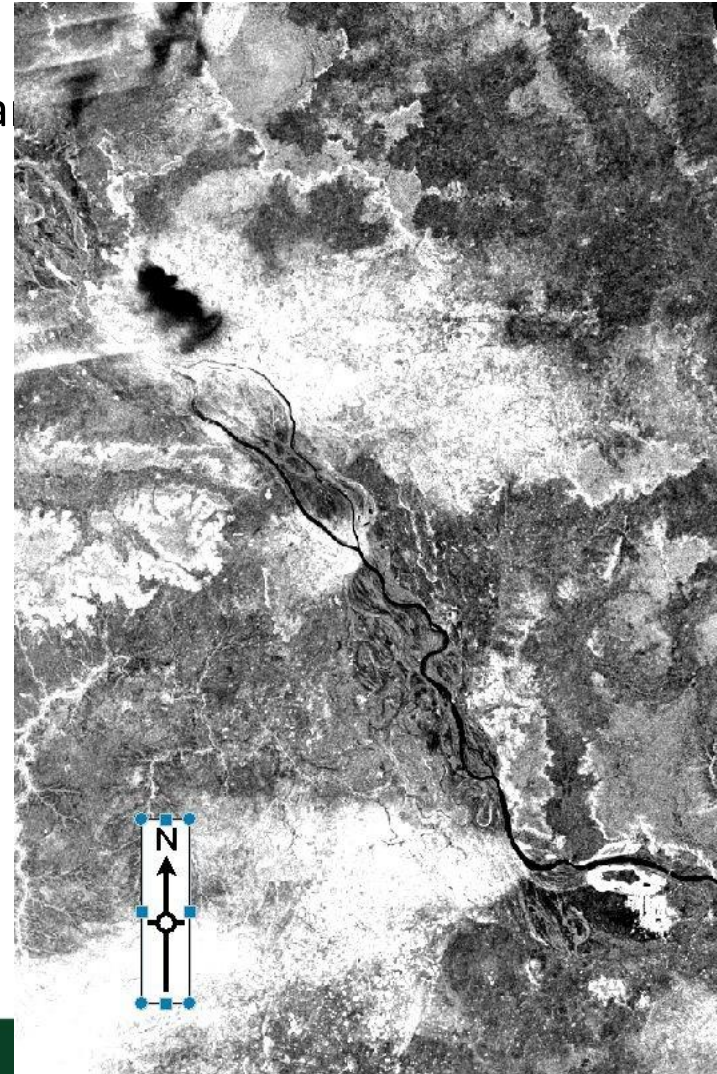

Water backscattering in function of cloud /precipitation : country with contrasted rainy/dry season

China: Poyang lake case

- 1 image ASAR ENVISAT en bande C, over more than 200 analyzed
- 1 image CSK Huge, bande X, over 15 analyzed...

Ivory coast

1 TerraSAR X Stripmap, X band, over 5 analysed..

Niger:

1 TerraSAR X ScanSAR, X band, over 3 analysed
Attenuation and huge backscattering

Myanmar

1 CSK, X band





Water backscattering in function of cloud /precipitation : country with contrasted rainy/dry season

Very high sensibility to rainfall and clous in X band

Be carefull!!

- backscattering and attenuation of radiation by hydrometeors in the rain cells;
- Backscattering of sea induced by the impact of raindrops and wind.

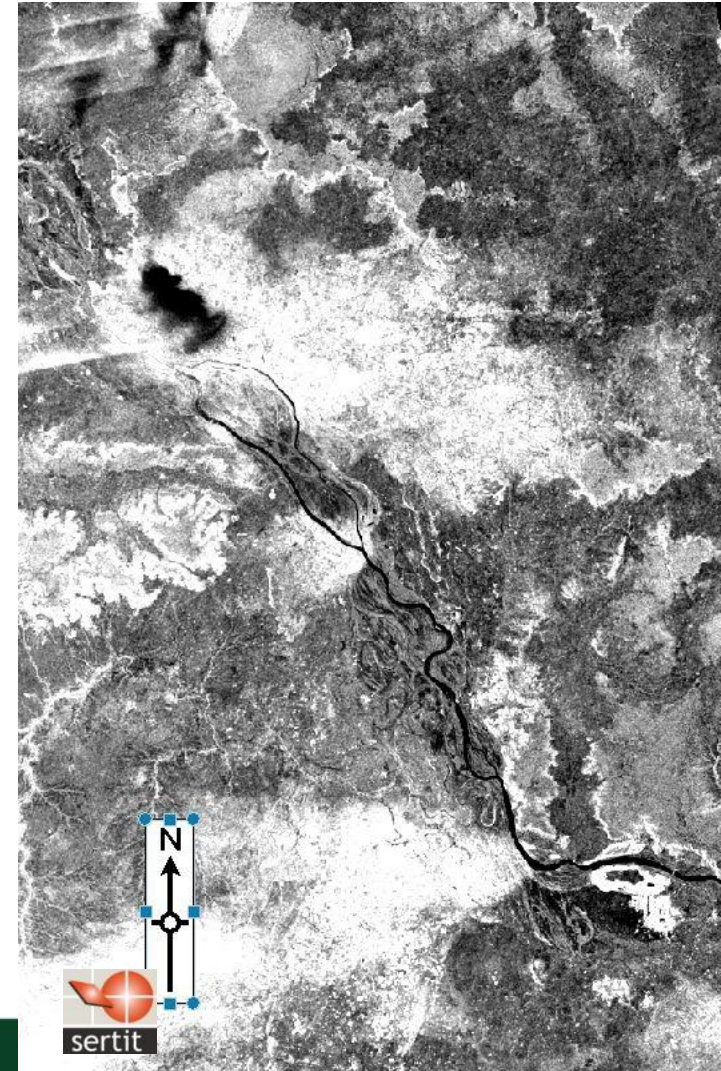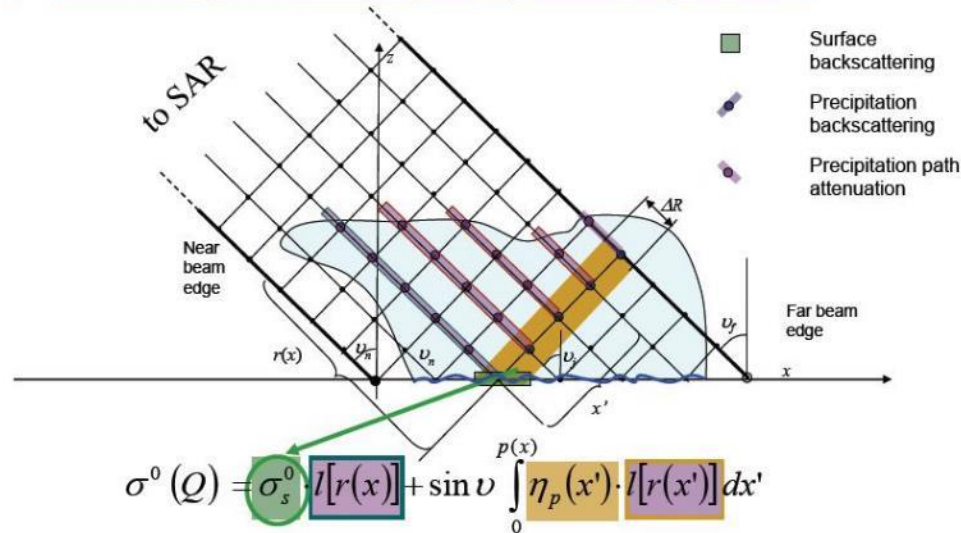

Bakdini et al., 2012, from Meteo Italy

Presentation outline

Introduction: Why water bodies and flood mapping and monitoring

Flood and lakes in the landscape

Short cut of Physical basis for Water bodies mapping

Elements for water bodies extraction based on SAR imagery

SAR sensors for water bodies and/or flood mapping


- **Past mission**
- **On going missions**
- **Future missions**

Flood plain and lakes monitoring

- **Short term Monitoring**
- **Long term monitoring**
- **Meteo climato parameters**

Concluding remarks


Former, actual and future SAR missions valuable for water surface mapping/monitoring

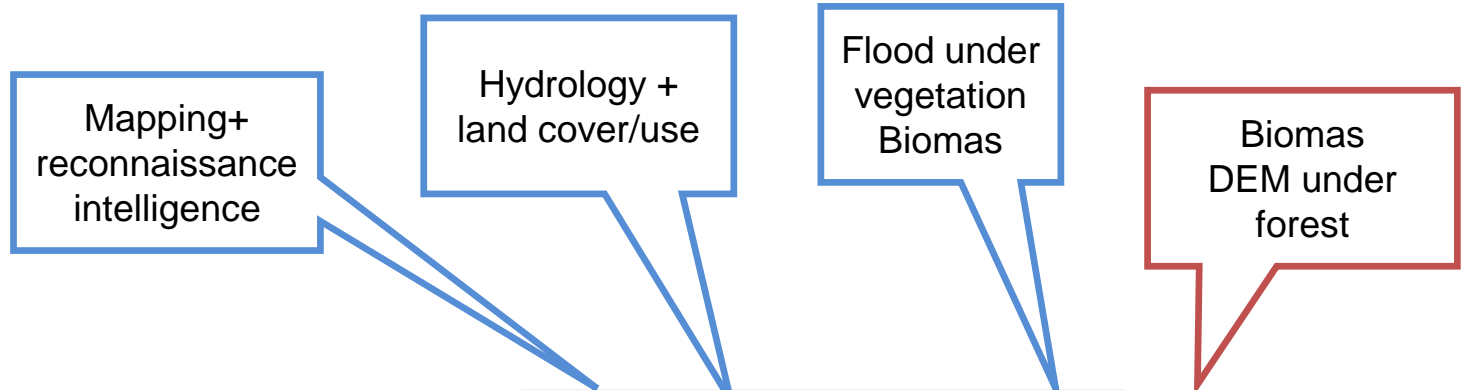

Bandes	Ka	K	Ku	X	C	S	L	P
Fréquence (GHz)	40-26.5	26.5-18	18-12.5	12.5-8	8-4	4-2	2-1	1-0.3
Longueur d'onde (cm)	0.75-1.1	1.1-1.67	1.67-2.4	2.4-3.75	3.75-7.5	7.5-15	15-30	30-100
Polarisation	HH, VV, HV, VH							

Images acquired in X, C, S, L Bands are potentially suitable for water bodies mapping

Former, actual and future SAR missions




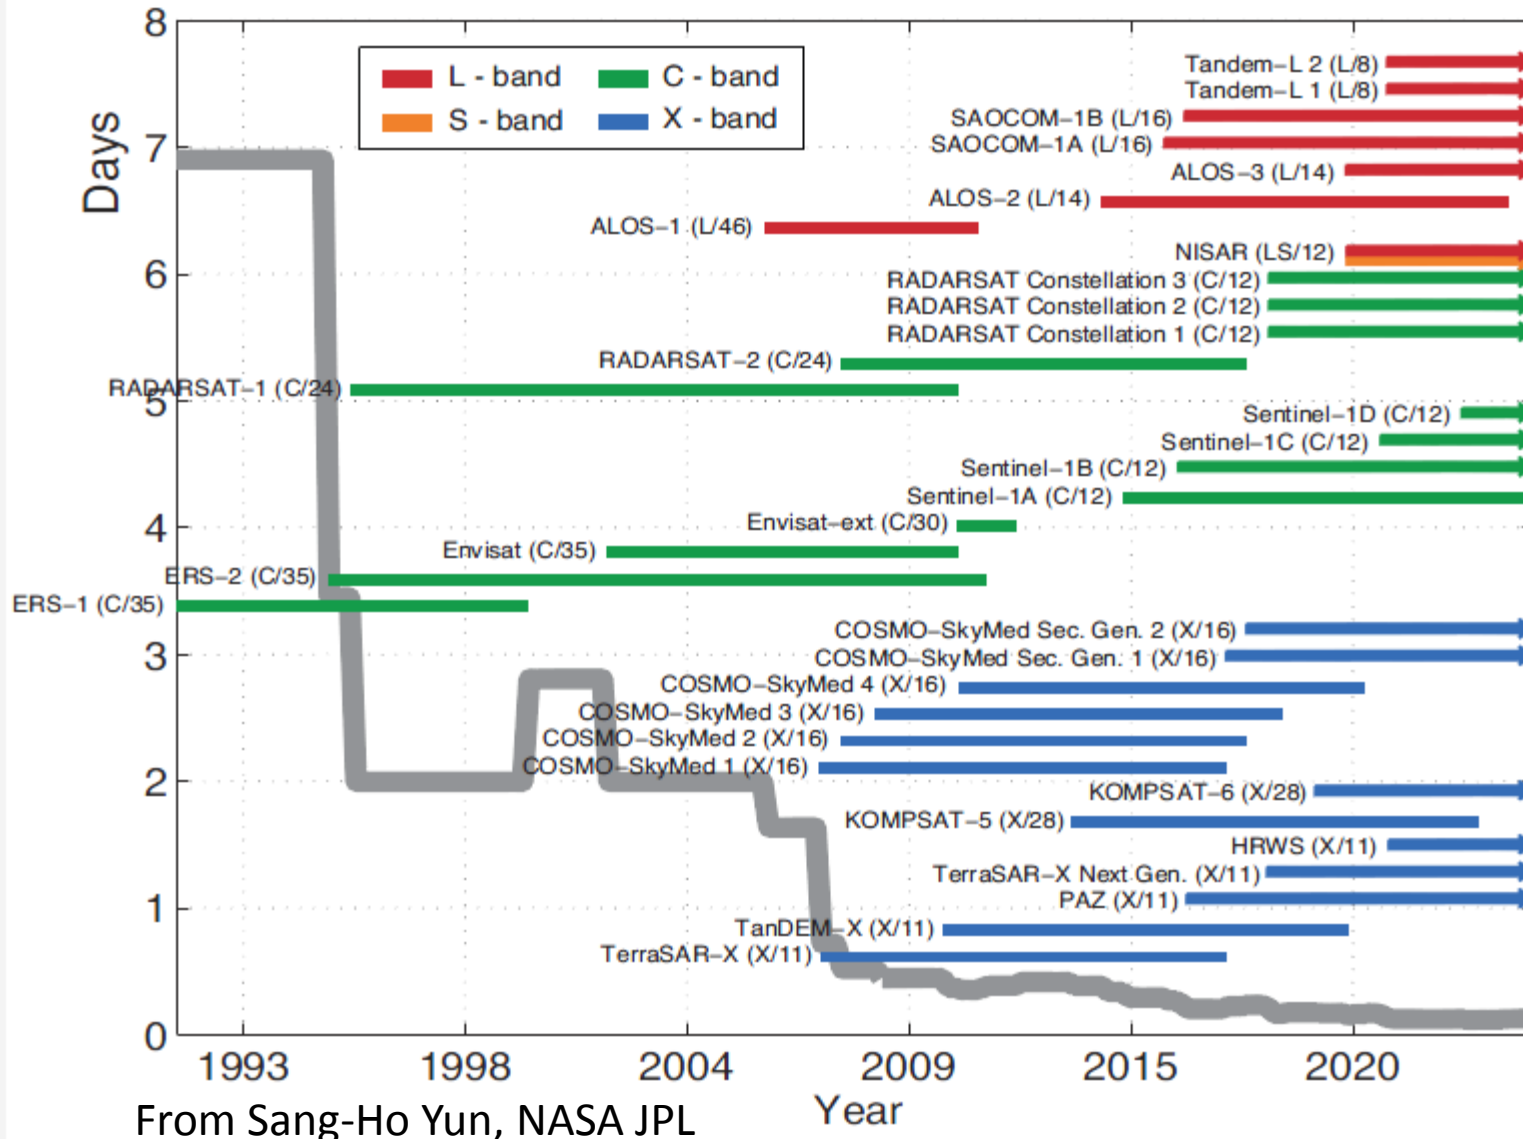


Former & old missions: precursors and rich archive

- **1978** : First civilian SAR, SEASAT (USA).; 108 days
- **1981** : SIR A Mission, on board on US Shuttle , band L
- **1984** : SIR-B, Mission, on board on the US Shuttle, Band L, 5 - 13 October 1984

- **1991** : ERS-1 , ESA , launch 17 of July 1991 and ended in march 2000
- **1992** : J-ERS , Japan
- **1994** : SIRC X SAR, two shuttle's missions (10 days: 9-04 - 20-04- 1994 and 30-09 - 11-10-1994. Bande L, C et X
- **1995** : ERS-2 , in tandem with ERS1 , ended in September 2011 (16 years of operation)
- **1995** : RADARSAT 1, Canadian Space Agency
- **2000** : Mission SRTM, topographic mission on the shuttle , 11-22 February 2000
- **2002** : Envisat, European Space Agency ended 12 of May 2012
- **2006** : PALSAR's L-band SAR, on ALOS mission (ended in 2011)

Importance of the Archive: Flood memory Radarsat over 1998 Yangtze historical flood

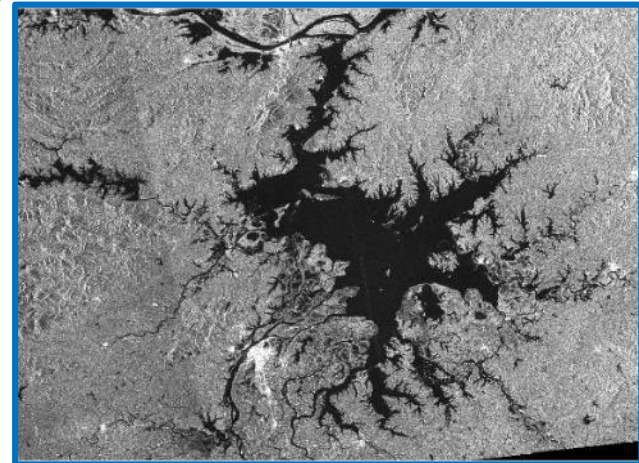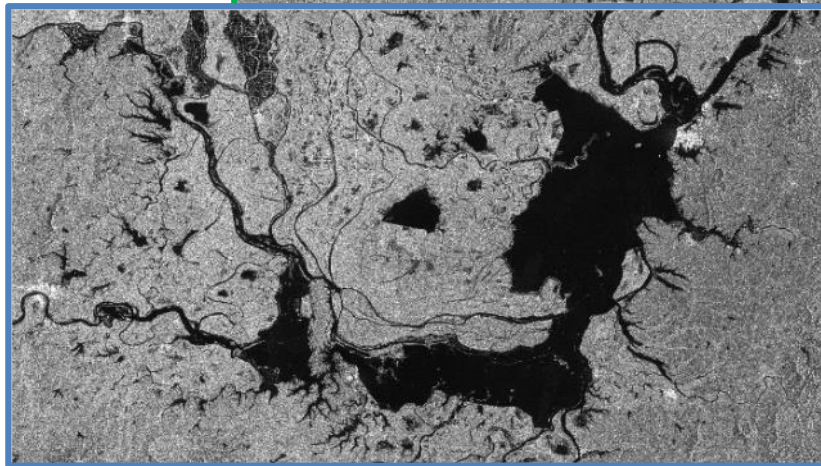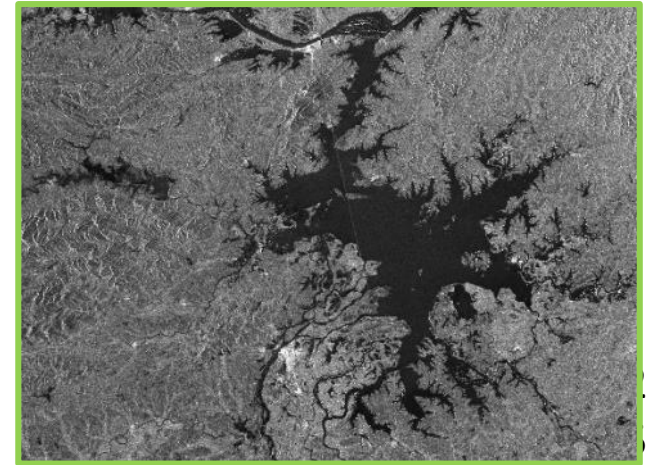
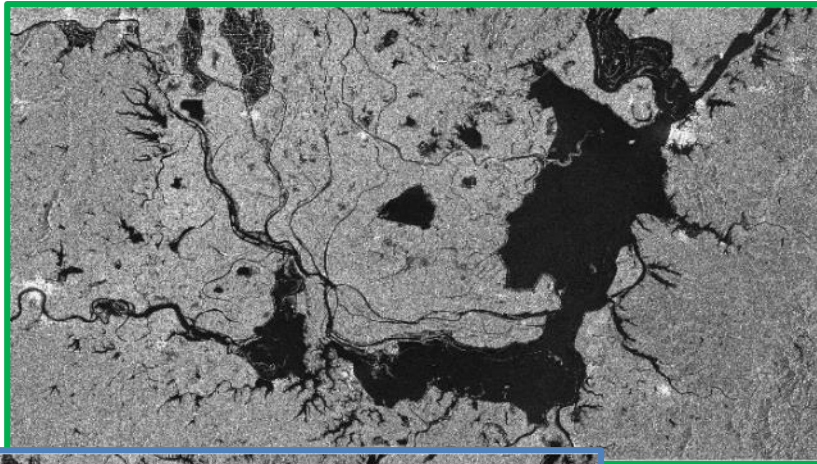


07-10
07-31
08-04
08-28
08-31

07-31
08-04
08-07
08-14
08-17
08-31



Dongting 1998: SCN, SCW, SGF


Poyang 1998: SGF, SCW,

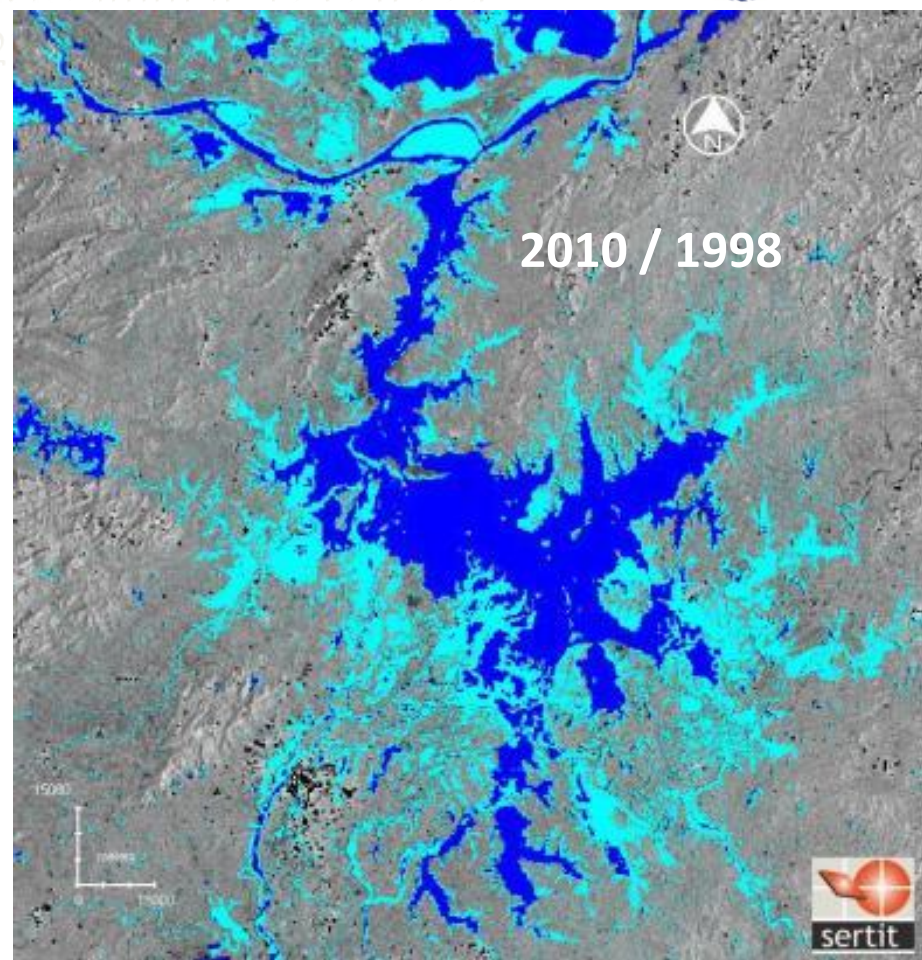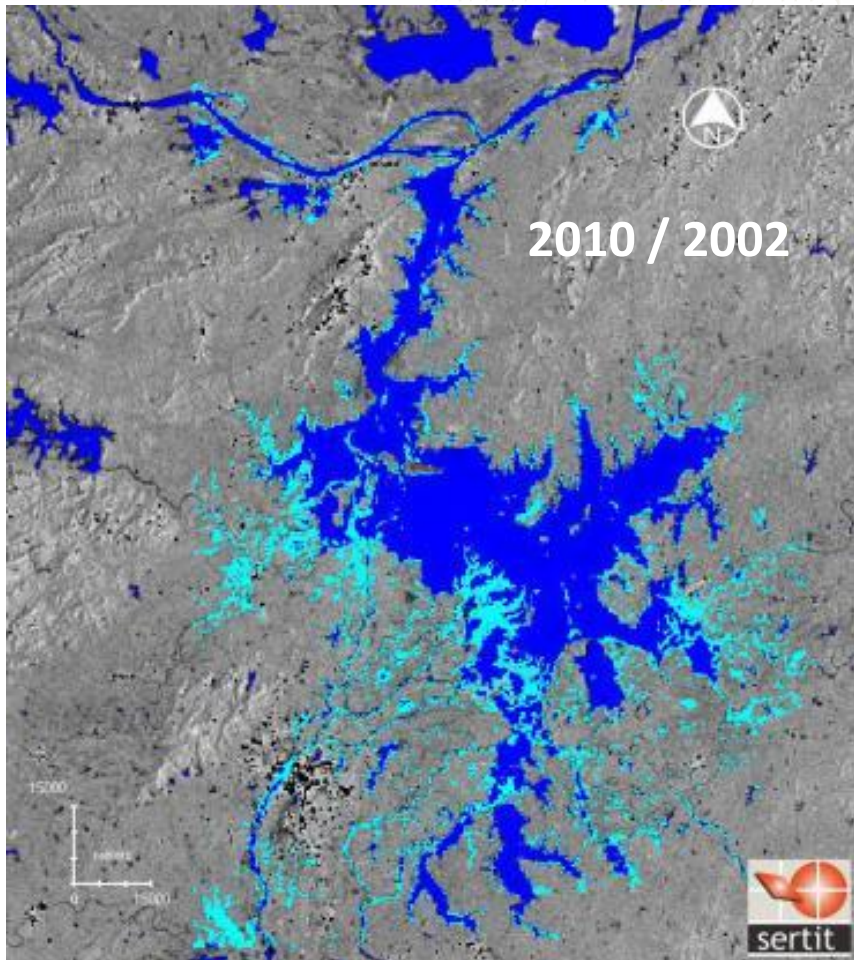

2010 flood event is an important one in Poyang last decade history
2010 extent (3354 km²) no far to the 2002 extent (3392 km²)
2010 much smaller in term of extent than 1998 (4116 km²)

Seasat: L Band

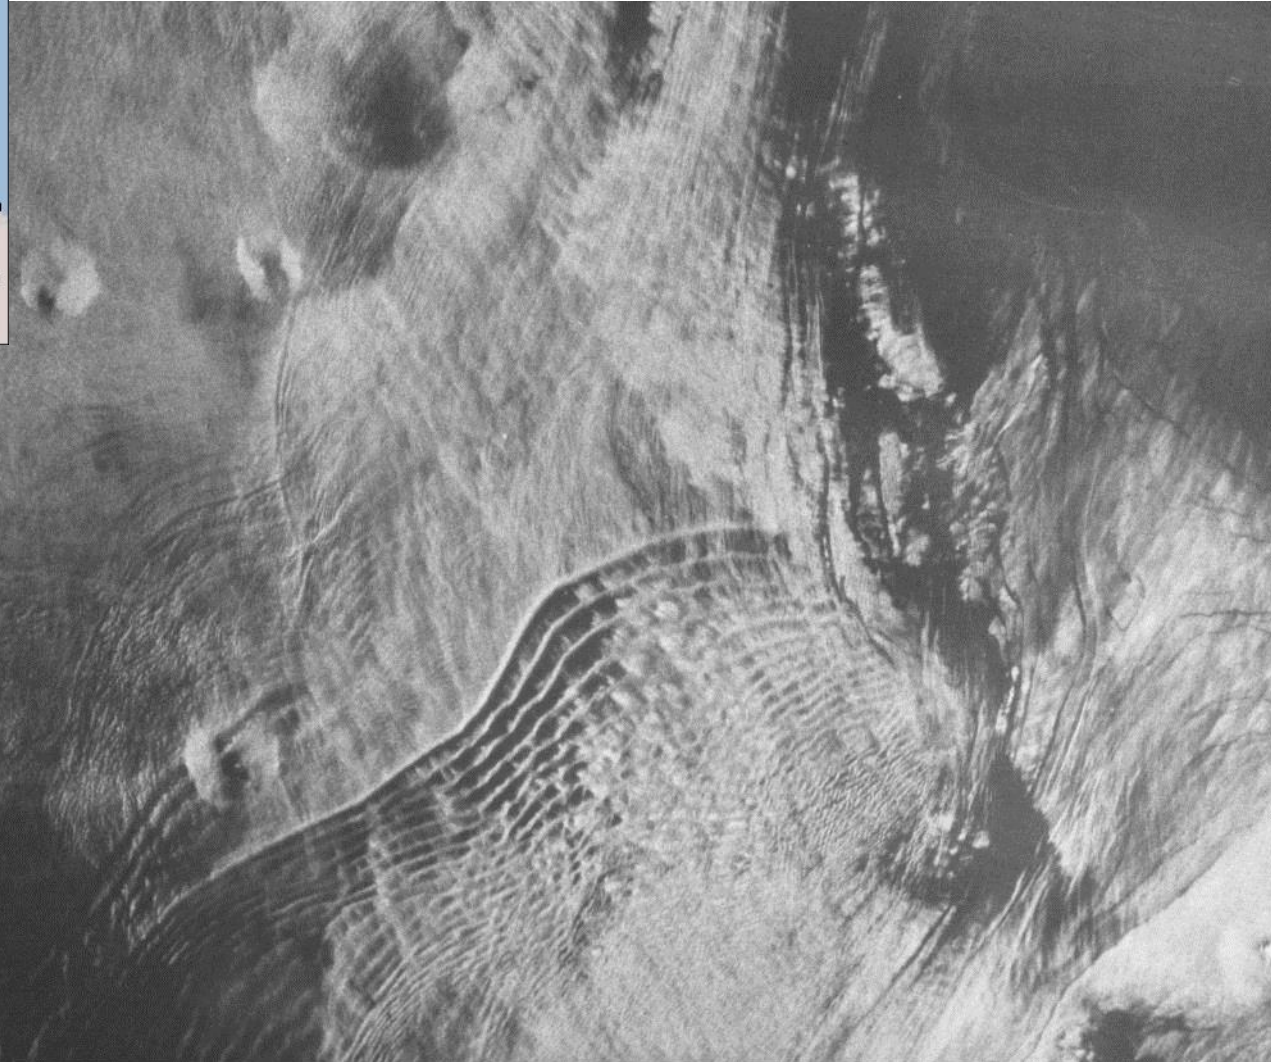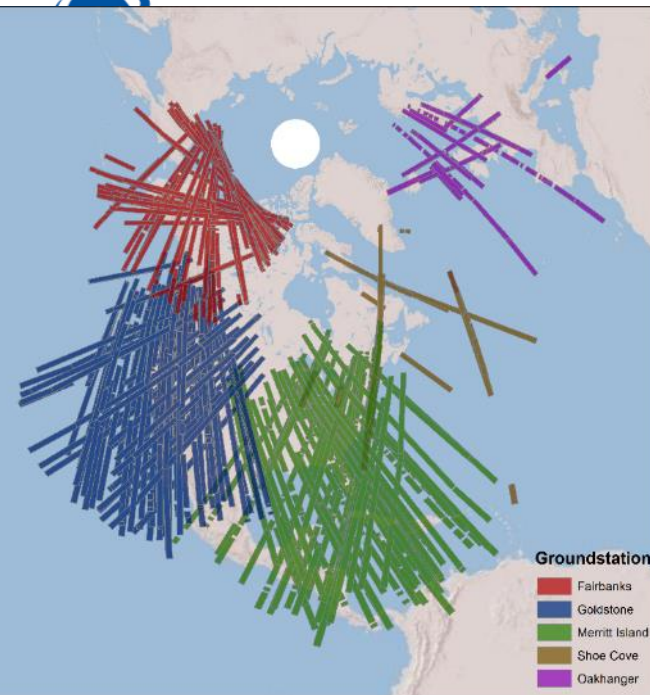



Brittany
West part of France

1978-08-20



ERS 1 - 2


ERS 1 launch, 1991, 17 of July
ERS 2 in 1995, 21 of April

C Band, VV

Cycle: 35 days

Cycle: 3 days

Cycle: 265 days, Geoid & bathymetry

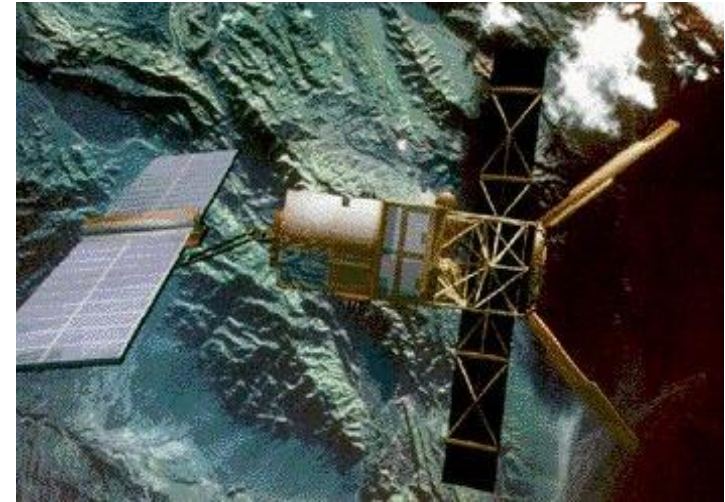


Operational mode	Band	Center frequency	Polarization	Incidence angle	Spatial resolution	Swath width
SAR Imaging mode	C-band	5.3 GHz	LV (linear vertical)	23° at mid-swath	10-30 m	100 km
SAR Wave	C-band	5.3 GHz	LV	23° +0.5°	30 m	5 km x 5 km
AMI-SCAT (wind)	C-band	5.3 GHz	LV	Fore/aft: 25°-29° Mid: 18°-47°	50 km	500 km

ERS 1 - 2

ERS SAR data have been wordily exploited for flood mapping


(cf numerous papers on ESA conferences)

- Thames flood 1992
 - Camargue flood in 1993
 - Meuse flood 1993-1994
 - Aude flood 1996
 - Oder flood in 1997
 - Chinese flood in 1998
 - and many more...
- Exploiting mostly the Amplitude

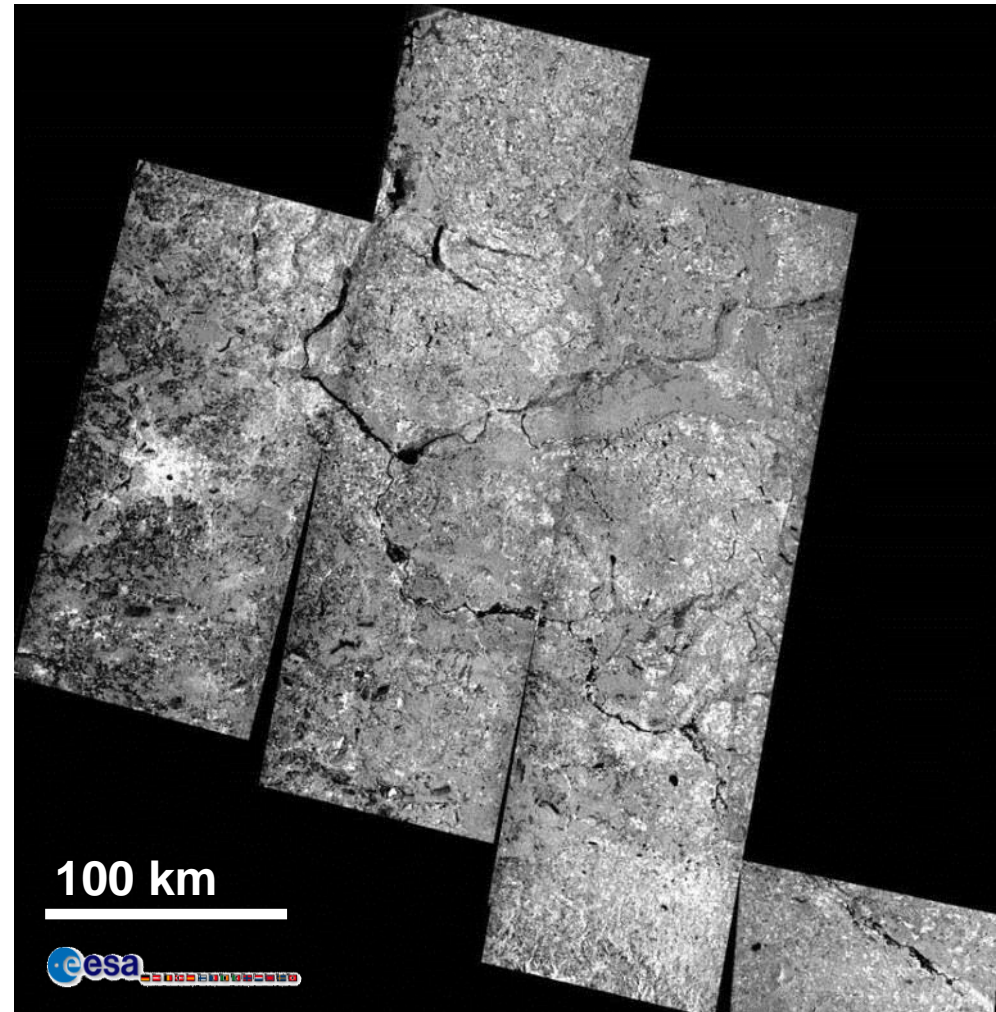


Flood mapping based on ERS 1 - 2

Camargue flood event: November 1993

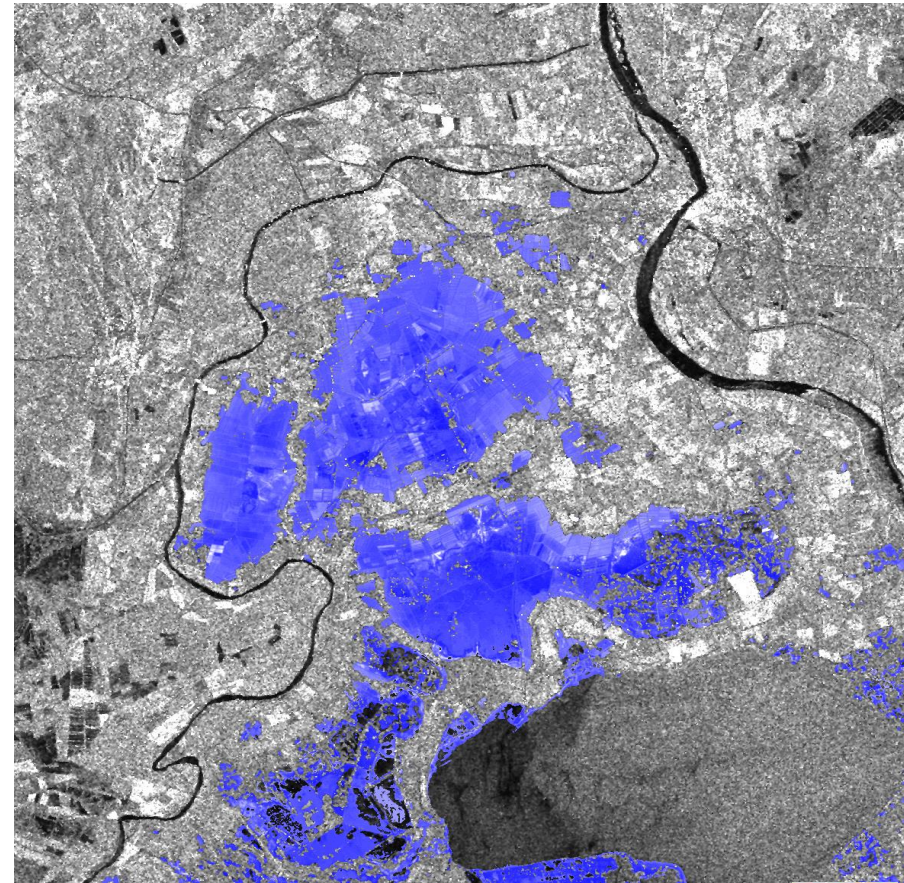

Flood mapping based on ERS 1 - 2

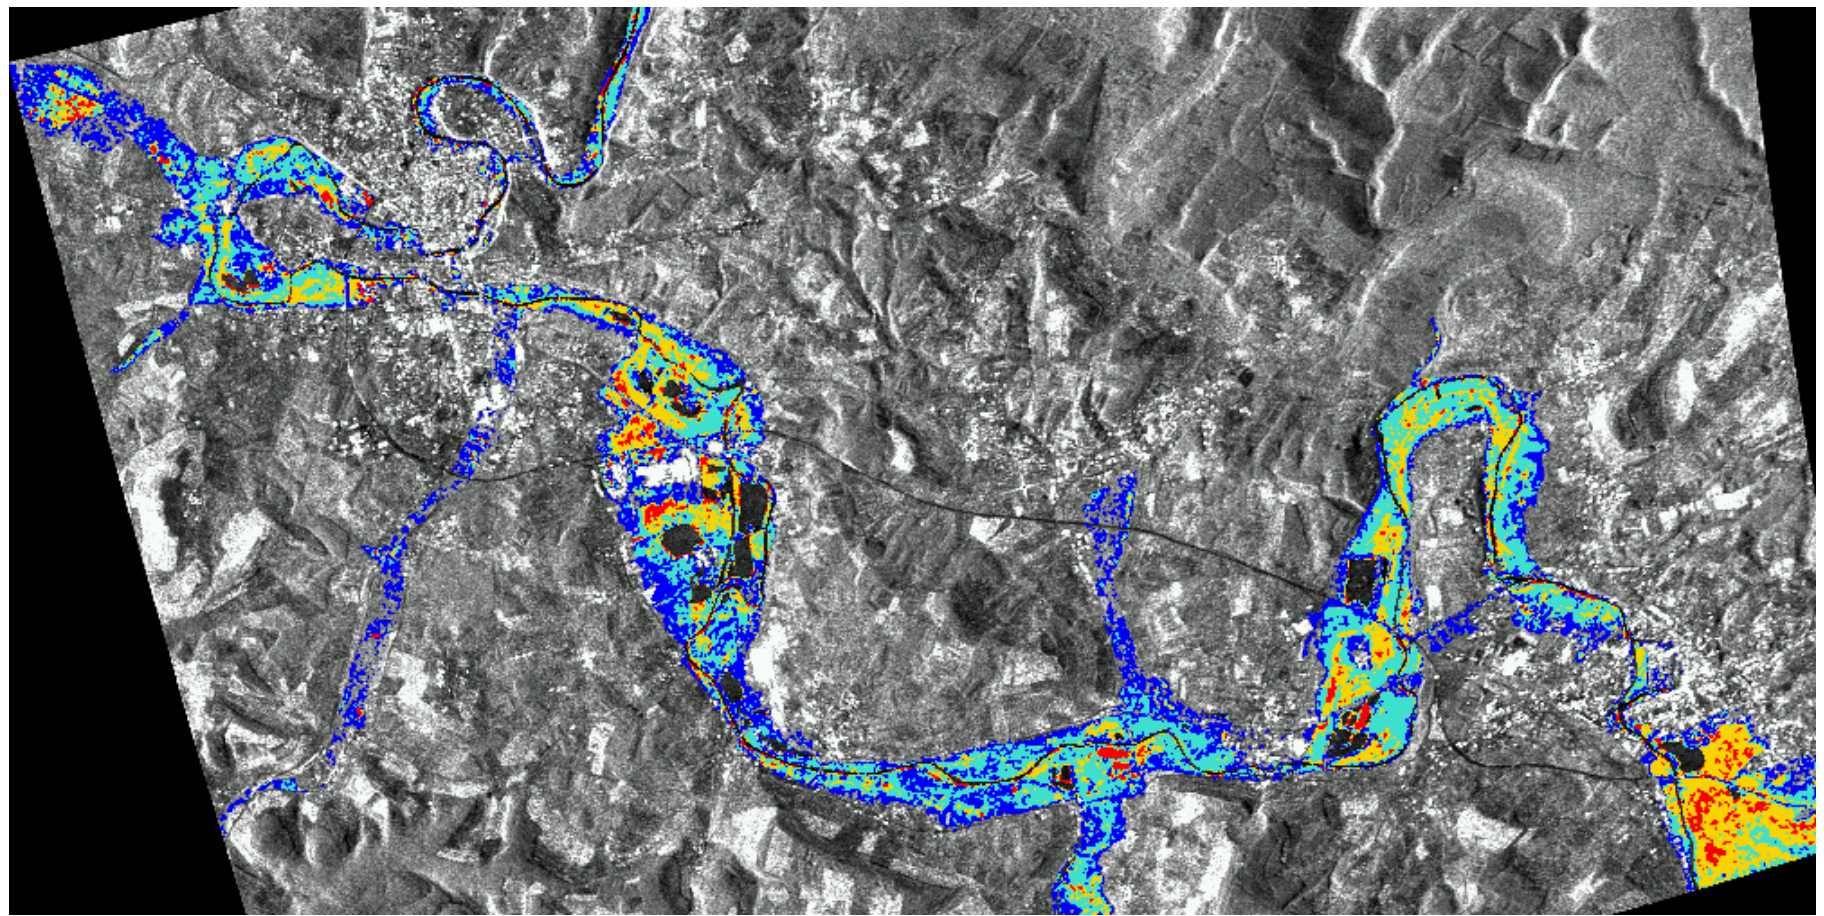

ERS: experimental 3 days mode from winter 93 to spring 94
Map of water permanency during the Meuse flood draw off in spring 1994
(Yésou et Chastanet, 2000)

Few examples of Coherence exploitation

Aude 96 flood event

ERS-2: 7 8 1995
ERS-2: 29 01 1996
ERS-1: 28 01 1996


Acquisition near the maximum of the flood

2 consecutives images

Exploitation of the phase information: lost of coherence on water surface


(Marinelli et al., 97 ; Nico et al., 2000 ; Sarti, 2004)

Flood mapping based on ERS 1 - 2 INSAR

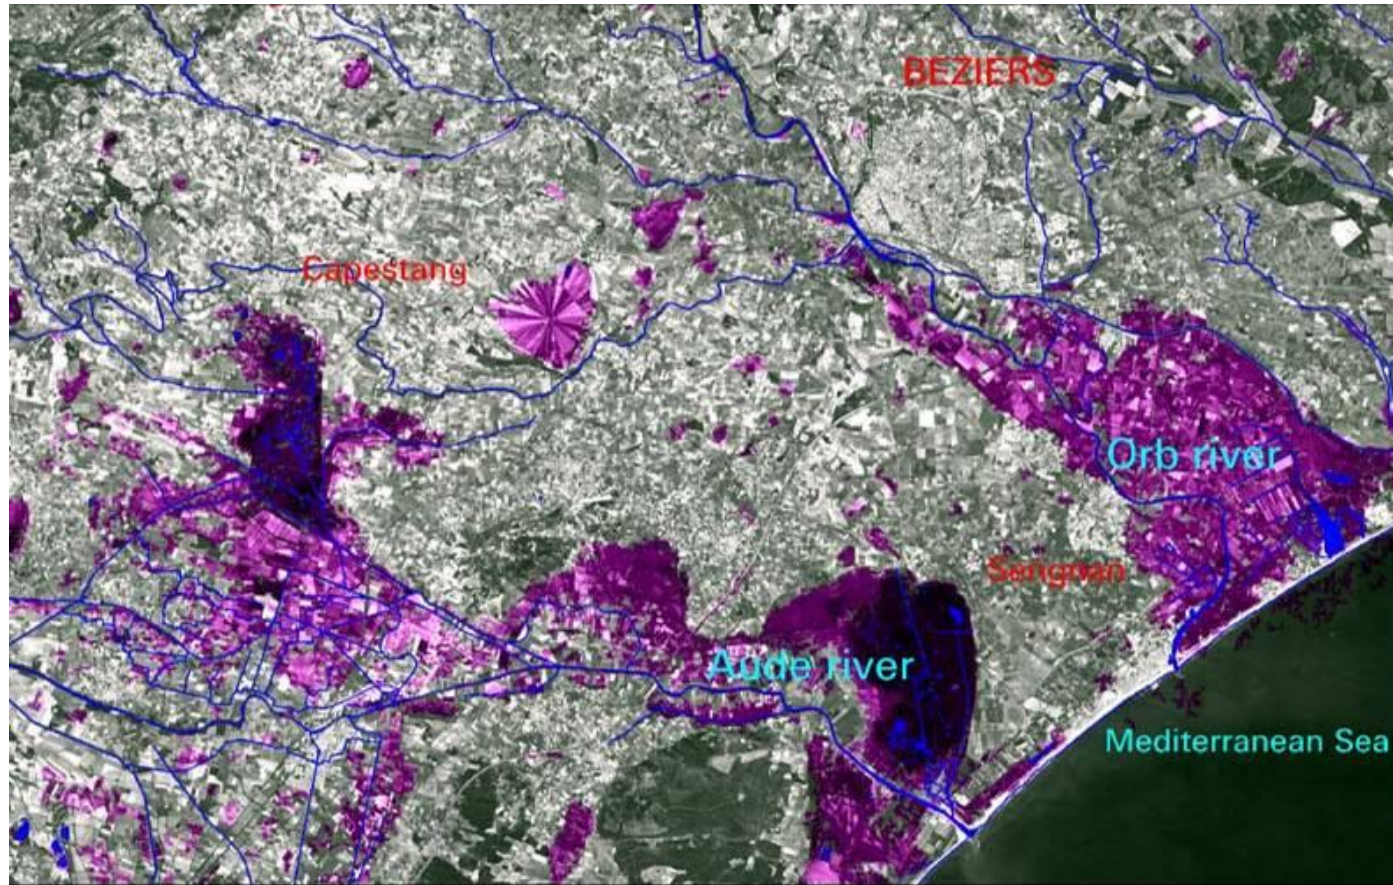

(© CEMAGREF 1996 , © ESA, 1996)

Last flood mapping based on ERS 2

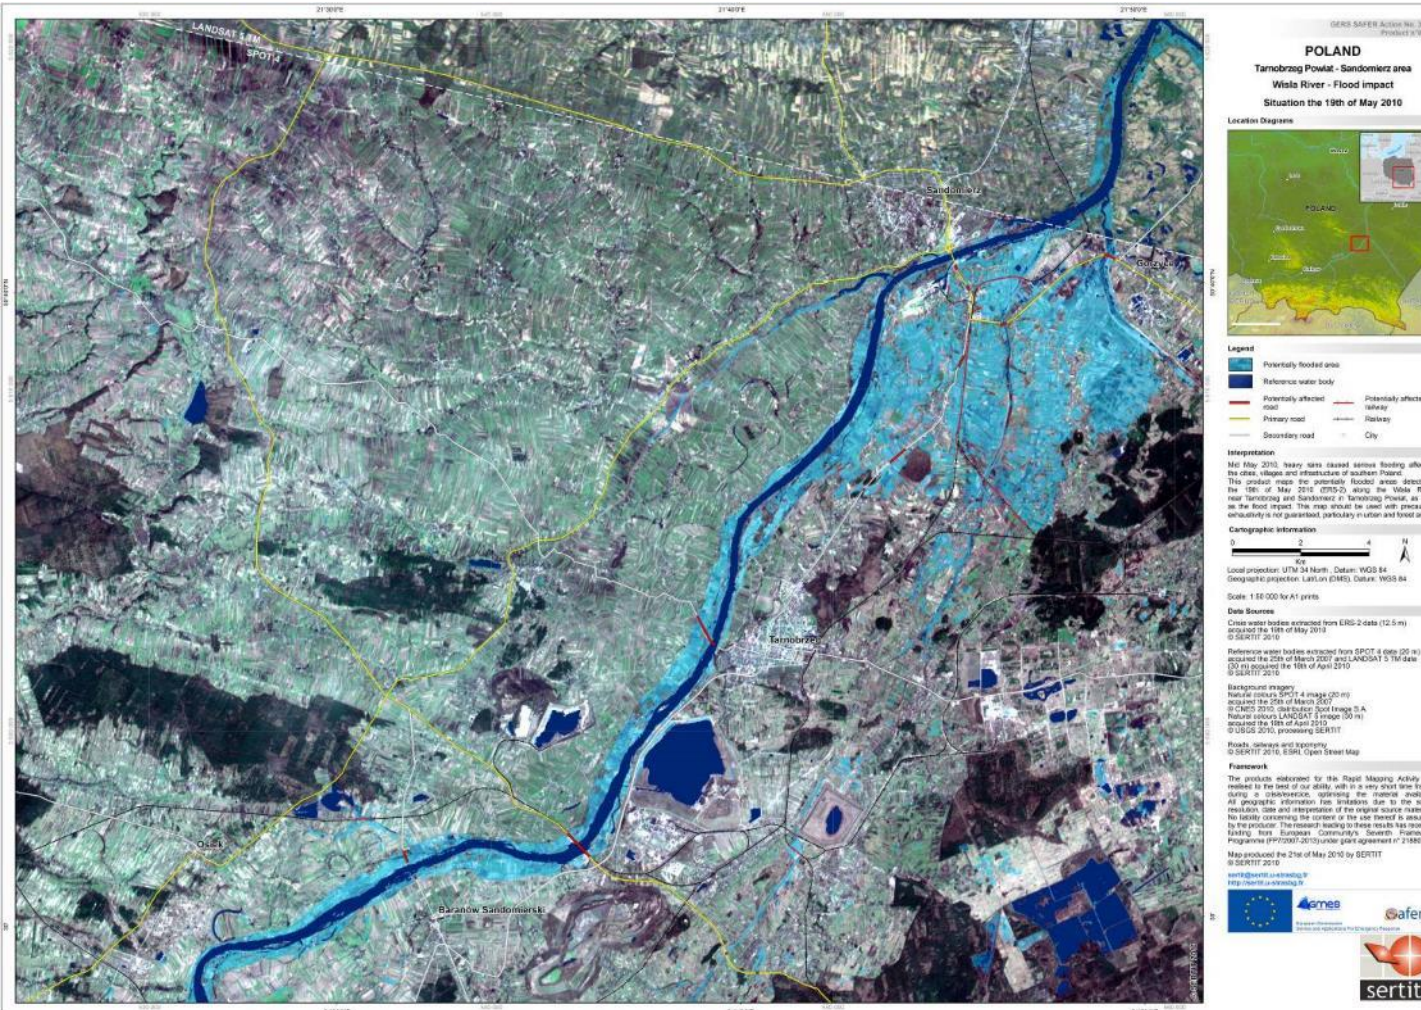

Thanks to ERS2 availability

1st image acquired

1st product generated over Poland Spring 2010 Flood

19 May 2010

ASAR ENVISAT: flood mapping



ENVISAT water recognition potential


DRAGON ESA MOST

APP image

Stripe of two images

HH-HV (diff HH-HV)

20-02-05

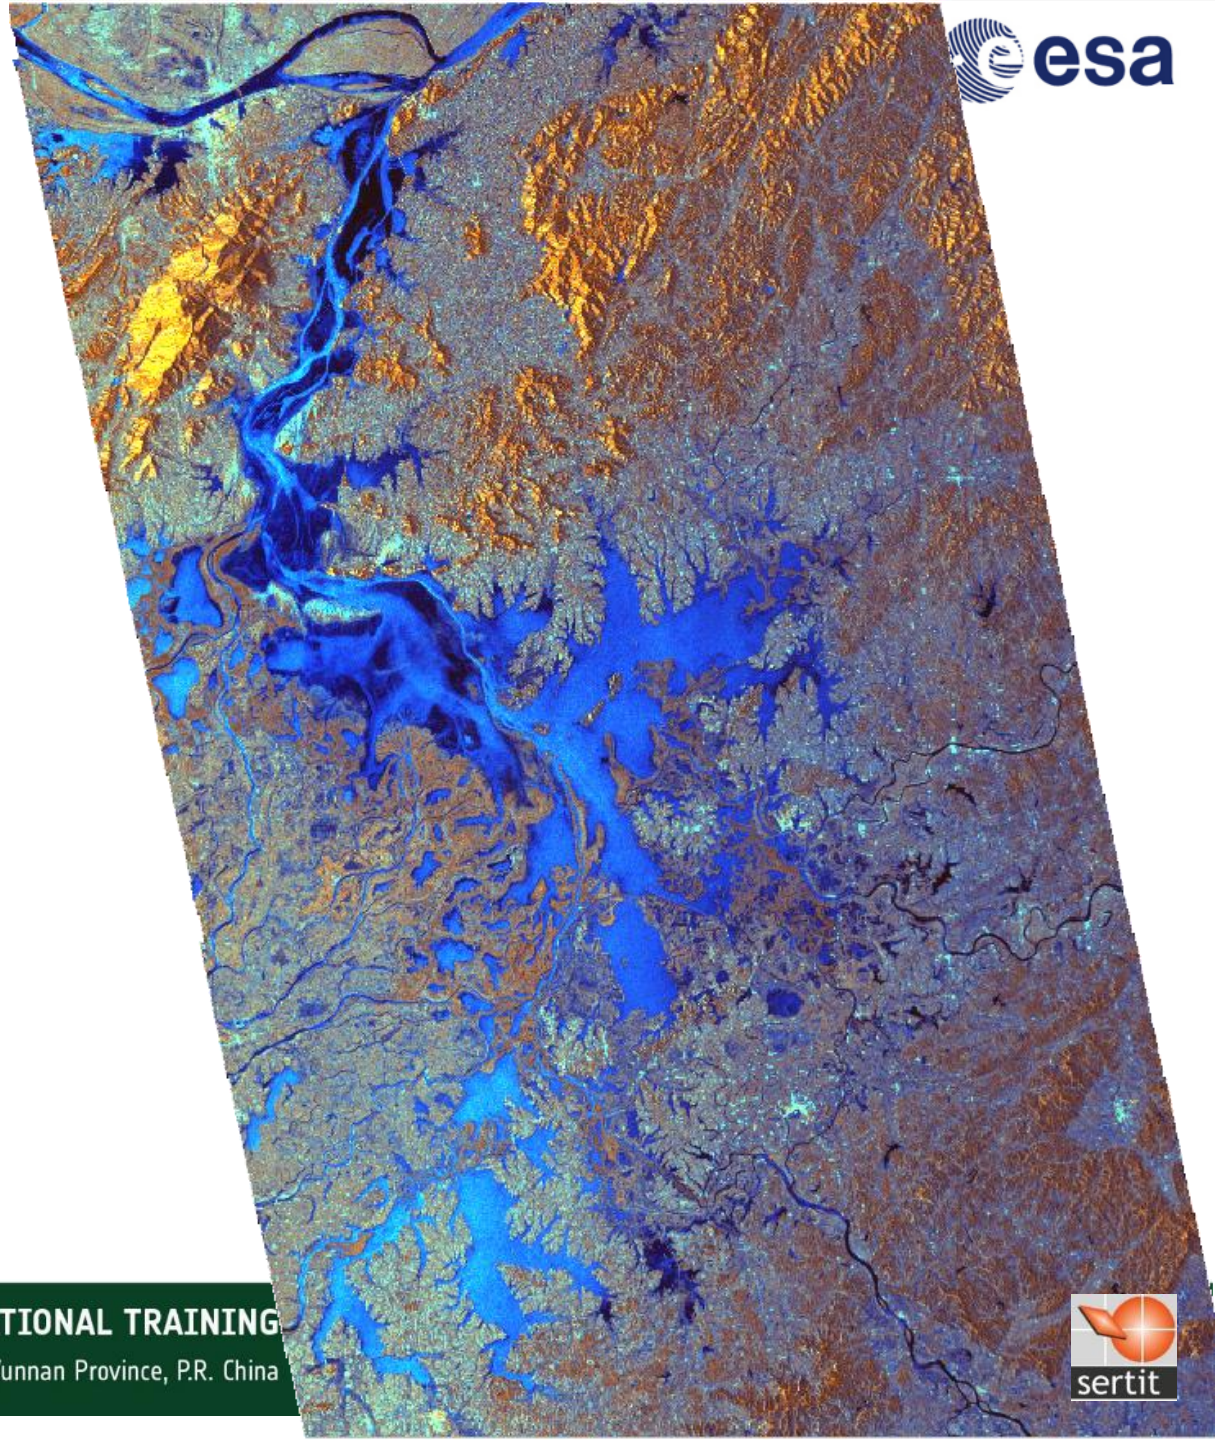

ASAR ENVISAT good successor of ERS with improvements:

1 – Better water recognition potential

- most of case HH mode >> HH-HV >>>> VV
- particular case of S1 : HV >> HH >>>> VV


2- Better revisit thanks to:

- Multi beams
- Wide Swath mode


3 – Flooded low vegetation recognition

See for example Ferrazzoli P., Karszenbaum H., Grings F.

Also in some favourable cases, possibility of identification of flooded forest thanks to double-bounce phenomenon

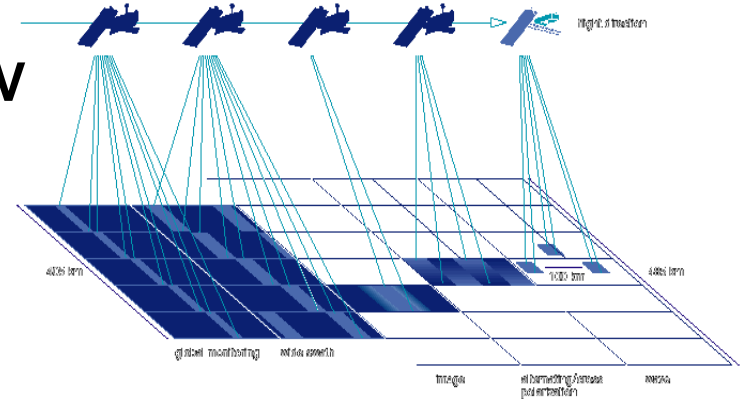


ENVISAT: flood rapid mapping

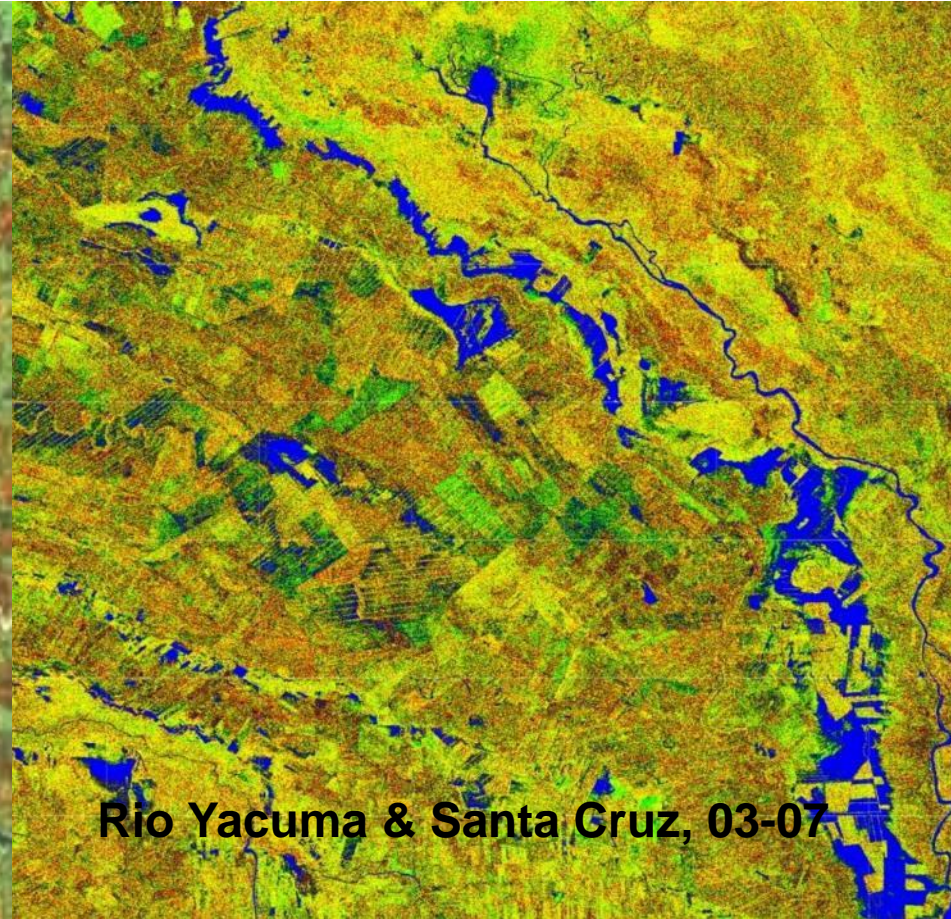

Very few failures: Katrina: New Orleans,



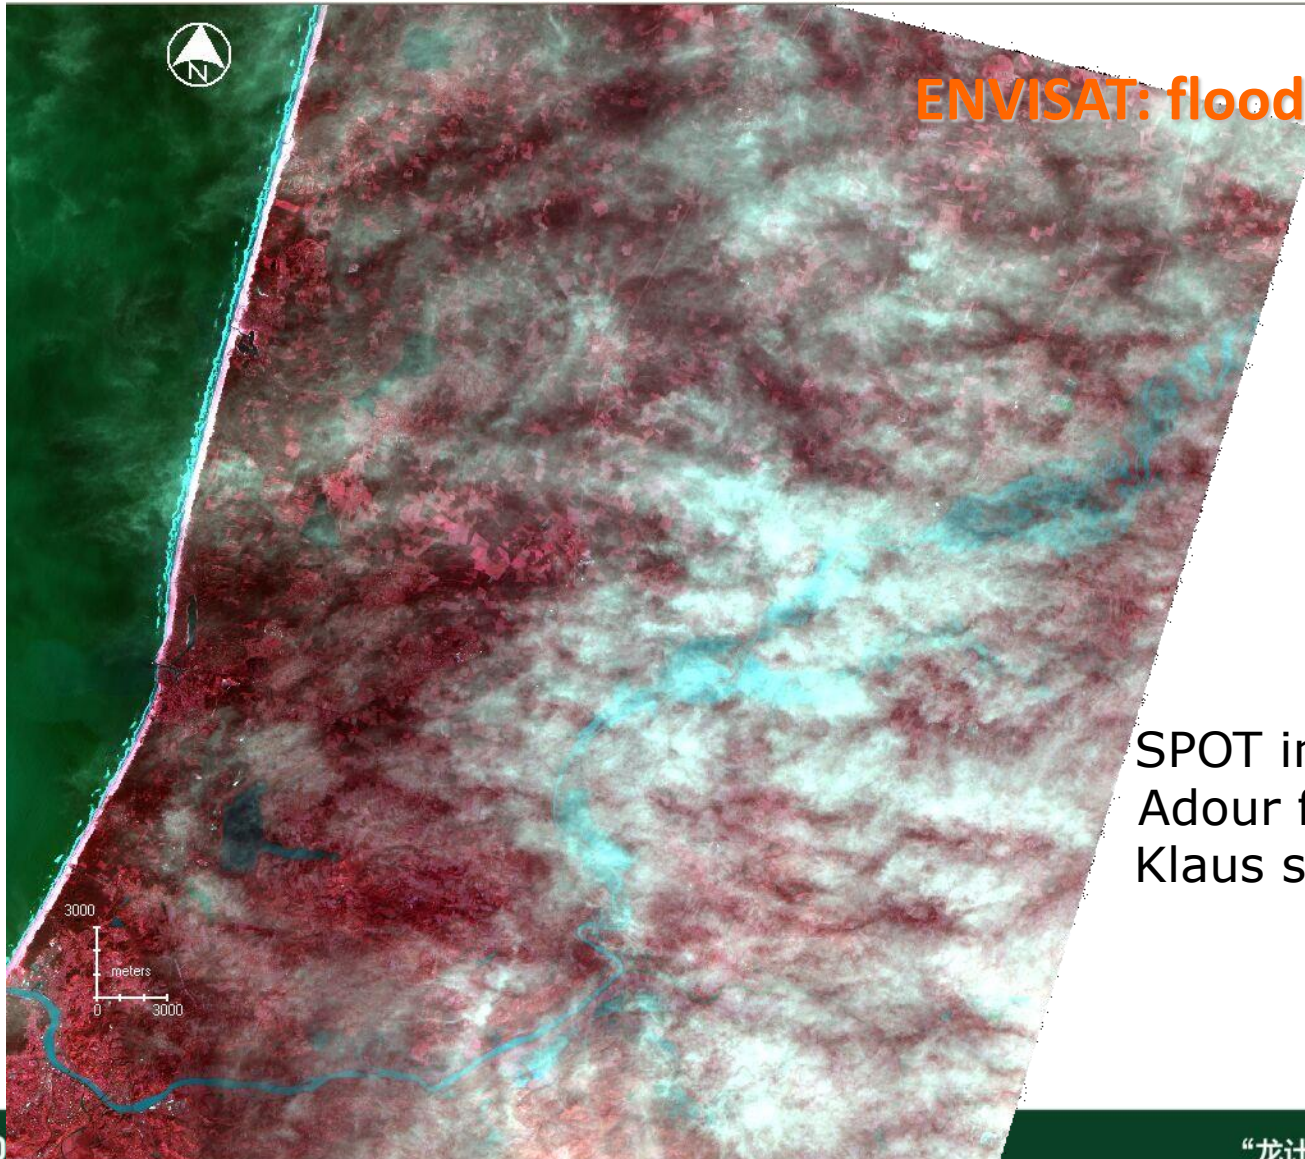


ENVISAT: flood rapid mapping

SPOT image over the Adour flood after the Klaus storm, January 2009



Insar Ers- Envisat tandem Innovative product : Adour flood after the Klaus storm, January 2009

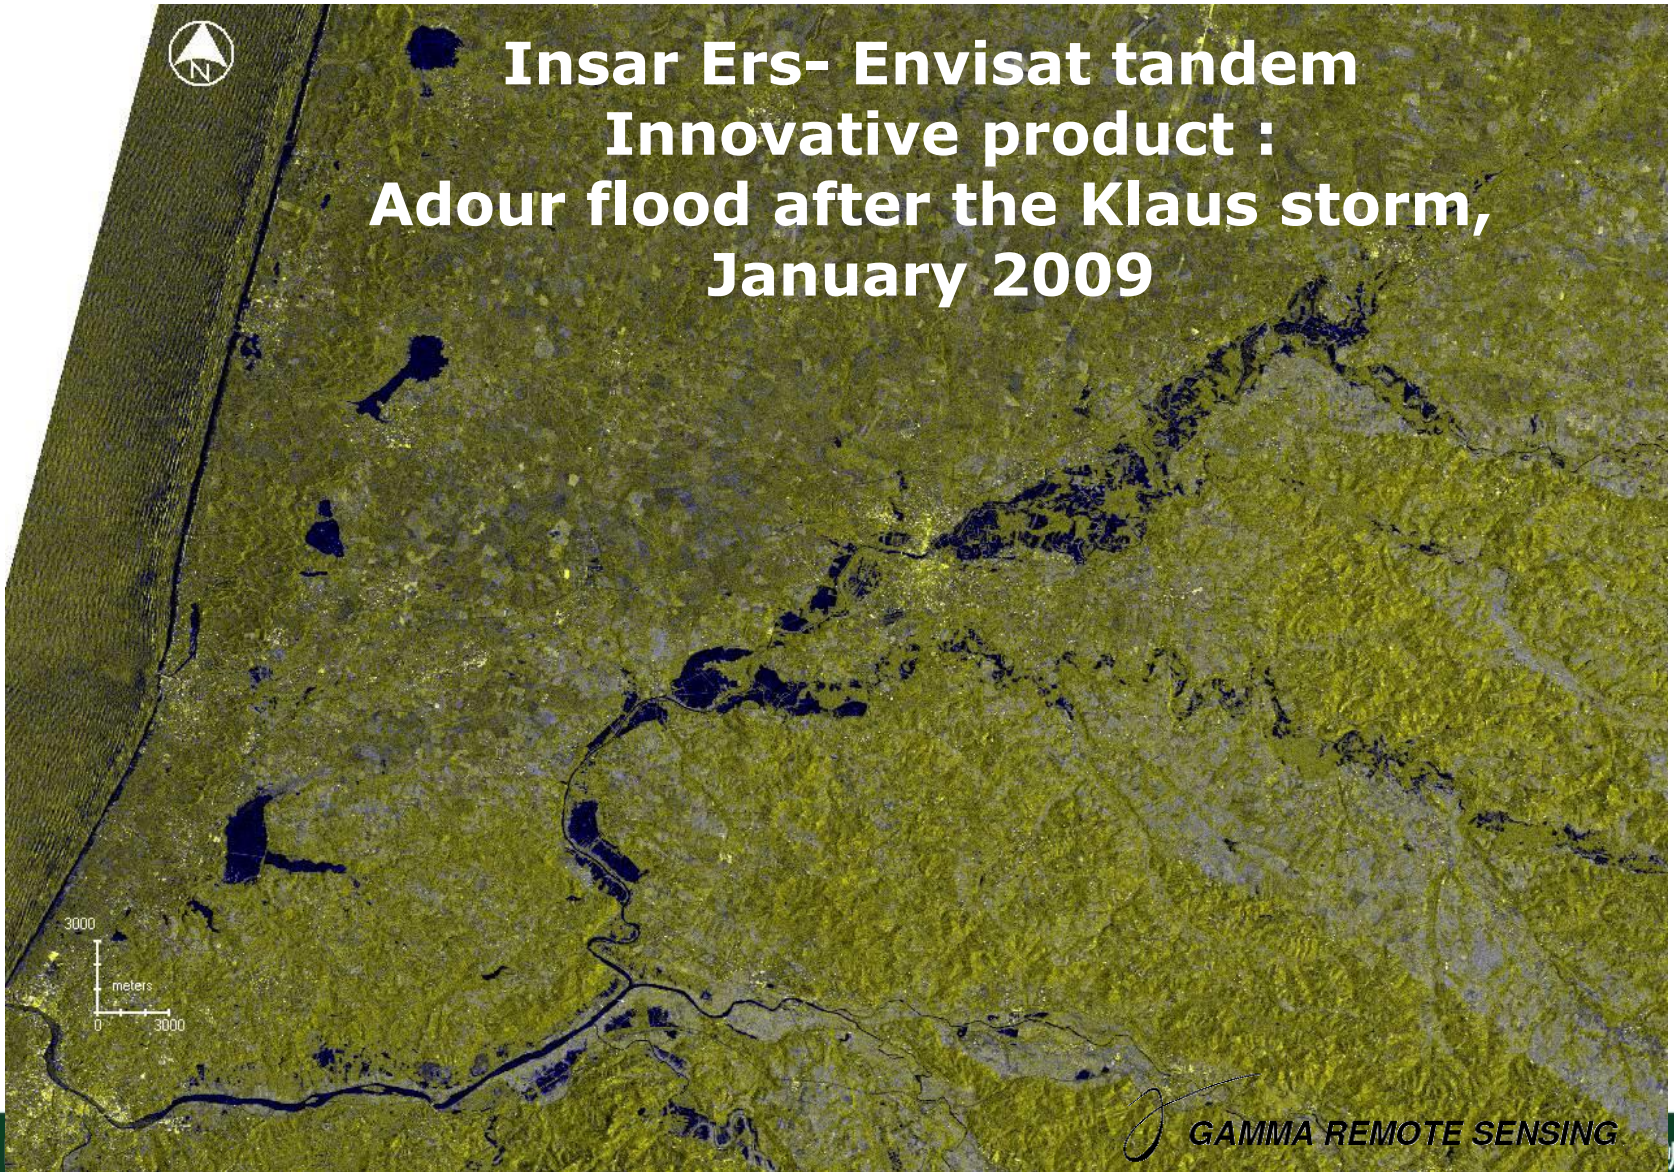


HJ1C:

(Huan Jing-1: Environmental Protection & Disaster Monitoring Constellation


Chinese

Launch: 18-11-2012

- strip map modes: 25m / 5 m
- S band
- Swath: 100 / 40 km
- Single Pol HH or VV
- Cycle 31 days, revisit 4 days
- Lifetime : 3 years with Limited functionality due to damaged antenna

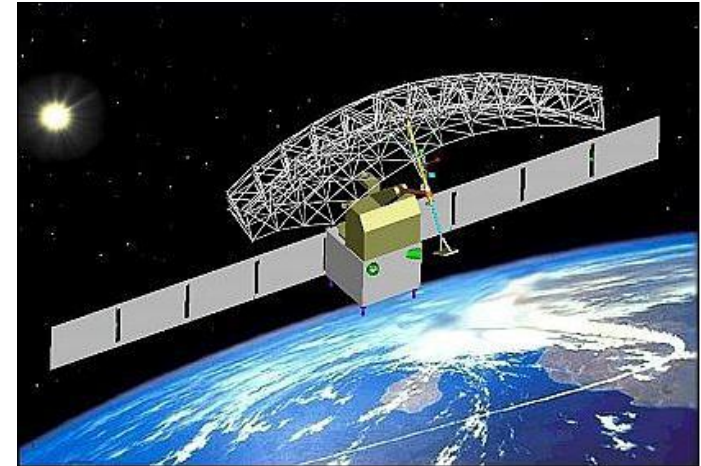

Reportedly the satellite suffered from an antenna problem, which caused a lower than planned resolution. As a remedy, the orbit was lowered.

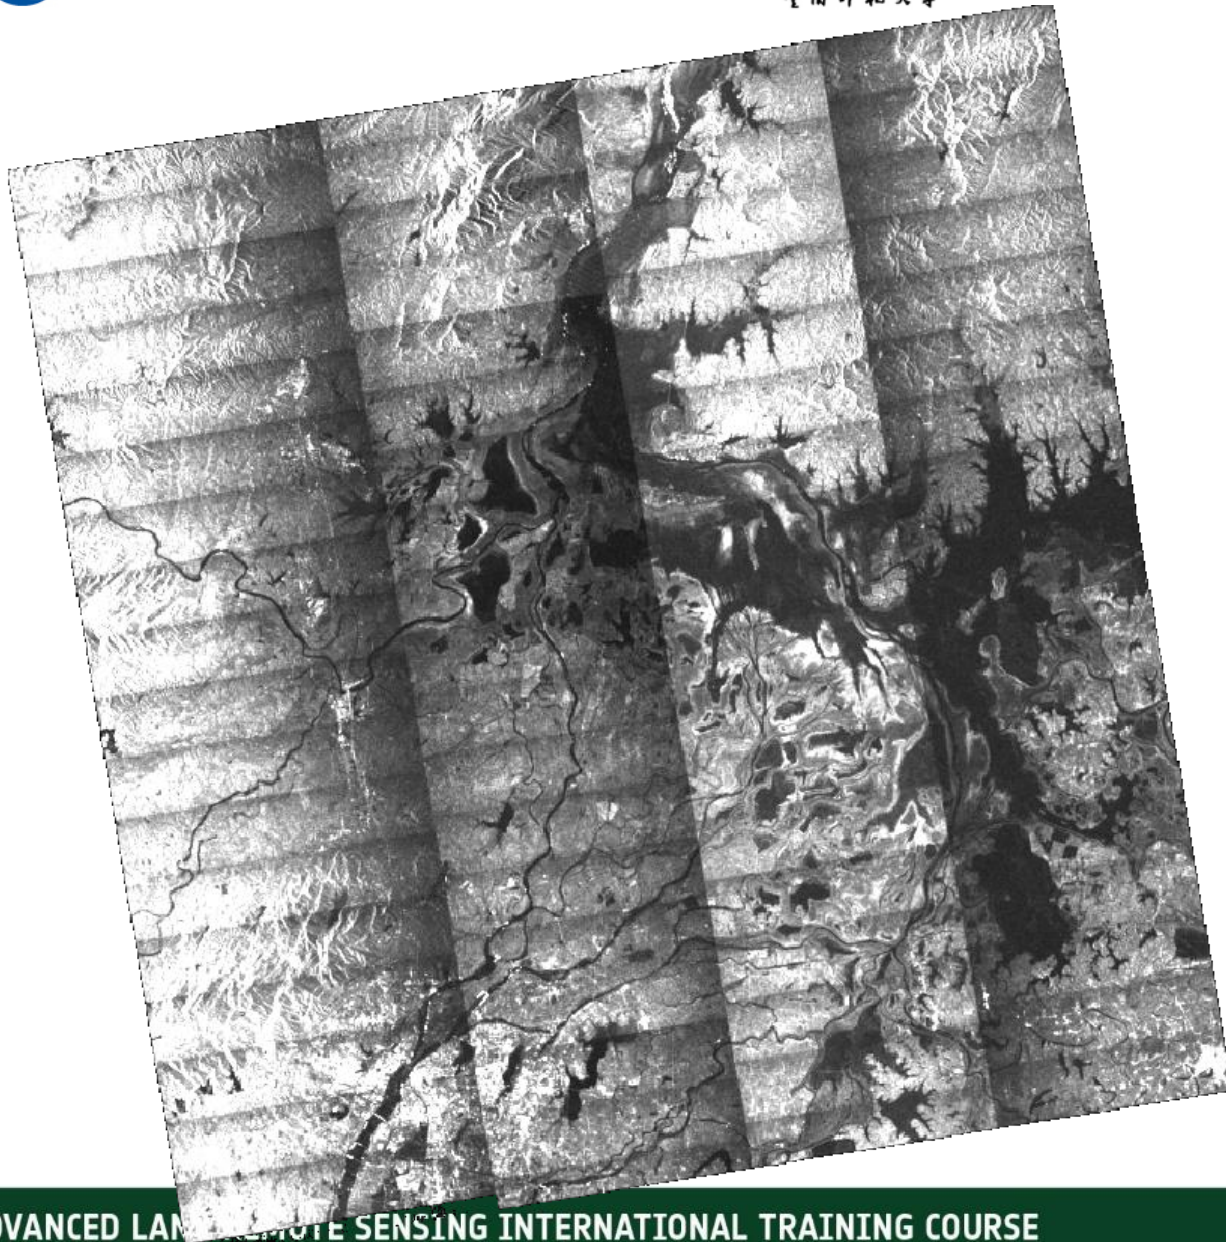

HJ 1C ScanSAR mode 11/03/2013


Relatively high level
of noise: 15-17 db

Lack of radiometric
compensation during
mosaicing phase +
blocs processing =>
patchwork of strips



Water extraction is a little bit
challenging on the ScanSAR data

11/03/2013

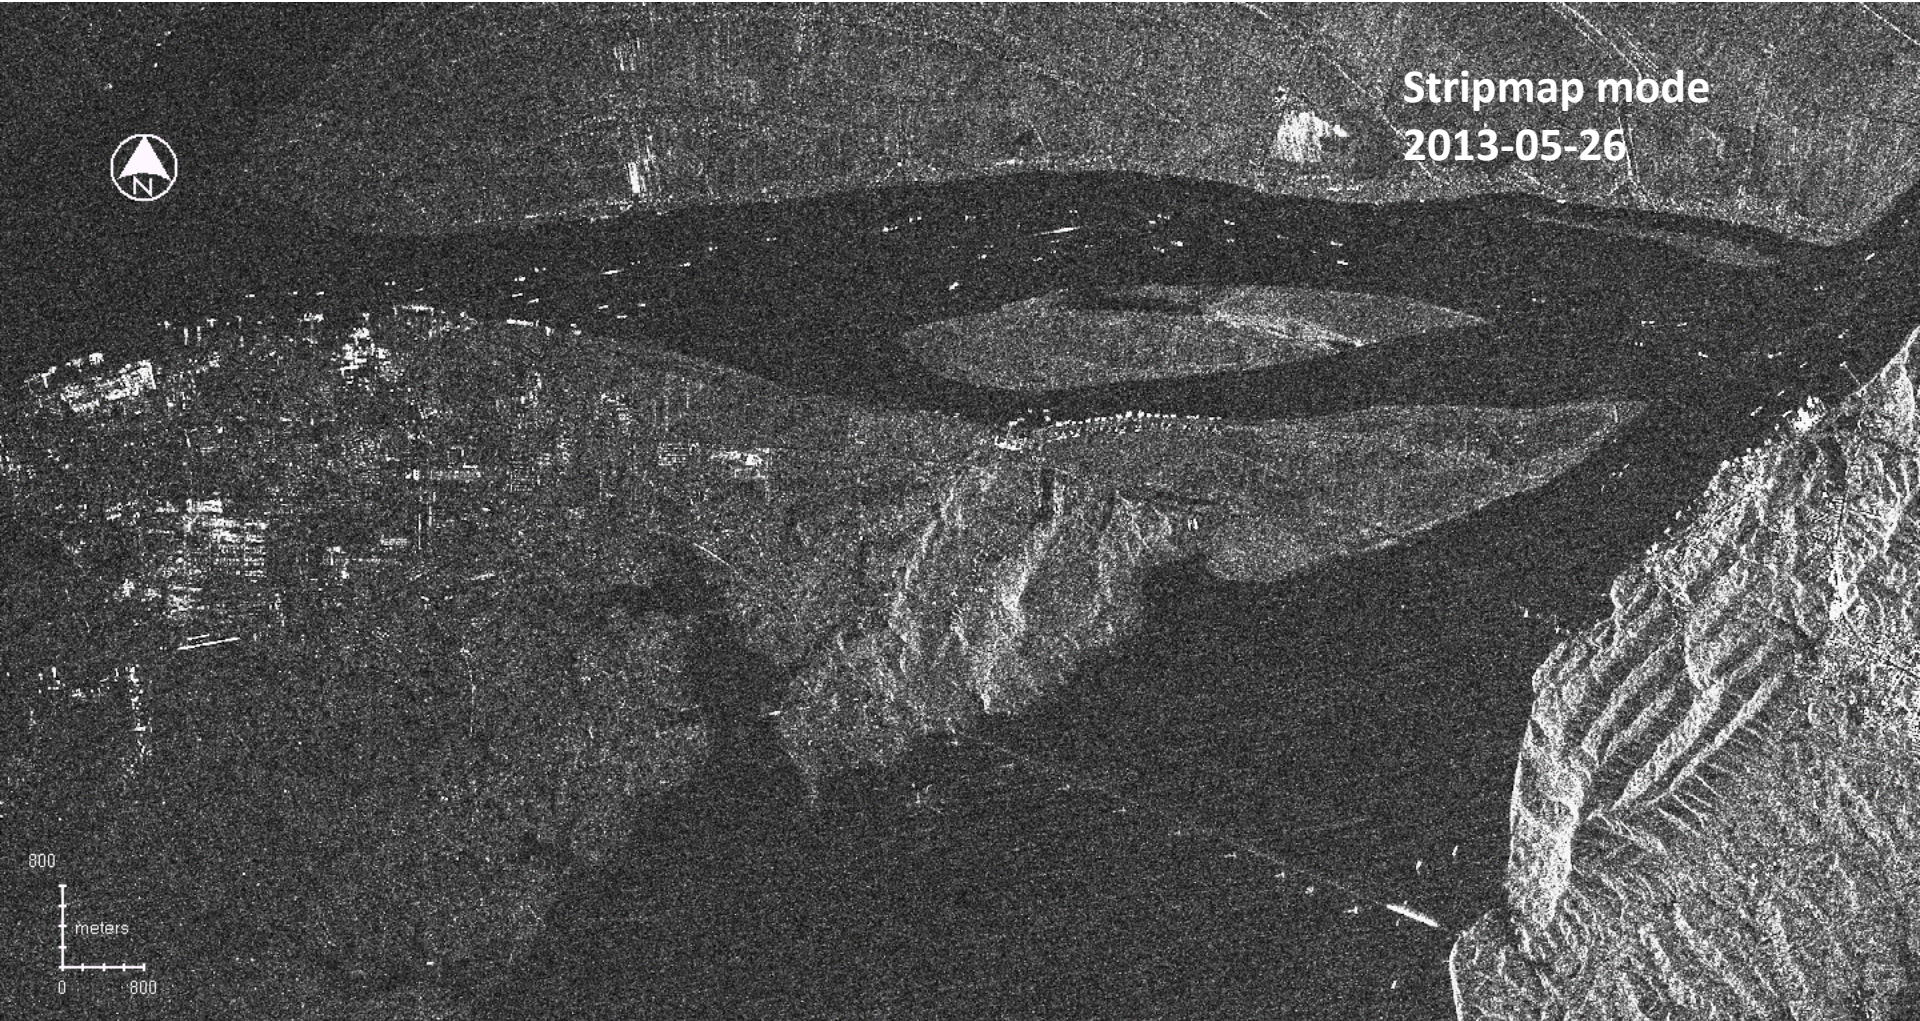

On going SAR Missions

- **2007** : June launches constellation Cosmo Skymed constellation , and Terra SAR X December: Radarsat 2
- **2012** : launch of RISAT (ISRO) , operational mode in 2015
- **2014** : Launch ALOS 2, bande L
- **2014-2016**: Launches of Sentinel 1A and 1B (Constellation Copernicus)
- **2016** : Gaofeng 3, C band (Quad Pol)

SENTINEL 1

The Sentinel-1 series : part of the GMES programme
Sentinel1A, 2014 Sentinel1B, 2016




Priority : ensure continuity for C-band data
Improvement of SAR signal (30% better than ENVISAT)

Multi mode


- Strip map: 80 km swath , 5m
- Interferometric Wide swath mode IW, 250km, 20 m
- Extra wide EW Swath , 400 km , 25x100 m
- Wave mode, WV, low data rate, 5x20m
- Swath 250 km

Polarisation modes:

- VV or HH in wave mode
- Selectable dual pol for all other mode HH+HV; VV+VH

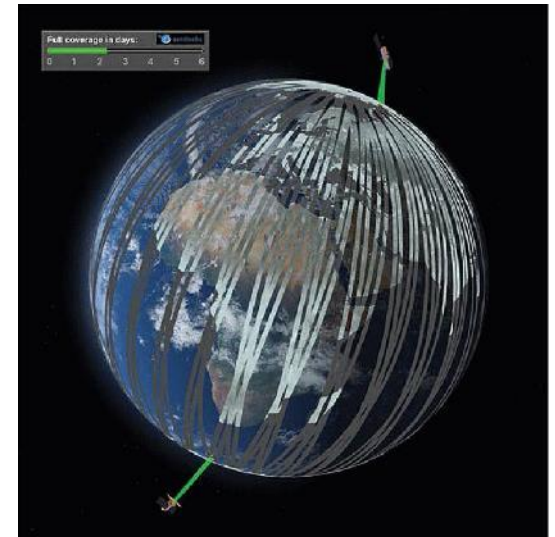

Copernicus missions (ESA) exploitable for hydrology

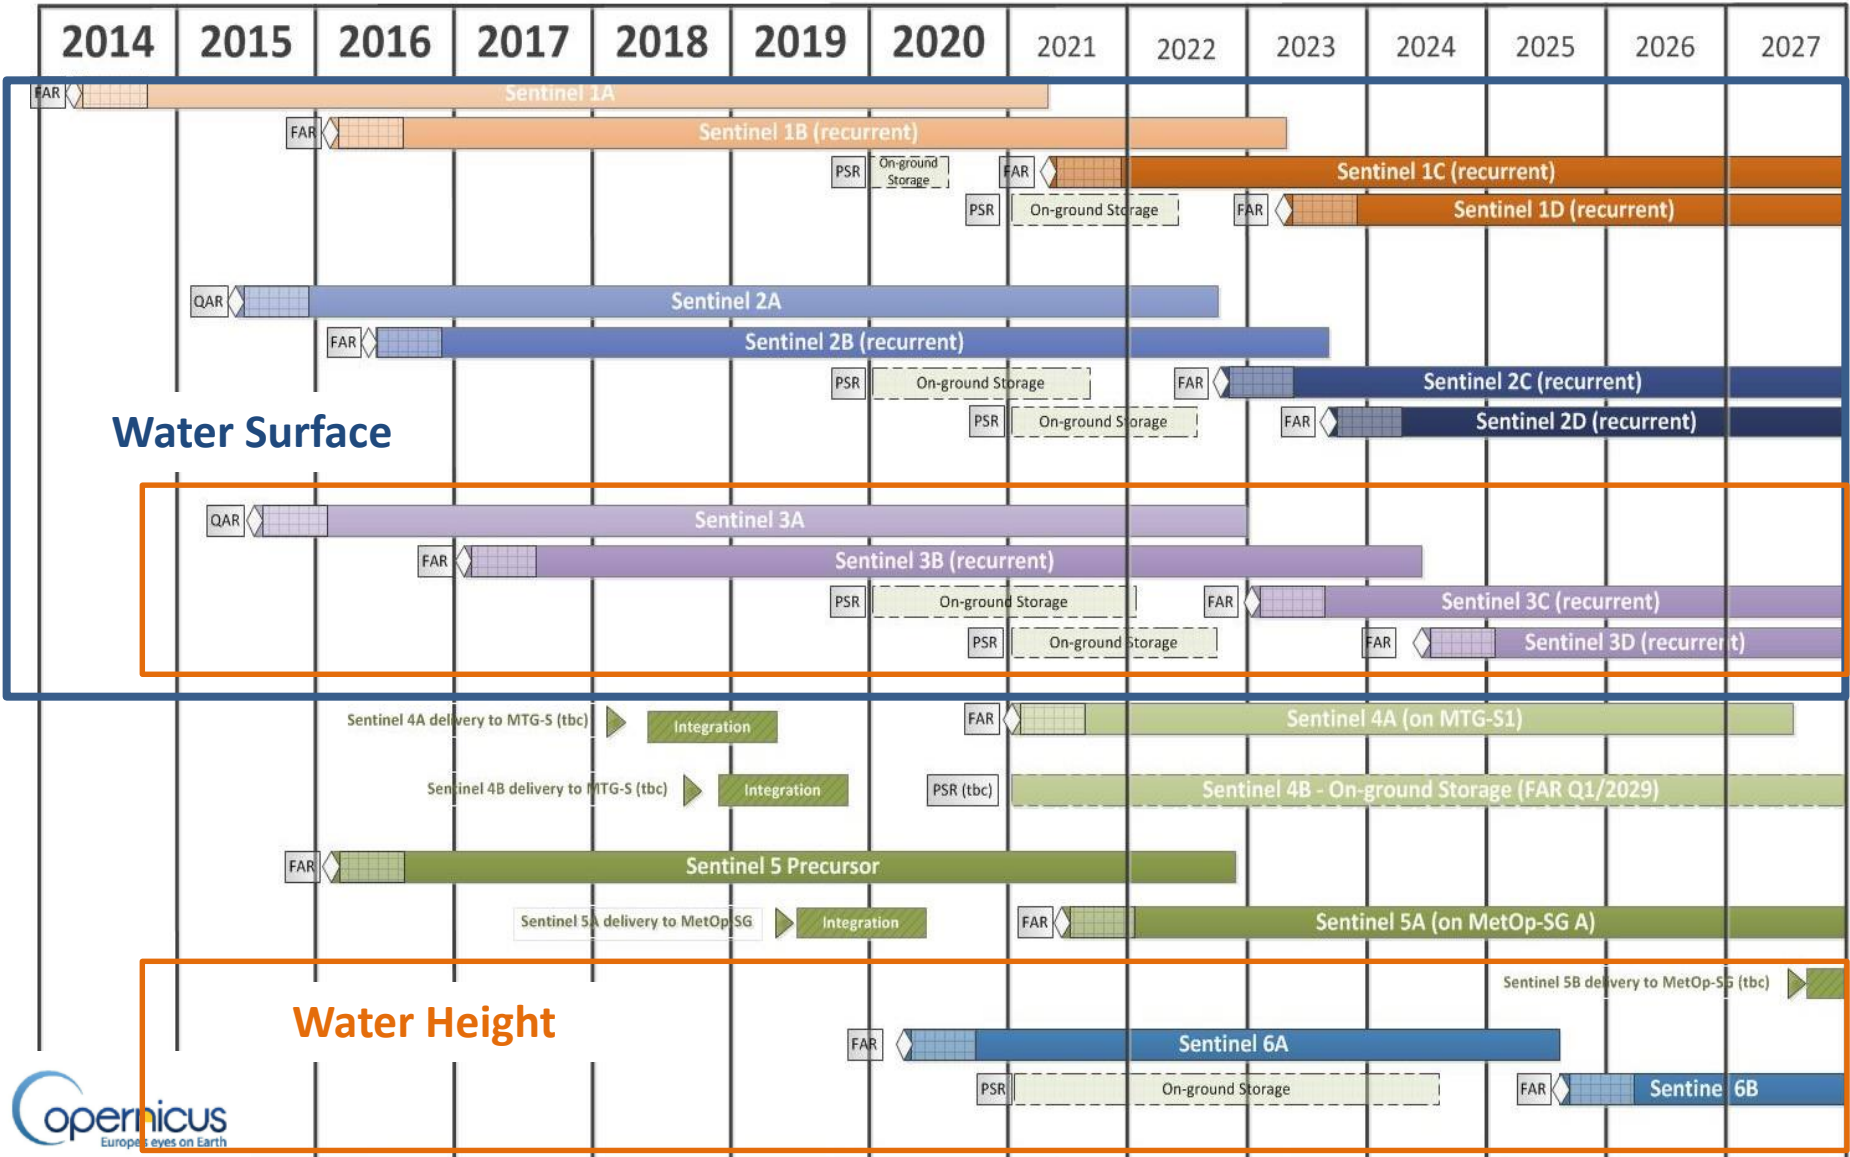

SENTINEL 1

Acquisition mode	Product type	Resolution class	Resolution (range x azi) (m)	Pixel spacing (range x azi) (m)	No of looks (range x azi)	ENL
SM (Stripmap Mode)	SLC	-	1.7 x 4.3 to 3.6 x 4.9	1.5 x 3.6 to 3.1 x 4.1	1 x 1	1
	GRD	FR	9 x 9	4 x 4	2 x 2	3.9
		HR	23 x 23	10 x 10	6 x 6	34.4
		MR	84 x 84	40 x 40	22 x 22	464.7
IW (Interferometric Wide Swath)	SLC	-	2.7 x 22 to 3.5 x 22	2.3 x 17.4 to 3 x 17.4	1	1
	GRD	HR	20 x 22	10 x 10	5 x 1	4.9
		MR	88 x 89	40 x 40	22 x 5	105.7
EW (Extra Wide Swath)	SLC	-	7.9 x 42 to 14.4 x 43	5.9 x 34.7 to 12.5 x 34.7	1 x 1	1
	GRD	HR	50 x 50	25 x 25	3 x 1	3
		MR	93 x 87	40 x 40	6 x 2	12
WV (Water Vapor)	SLC	-	2.0 x 4.8 and 3.1 x 4.8	1.7 x 4.1 and 2.7 x 4.1	1 x 1	1
	GRD	MR	52 x 51	25 x 25	13 x 13	139.7


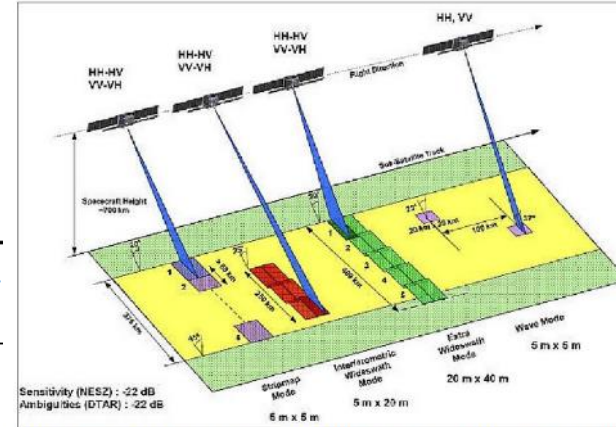



Figure 129: Overview of the Sentinel-1 C-SAR instrument observation scheme and operational support (image credit: ESA)

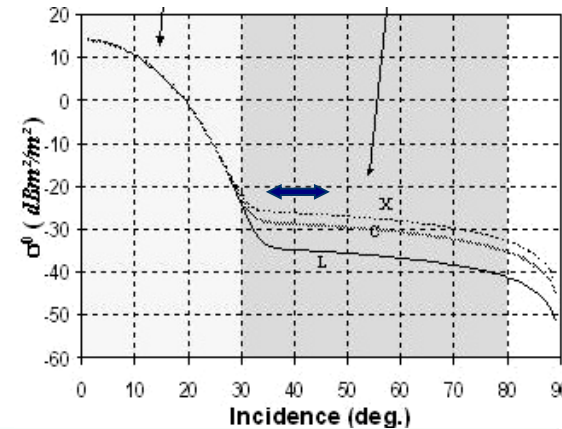

“龙计划4” 高级陆地遥感国际培训班

2017年11月20日—11月25日 云南师范大学, 中国, 昆明

Sentinel 1 expect in term of swath coverage : standard mode

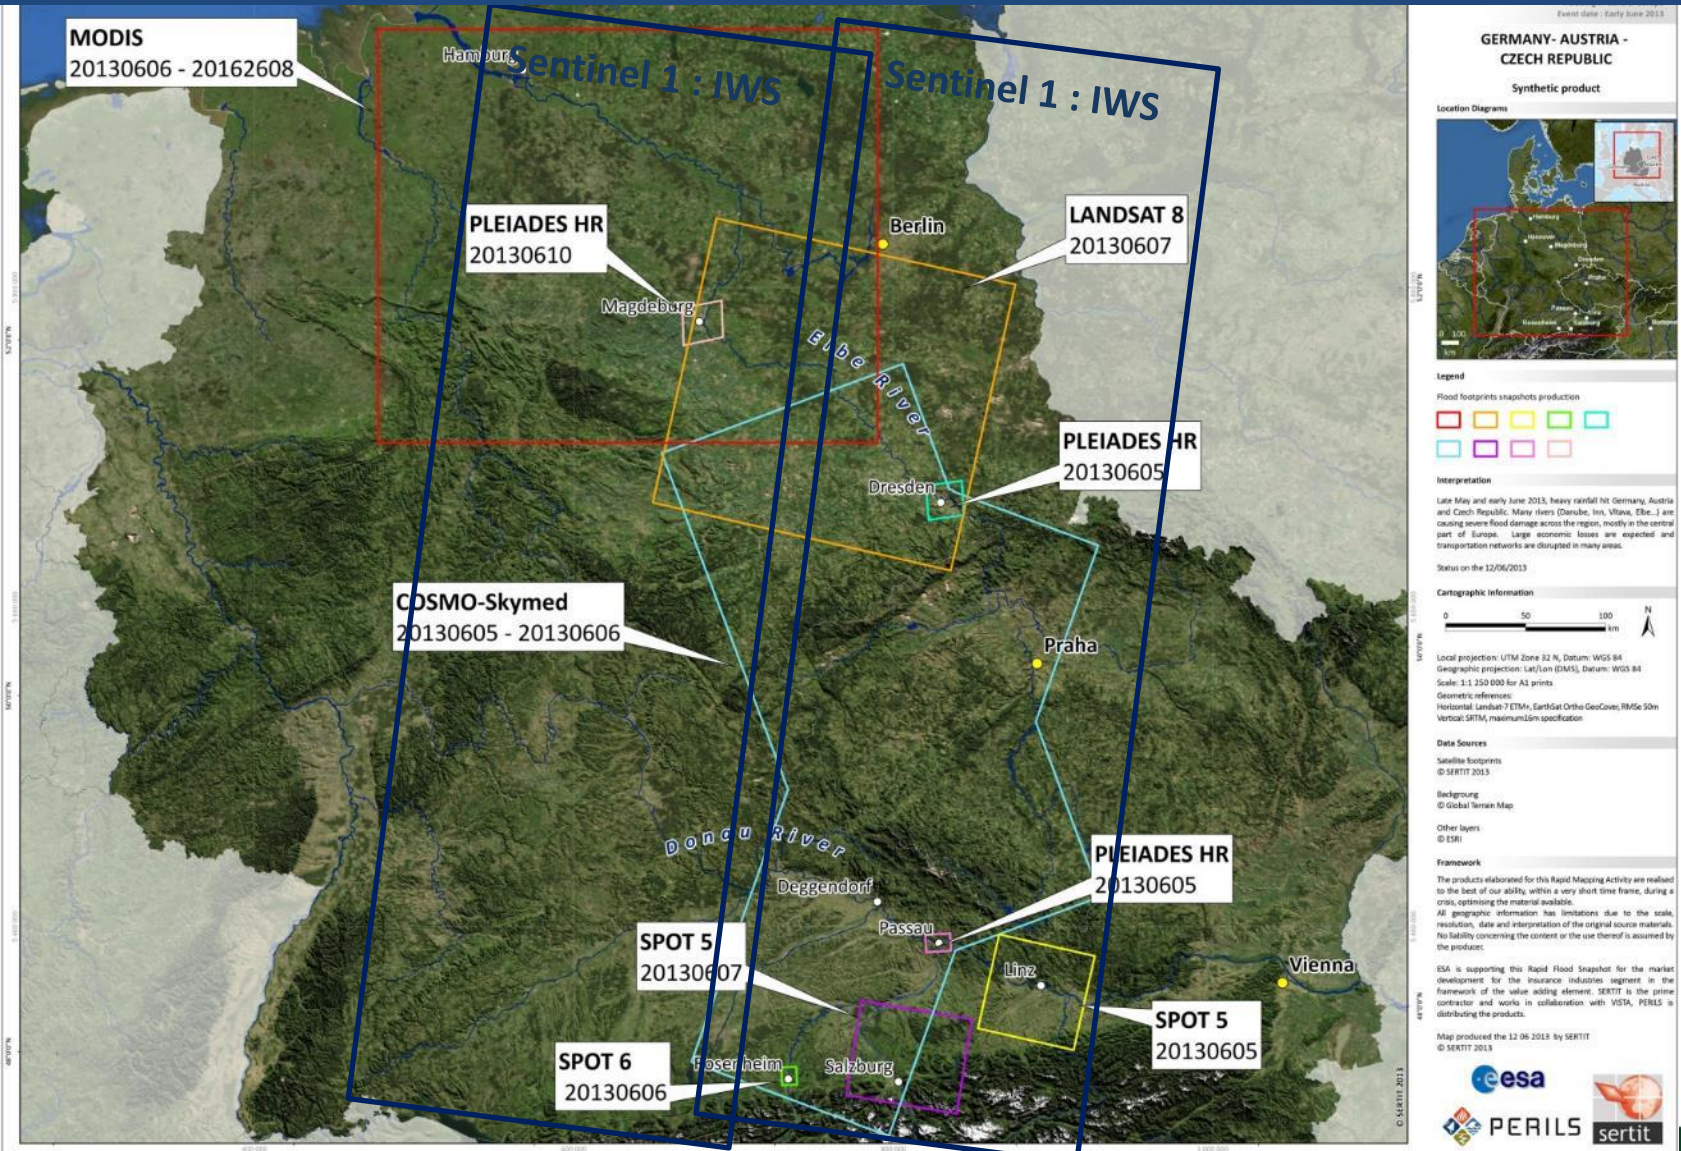



In term of swath

Envisat ASAR WSM



41°

ASAR WSM ENVISAT

400 km

26° - 41° ENL 10.5

Sentinel 1

250 km

30° - 45 ENL: 4.9

ASAR APP S4
ENVISAT

88 km

31-36° ENL 1.9

Sentinel-1A

Envisat ASAR APP





115°57'0"E

116°0'0"E

116°3'0"E



115°57'0"E



116°0'0"E



116°3'0"E

Envisat ASAR APP - 12.50 m

Land/water surfaces
discrimination
Major land use such
as town, network,
infrastructure,
agricultural parceling

29°16'0"N

29°12'0"N

29°9'0"N

29°15'0"N

29°12'0"N

29°9'0"N

Acquired the 18/09/2005 - HH-HH-HV




115°57'0"E

116°0'0"E

116°3'0"E

Sentinel-1A - 10 m

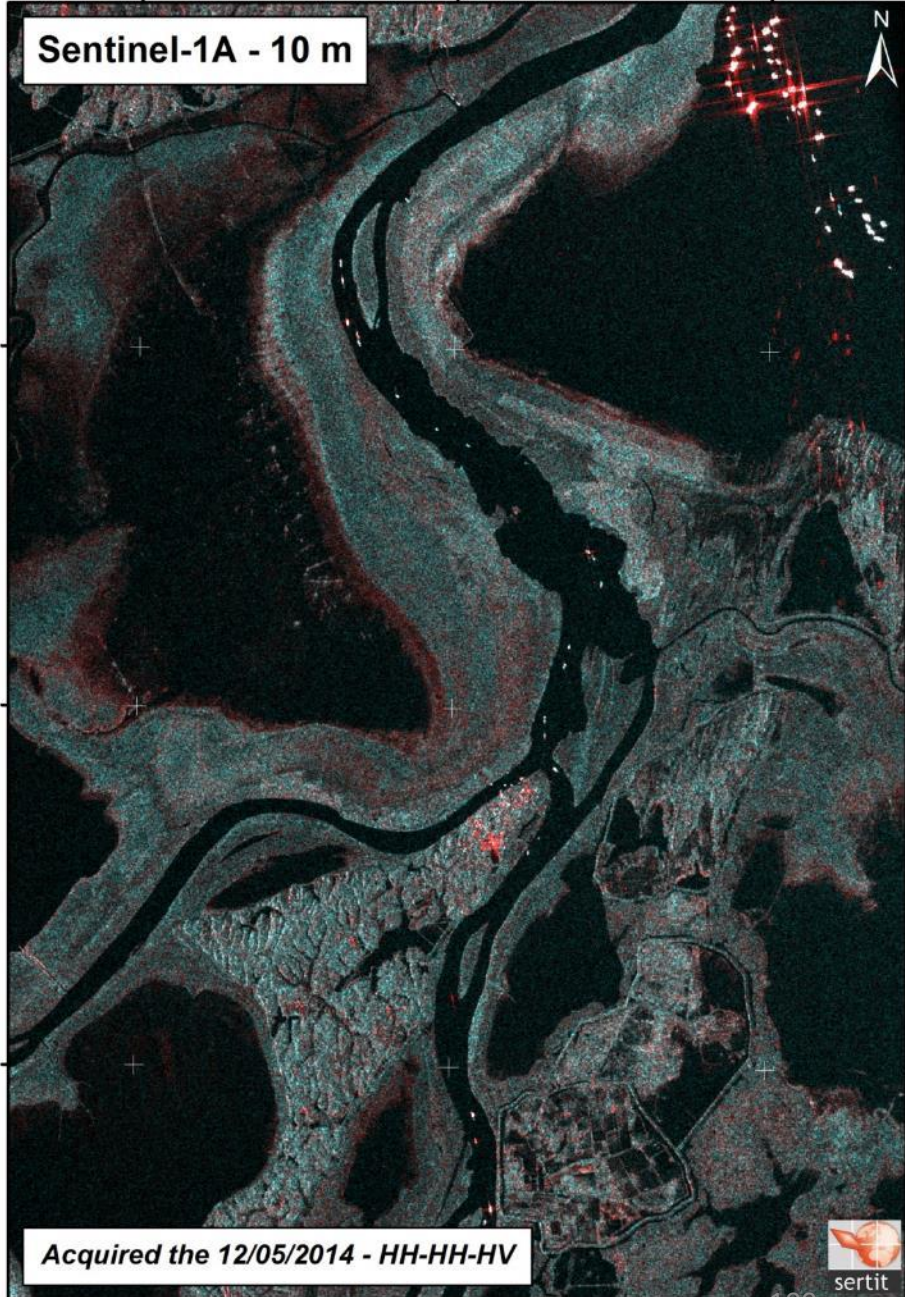

Acquired the 12/05/2014 - HH-HH-HV



115°57'0"E

116°0'0"E

116°3'0"E



116°6'0"E

116°9'0"E

Envisat ASAR APP - 12.50 m


29°36'0"N



29°33'0"N



Acquired the 18/09/2005 - HH-HH-HV



116°6'0"E

116°9'0"E



116°6'0"E

116°9'0"E

Sentinel-1A - 10 m

29°36'0"N

29°36'0"N

29°33'0"N

29°33'0"N

**Ship detection
Land/water surfaces
discrimination
Major land use such
as town, network,
infrastructure**

Acquired the 12/05/2014 - HH-HH-HV



116°6'0"E

116°9'0"E



Sentinel Flood mapping: a rare example of strip map exploitation

Bosnia and Herzegovina

May 2014




Consequences within the AOI on 04/09/2015


Category	Area (km²)	Affected Population	Total in AOI
Flooded area	46270	1462176	1462176
Settlements	4142	26718	26718
Transportation	21	882	882
Primary roads	8	2248	2248
Secondary roads	13	2248	2248



04 September 2015

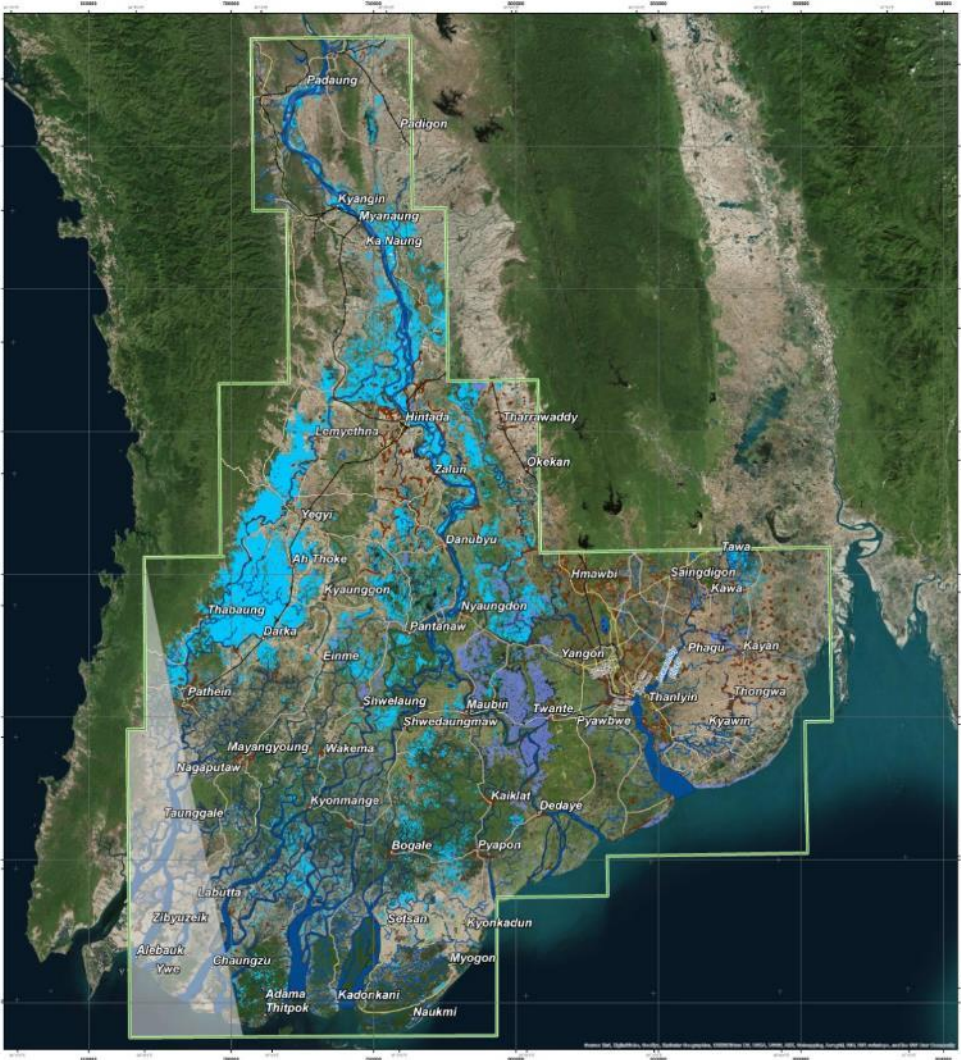

Myanmar
 Heavy monsoon rain caused
 river overflow and flooding in
 August 2015

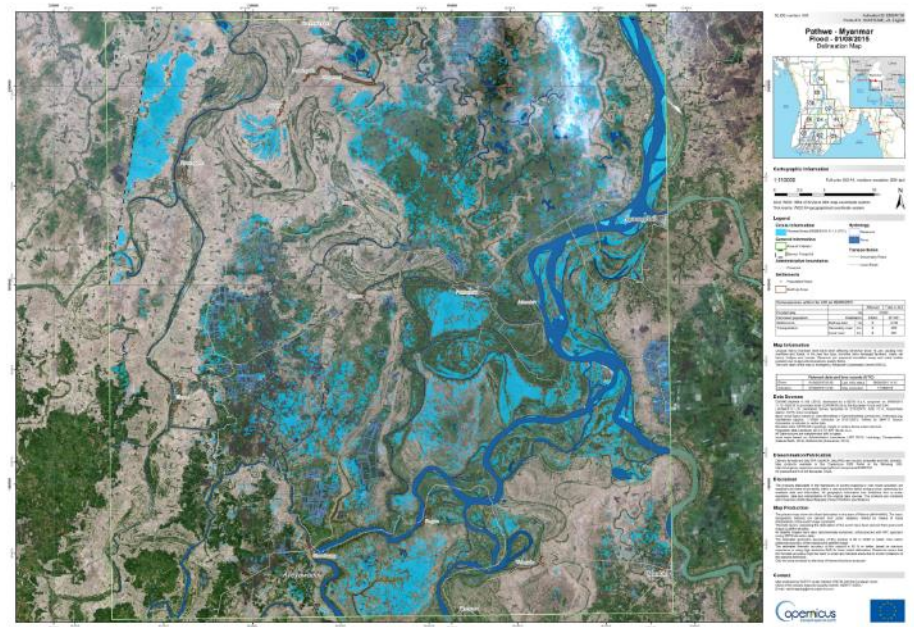

COURSE
H. YESOU 2017

“龙计划4” 高级陆地遥感国际培训班
 2017年11月20日—11月25日 云南师范大学, 中国, 昆明

RISAT

Indian satellite


C Band

Launch: 01 May 2012


- Swath: 10 to 223 km
- Single : Dual Pol (HH+ HV) + Hyd Polarimetry




Mode		Resol (Az rang)	Swath	Pol	Beam
SpotLight	HRS	>2m	10	Dual-hybrid	
Strip map 1	FRS-1	3*2m	25	Dual-hybrid	
Strip map 1	FRS-2	6*4m	25	Quad pol	
MediumScanSAR	MRS	25*8m	115	Dual-hybrid	6
Coarse ScanSAR	CRS	50*8	223	Dual-hybrid	12

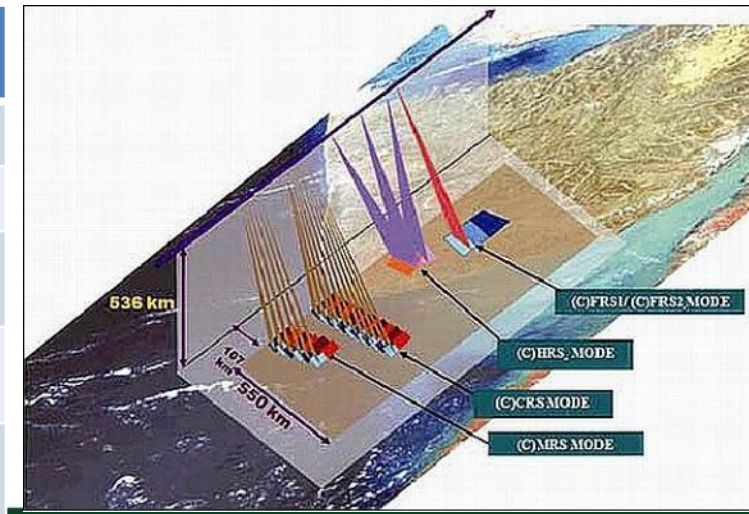


RISAT-1 image of 14-Aug-2014

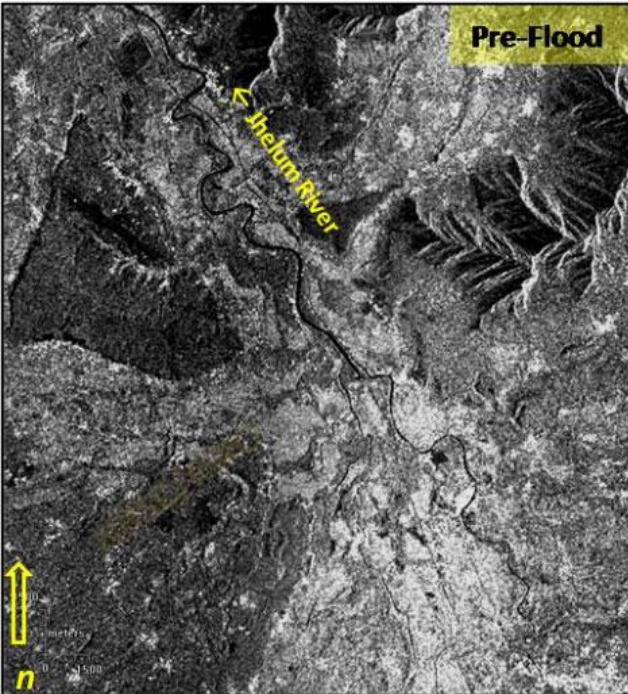

RISAT-1 image of 08-Sep-2014

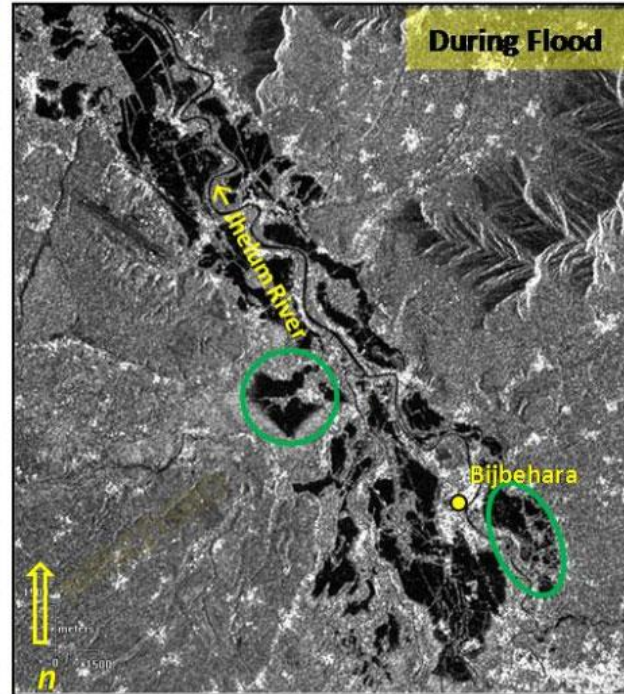

RISAT-1 image of 09-Sep-2014

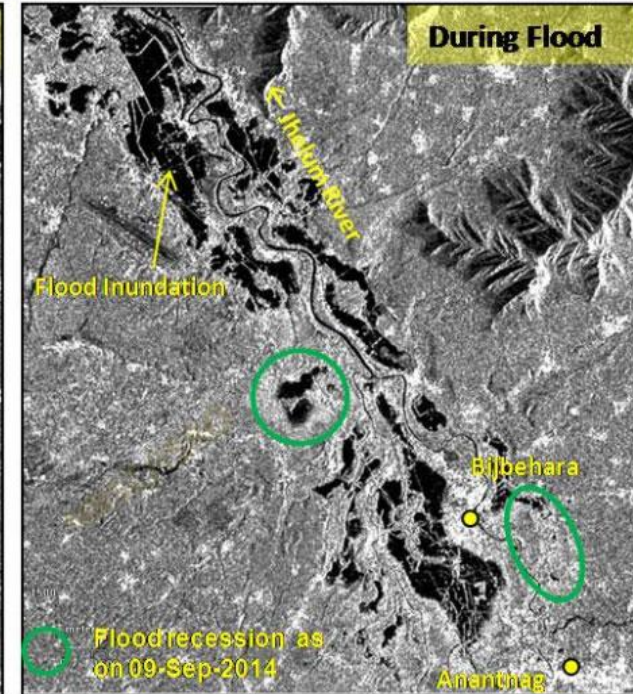

The VHR and polarimetric SAR:

X band VHR SAR: TerraSAR, CosmoSkymed

C BAND: RadarSAT II: VHR and Full Pol

GAOFENG 3: VHR and Full Pol




L Band : PALSAR II bi & Full Pol, large swath ScanSAR mode

The VHR and polarimetric SAR: TerraSAR, CSK

X band VHR satellites

- **Cosmo-Skymed:** Italian, Launch: 08-06-07 , Constellation of 4 Dual civilian-military
- **Terra SAR:** German, Launch: 15-06-07

Multi mode, Spotlight, Stripmap, ScanSar
Pol capabilities

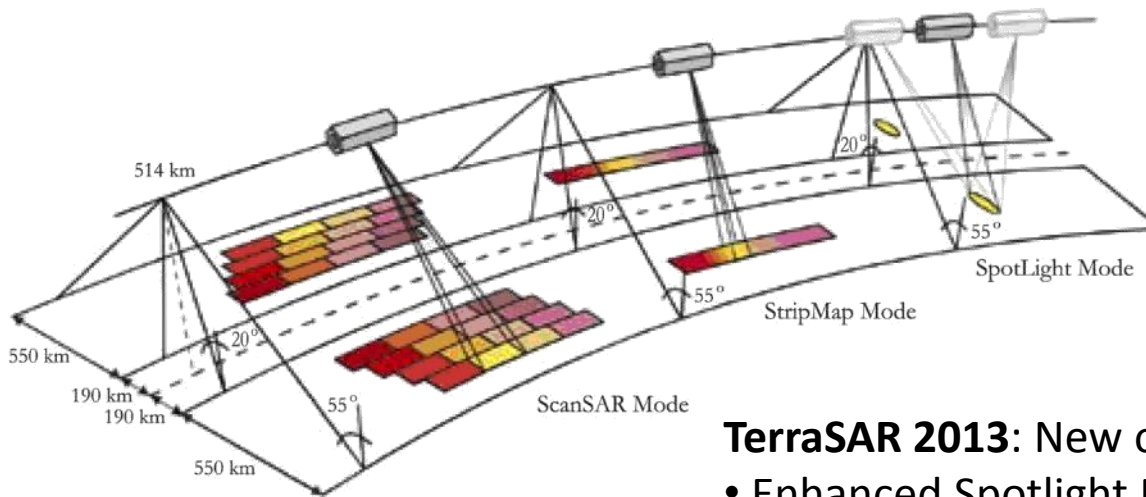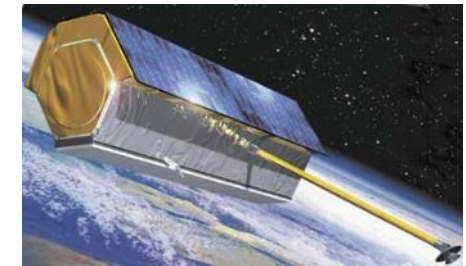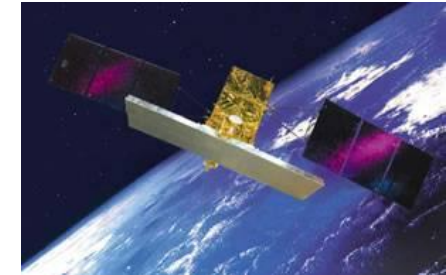

TerraSAR 2013: New operational Imaging Modes


- Enhanced Spotlight Mode (Starring Spotlight).
- ScanSAR :expanded swath width (200 instead of 100km).


The VHR and polarimetric SAR: TerraSAR, CSK

Cosmo Skymed


5m

Po Delta, Italy

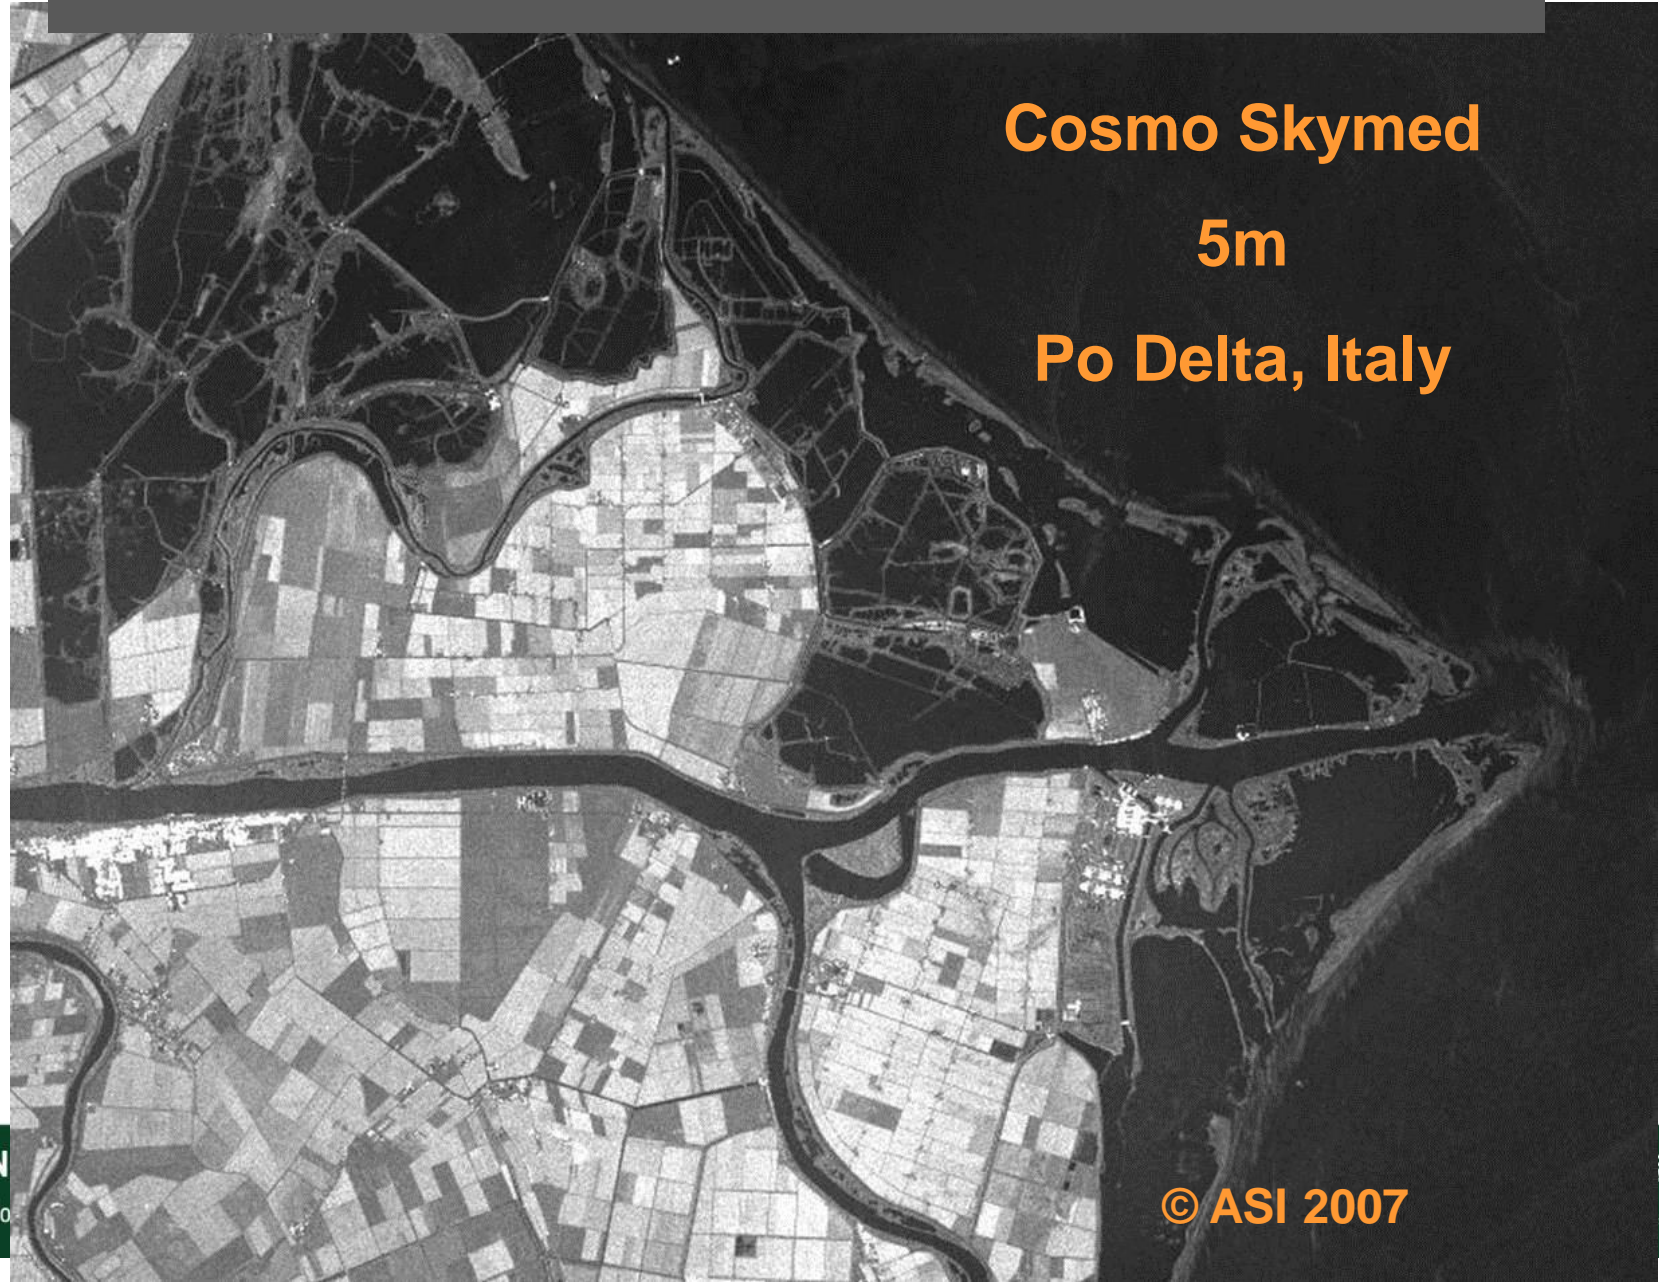

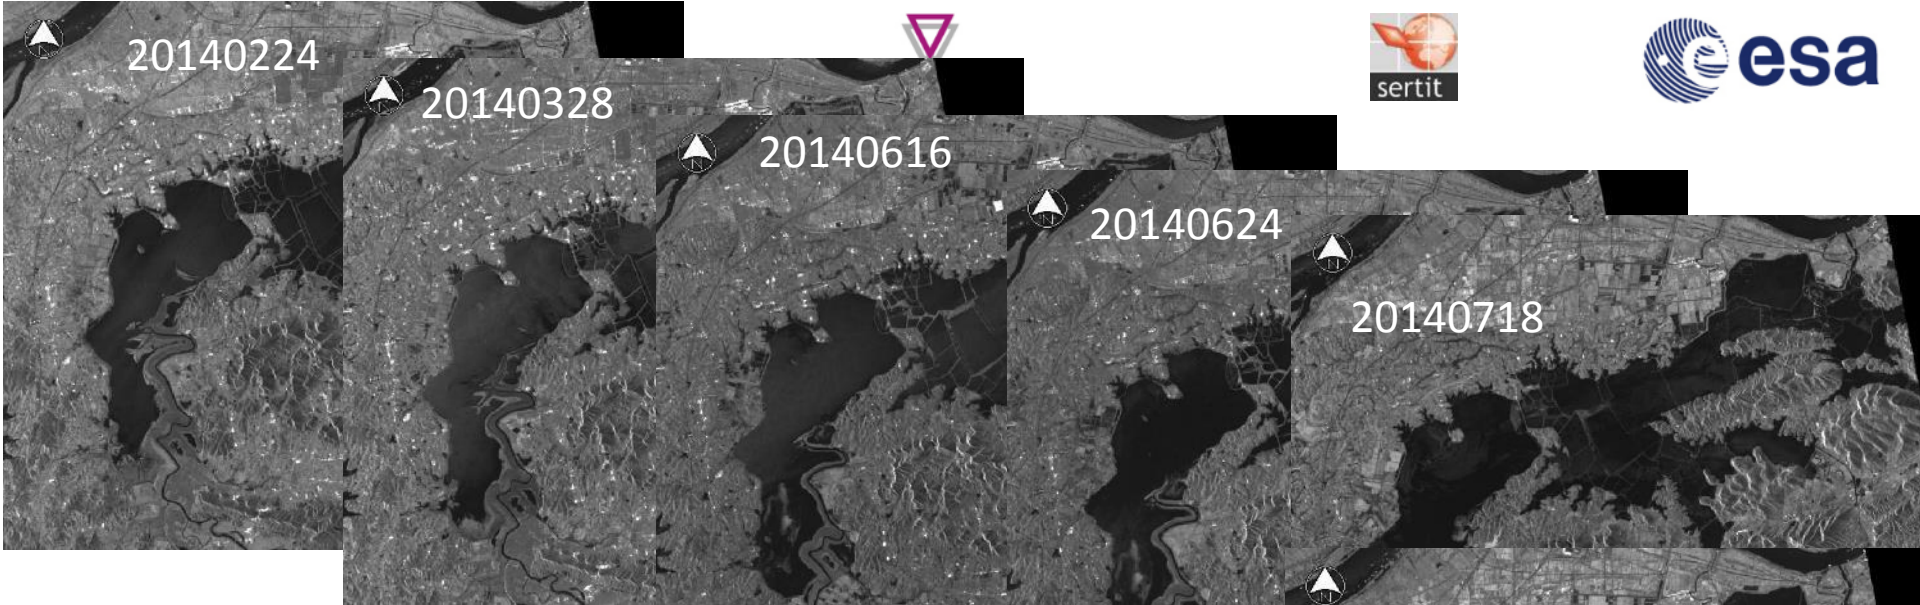

**Shenjiang lake
CSK time series
2014**

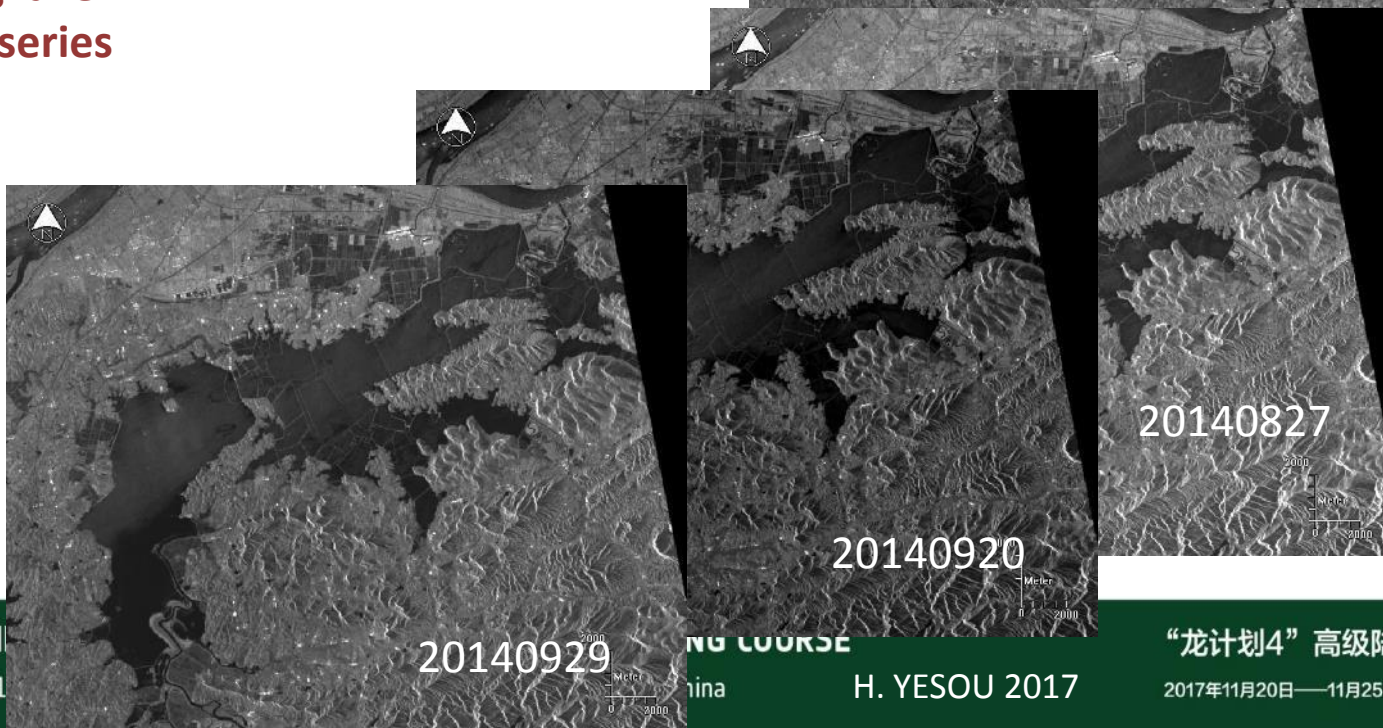



117°0'0"E

117°5'0"E




117°10'0"E

117°15'0"E

Shengjin Lake

Submersion time estimation map

October 2013 - August 2014

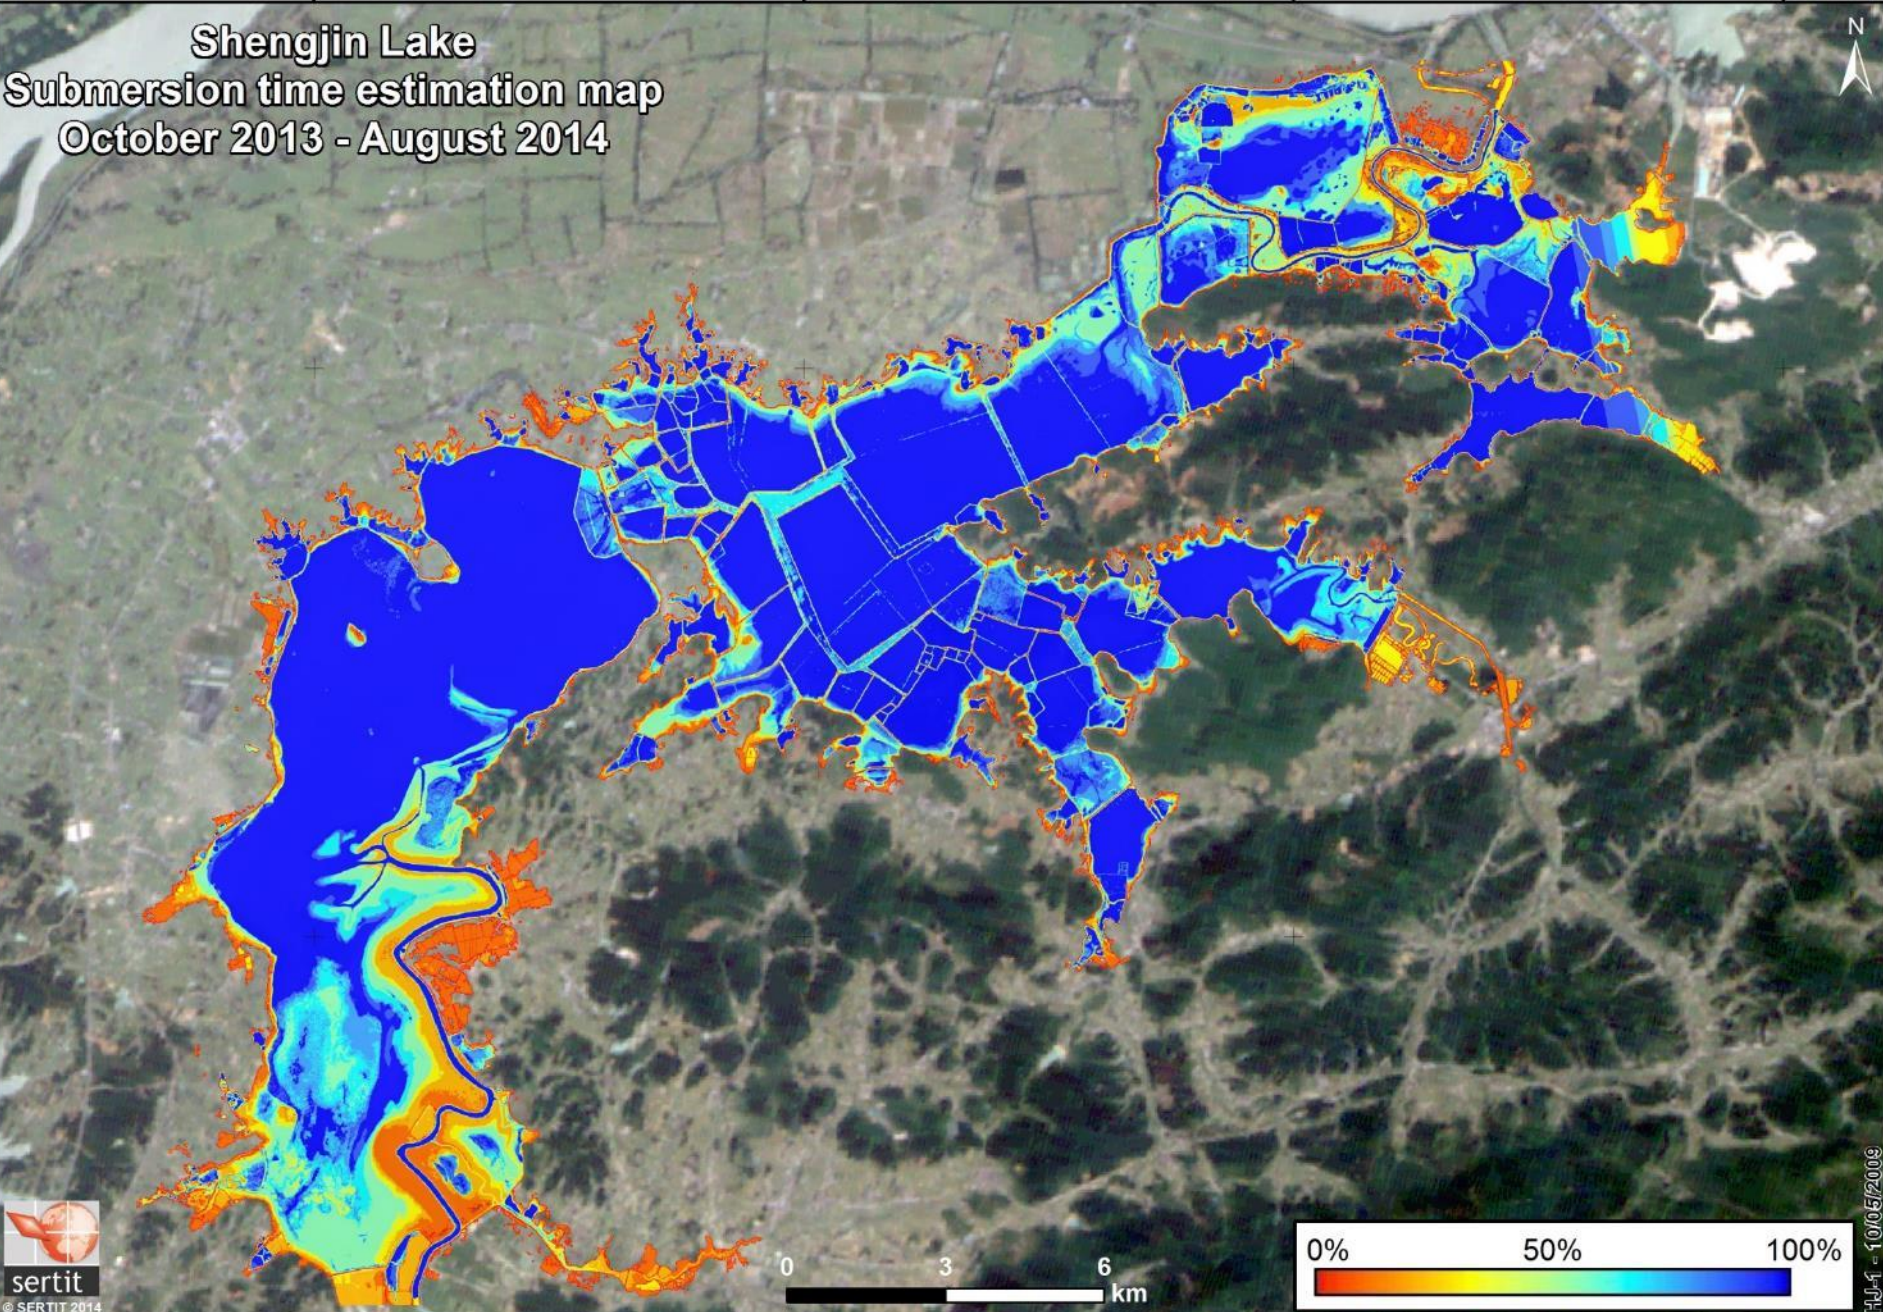

117°0'0"E

117°5'0"E

117°10'0"E


117°15'0"E

HJ-1-100672009

Shengjin Lake

Yearly Submersion Time

2015

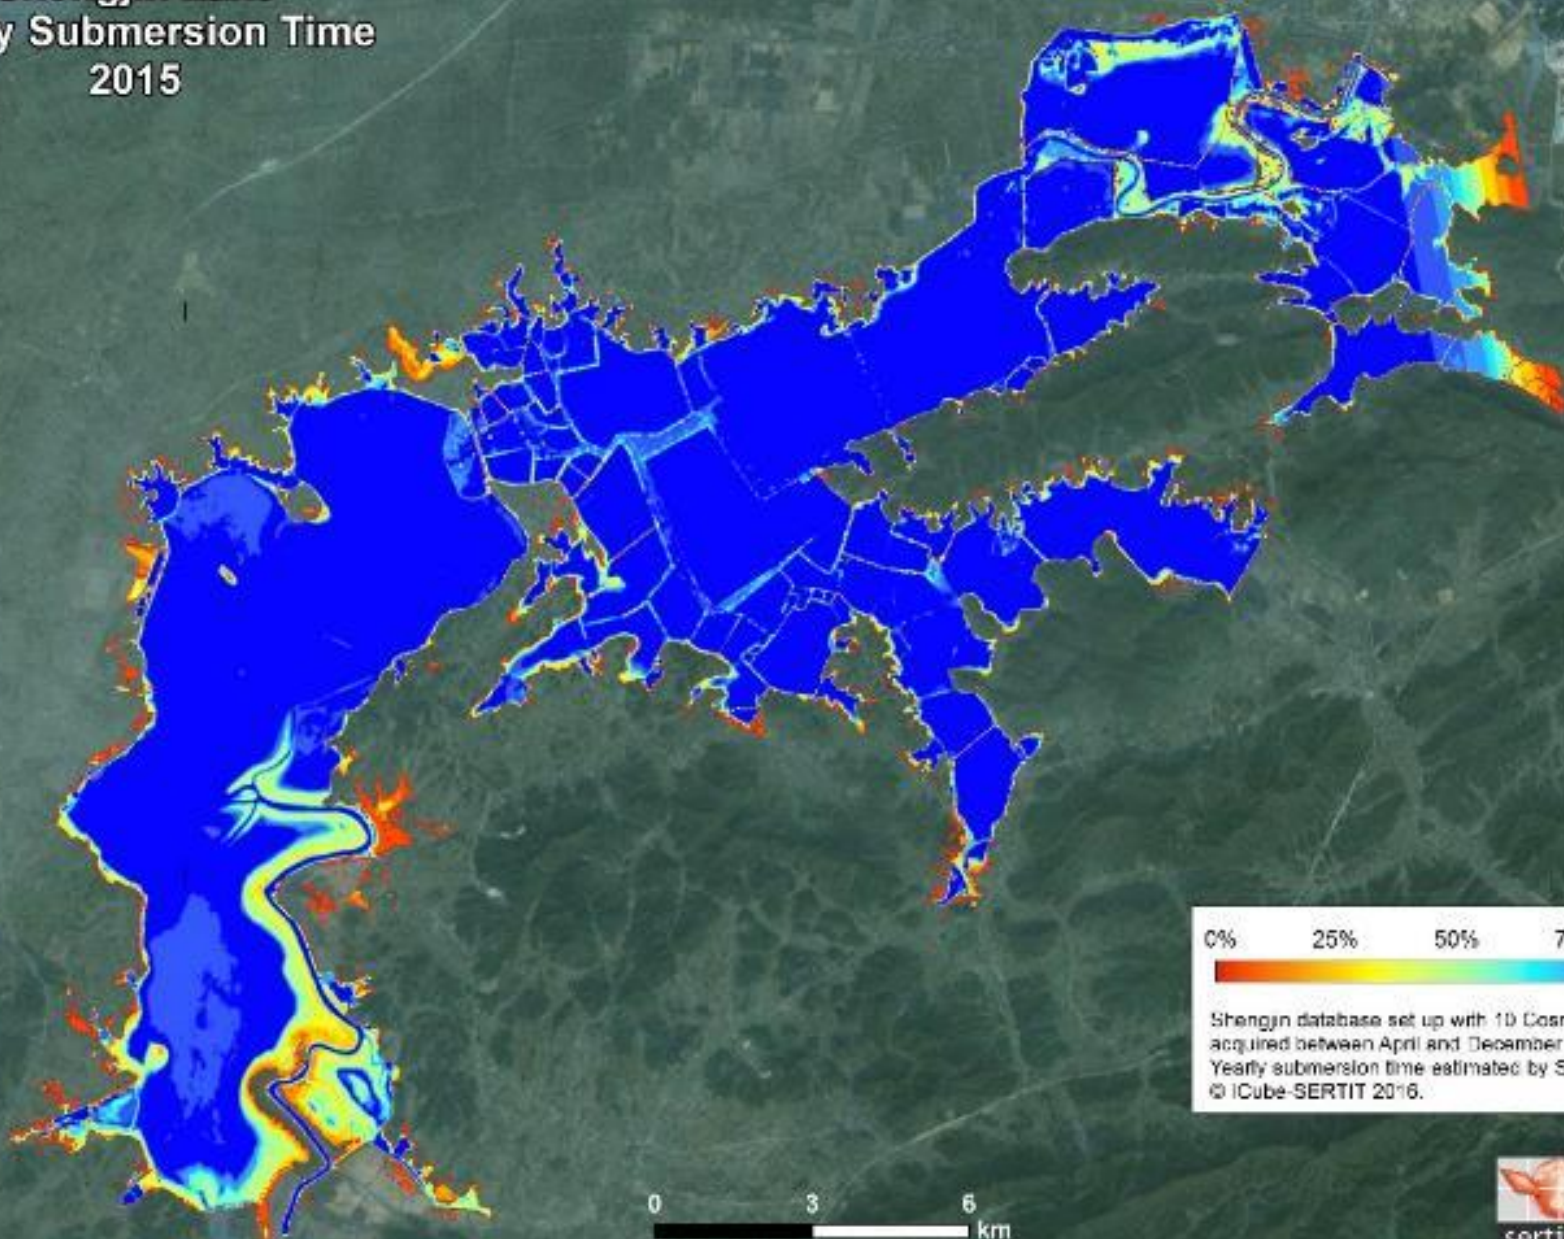

0% 25% 50% 75% 100%


Shengjin database set up with 10 Cosmo-SkyMed data acquired between April and December 2015.
Yearly submersion time estimated by SERTIT.
© ICube-SERTIT 2016.

0 3 6 km

34°25'N
34°20'N

ESRI World Imagery

Water bodies mapping based on Cosmo Skymed Data:

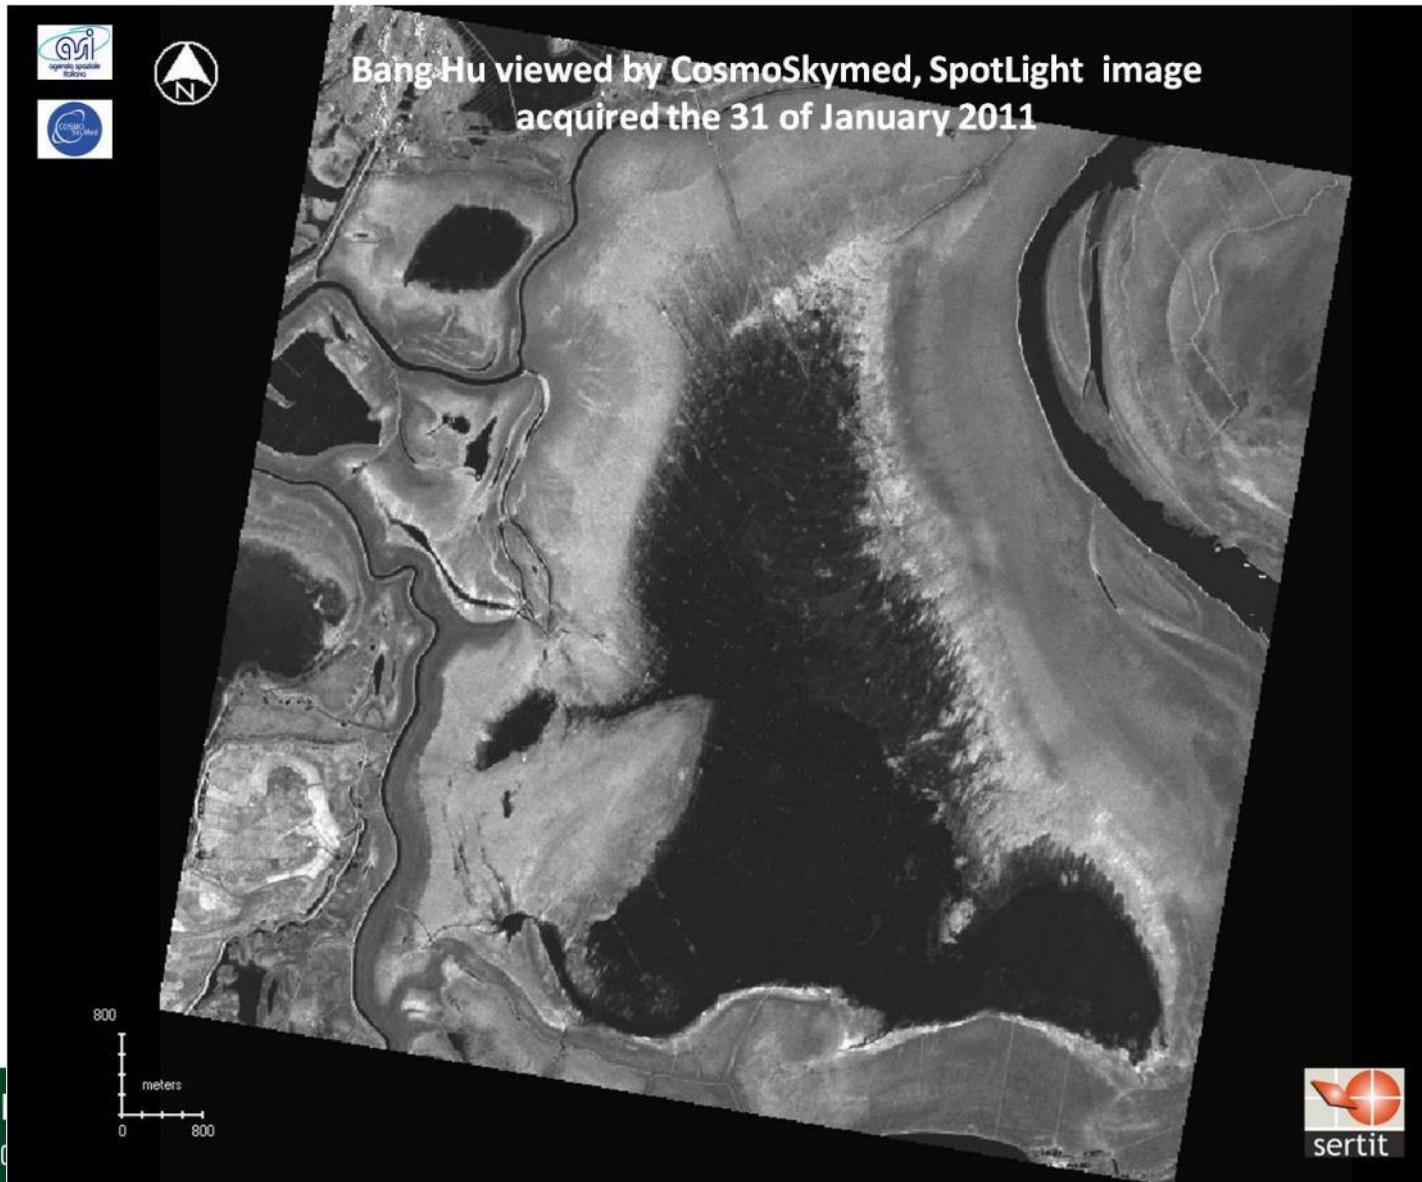


Water bodies mapping based on Cosmo Skymed Data: Poyang lake China



**Fish traps on Bang Hu
viewed by
CosmoSkymed,
SpotLight image
acquired the 31 of
January 2011**




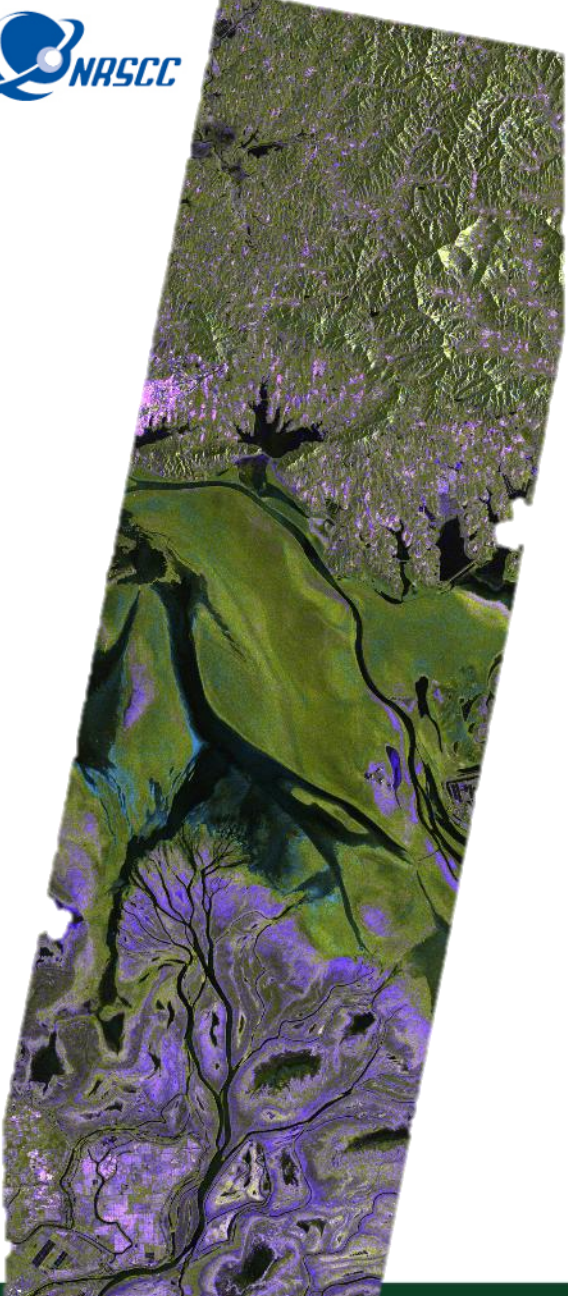


Water bodies mapping based on Tandem X INSAR






Water bodies mapping based on Tandem X INSAR

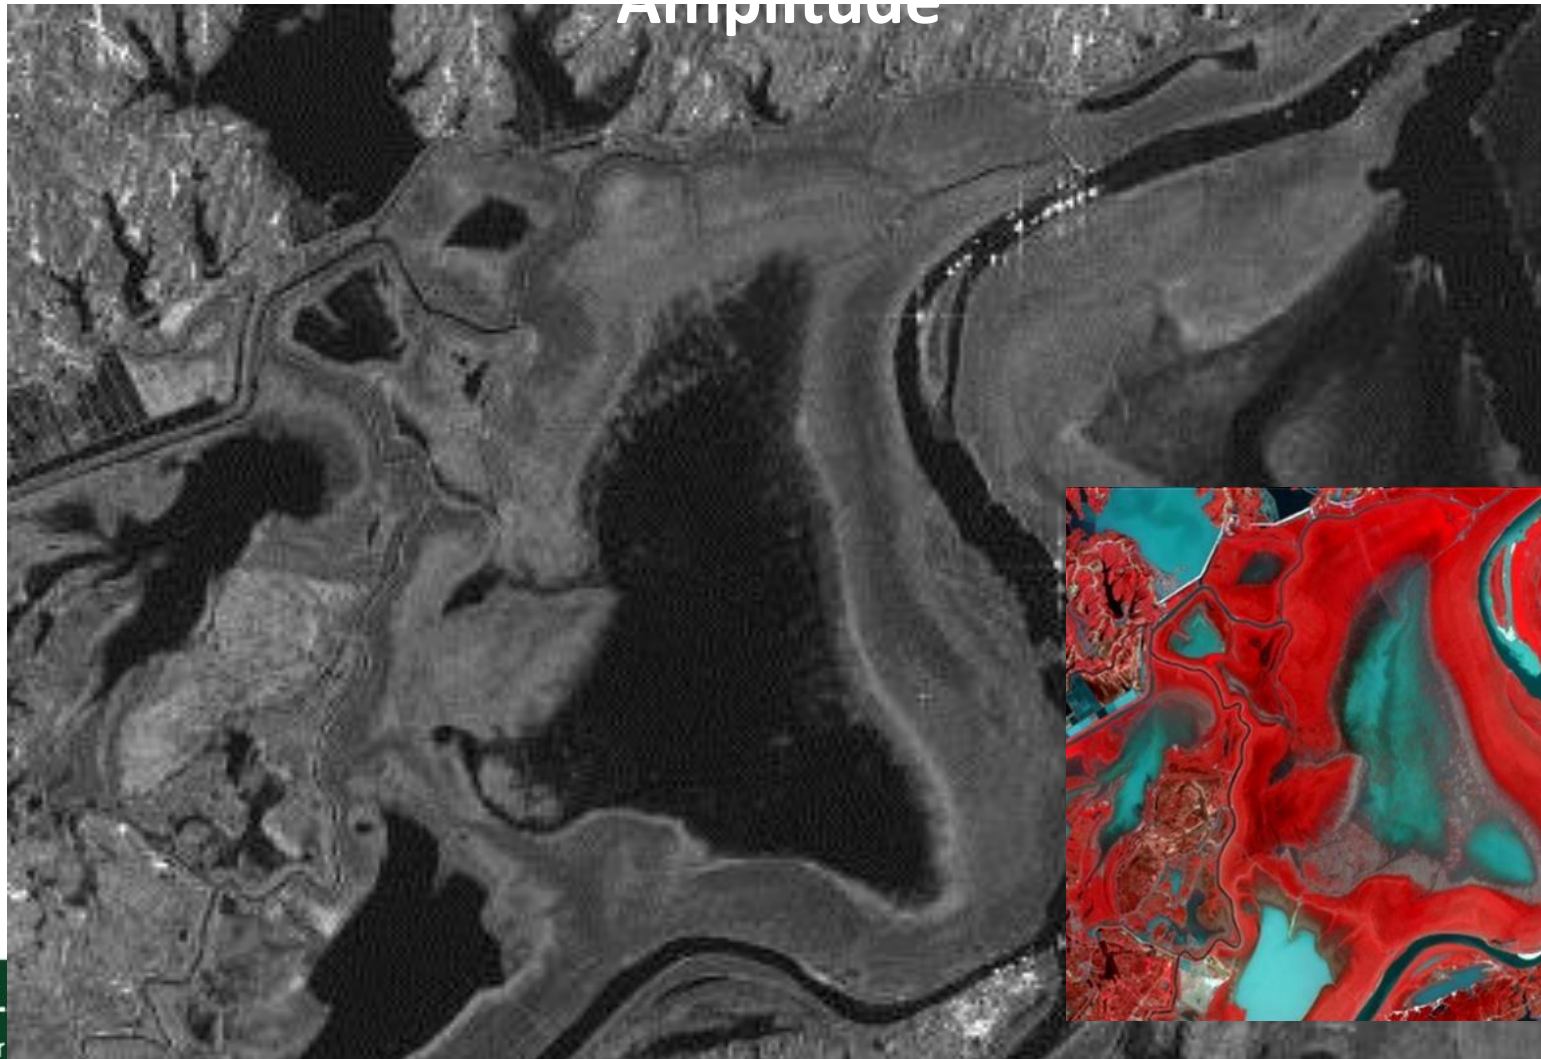


Water bodies mapping based on Tandem X INSAR Cohérence

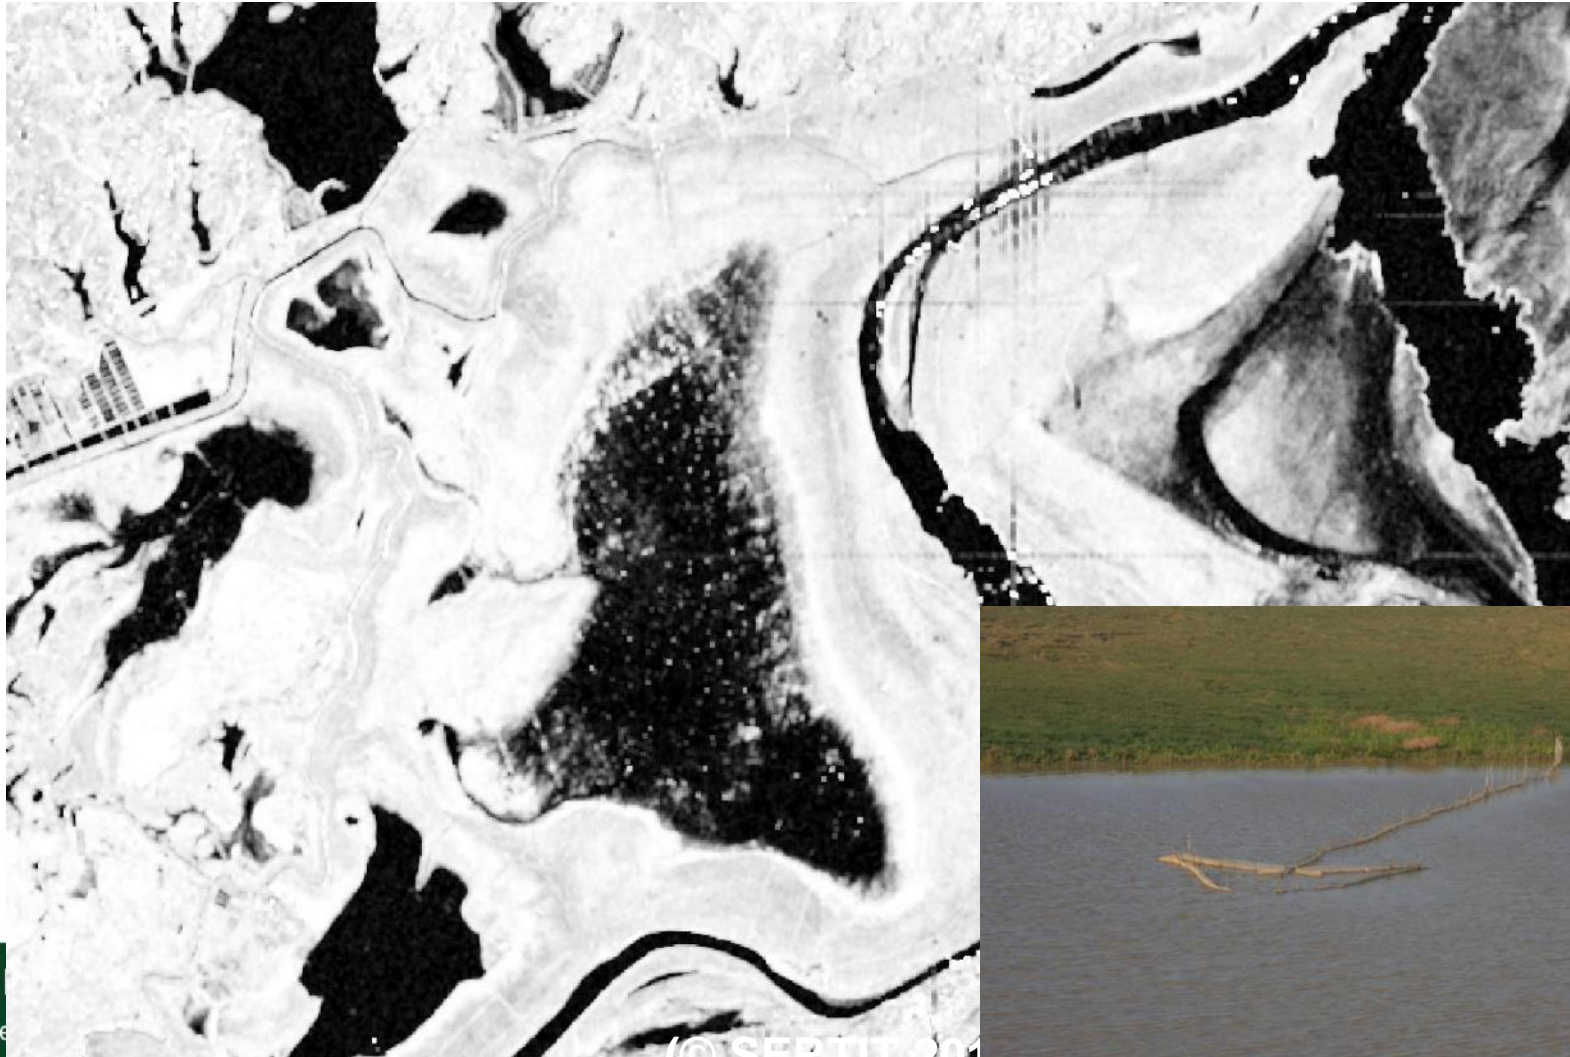


Water bodies mapping based on Tandem X INSAR Amplitude

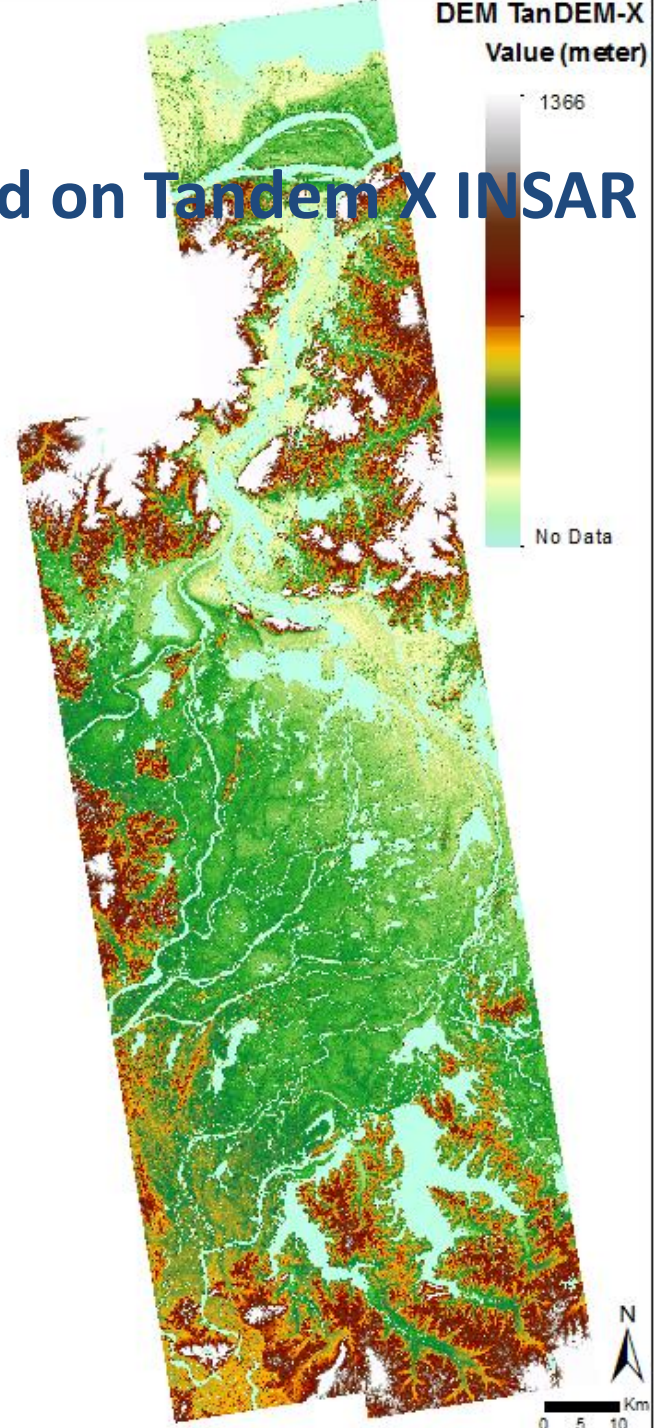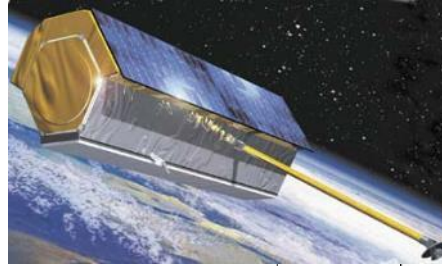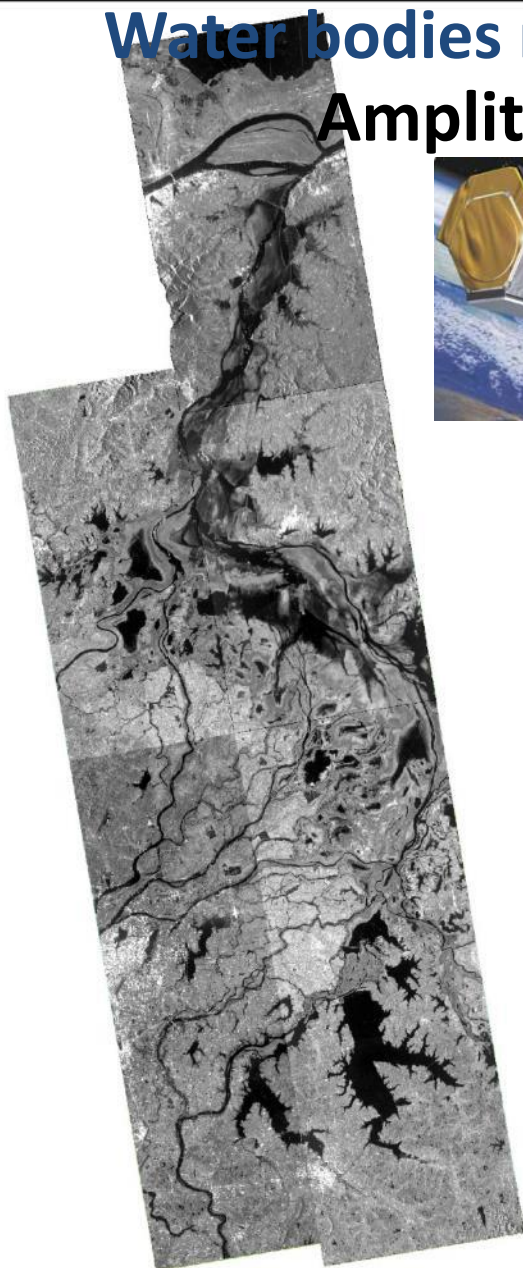

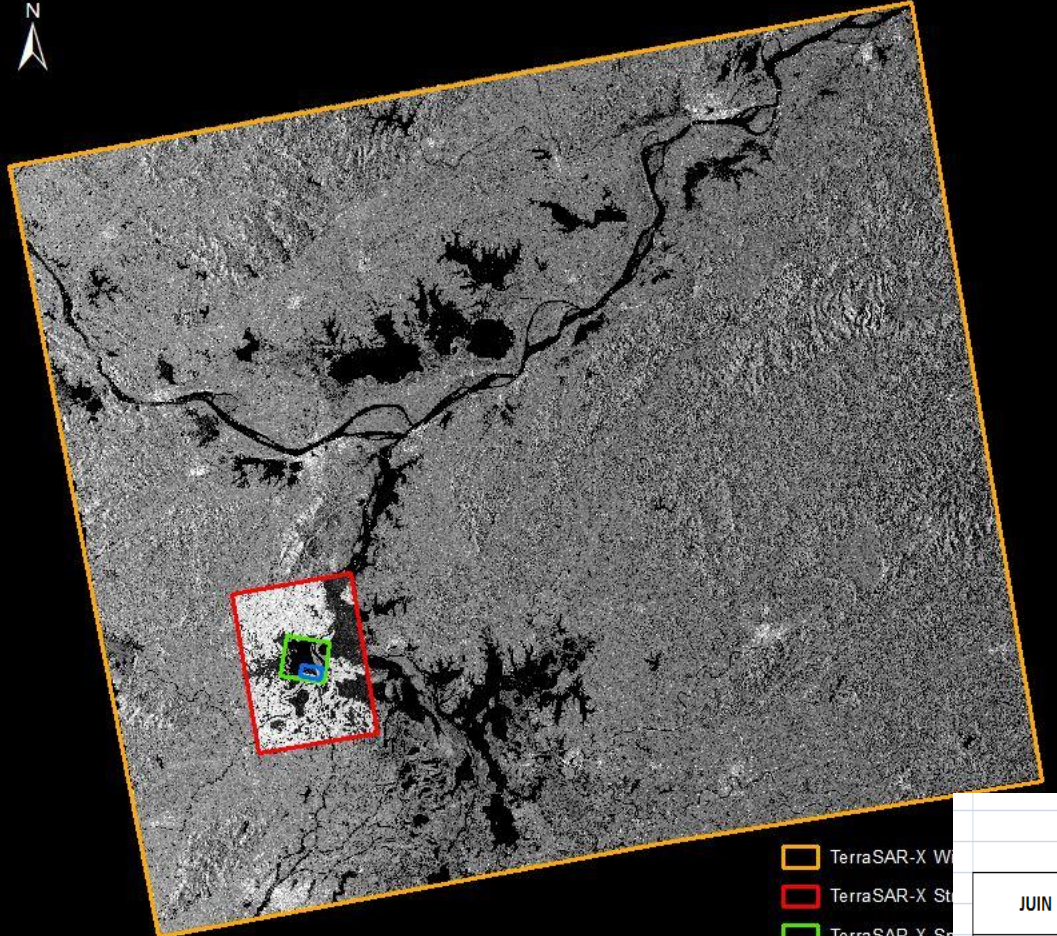

Muti resolution approach exploiting TerraSAR New modes


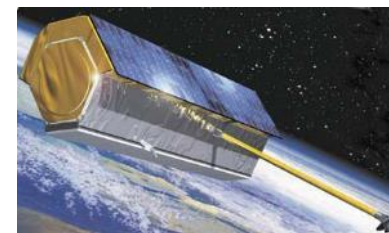


- TerraSAR-X W
- TerraSAR-X St
- TerraSAR-X Sp
- TerraSAR-X St



0 25 50 km

Wide Scan SAR 200*200 km², 30 m
Strip Map mode : 30*50 km², 3m
SpotLight mode : 5*10 km², 1m
Staring SpotLight : 3*4 km², 25 cm

		CHINE				
		WSC	SM	SL	ST (BANG HU)	ST (MEIXI HU)
JUN		3	8			
		25				
JUILLET				17		
NOVEMBRE		15	20	19		13
				30		
DÉCEMBRE		18	1		5	16
		29	12			
JANVIER		9	14	13	7	18
		31				
FÉVRIER		11	16	15	20	9
MARS		27	10	20	25	14
AVRIL			12	11	23	16
MAI			15	14		19
JUIN						

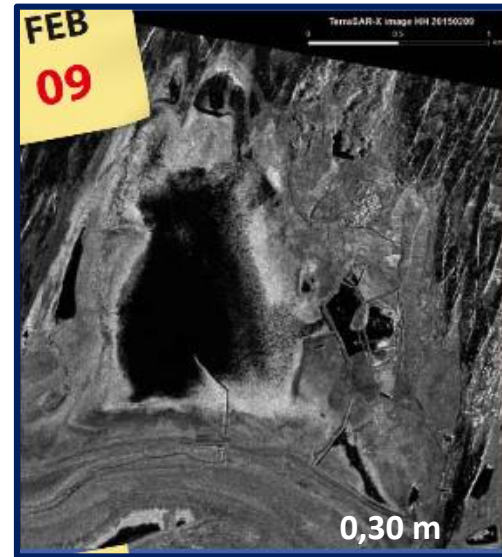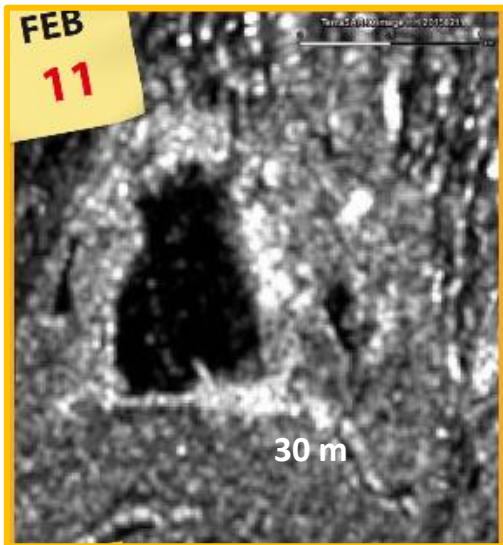


**Multi resolution
Multi-temporelle**

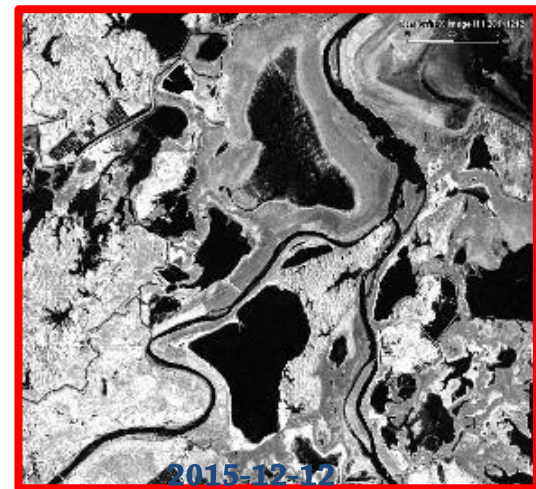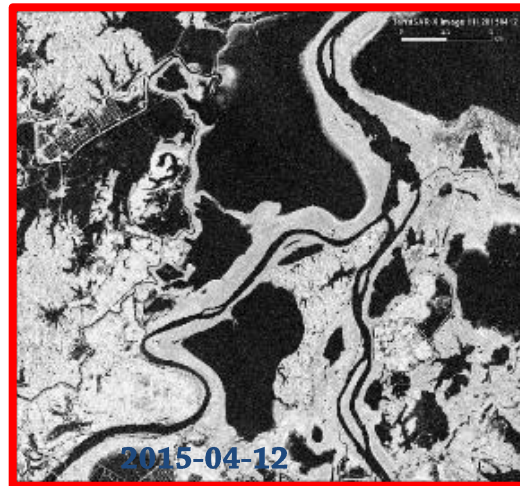

The VHR and polarimetric SAR: Radarsat

C band : Radarsat II: Canadian, left right looking
 Launch: 14-12-07 C

- High resol mode, 3m band
- Full polarimetric mode (scientific)

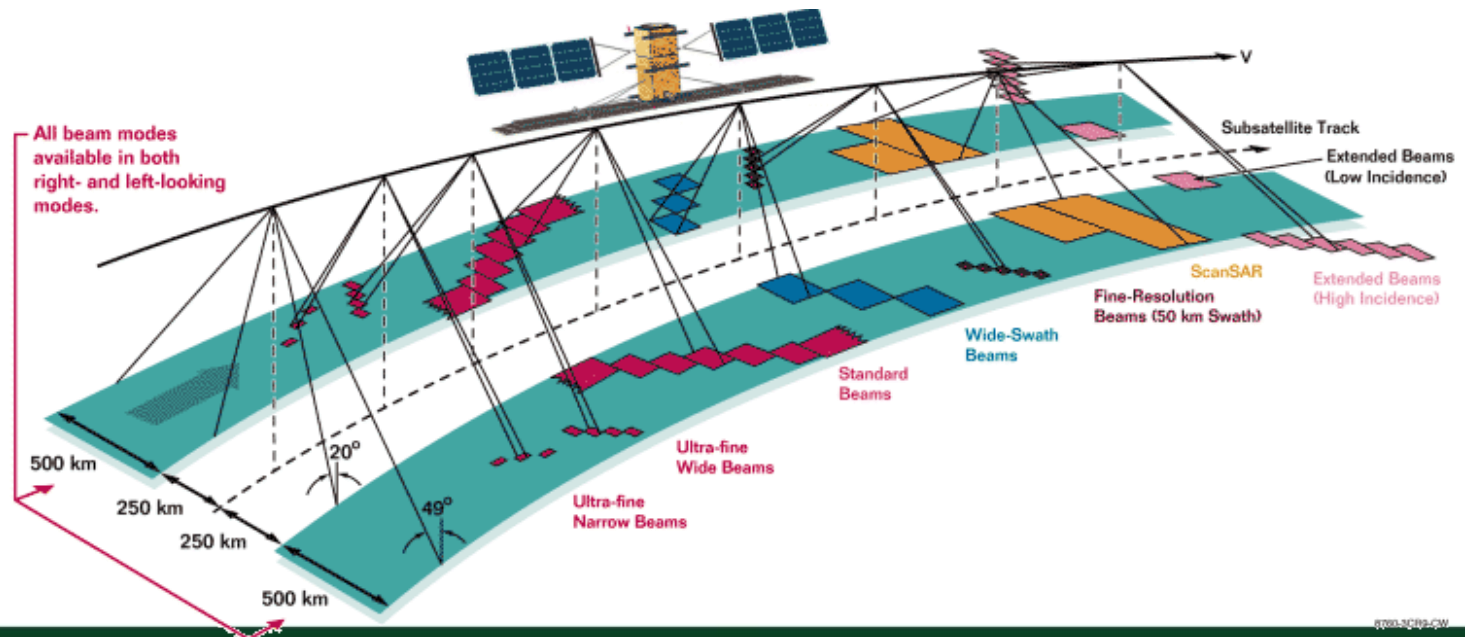

Exploitation of VHR SAR: Radarsat II

Nargis typhoon Myanmar



Exploitation of VHR SAR: Radarsat II

Nargis typhoon Myanmar



Radarsat
Ultrafine mode
: 3 m

Lot of details
within rural
areas




Exploitation of VHR SAR: Radarsat II

Nargis typhoon Myanmar



Exploitation of VHR SAR: Radarsat II

Nargis typhoon Myanmar

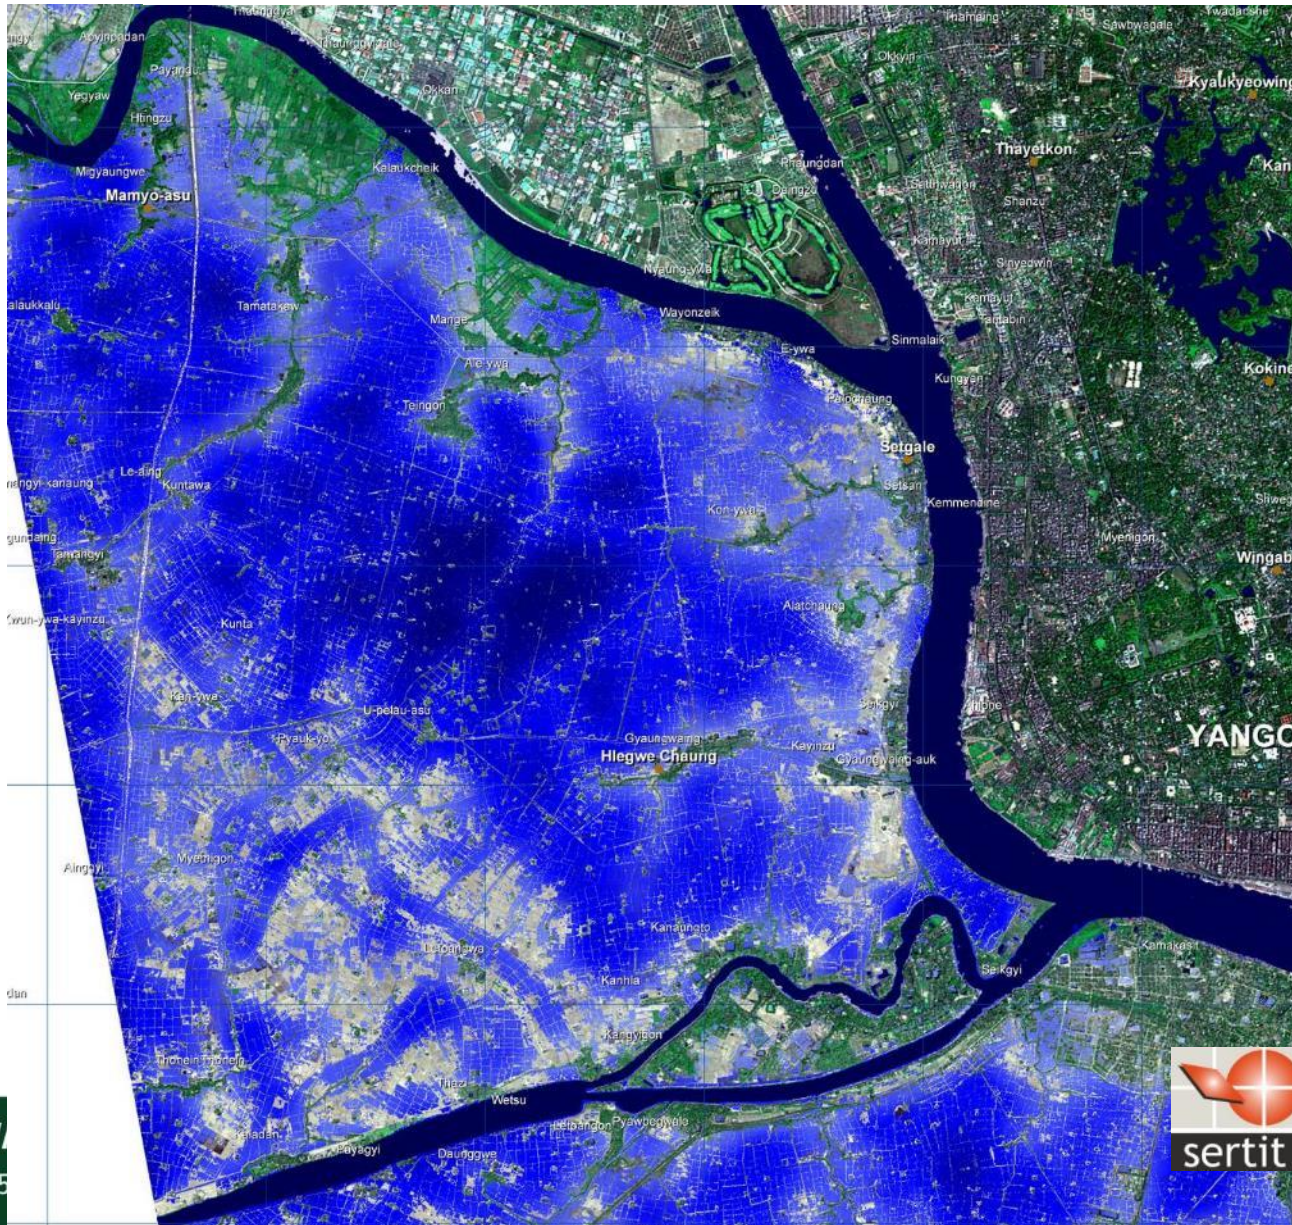

Fine resolution allowed to derive a very innovative information from a single crisis image

Relative water depth



Deep

Shallow



Exploitation of the polarimetric information based on the entropy (valuable technics in natural/Agricultural landscape)

Remember E. Pottier presentation

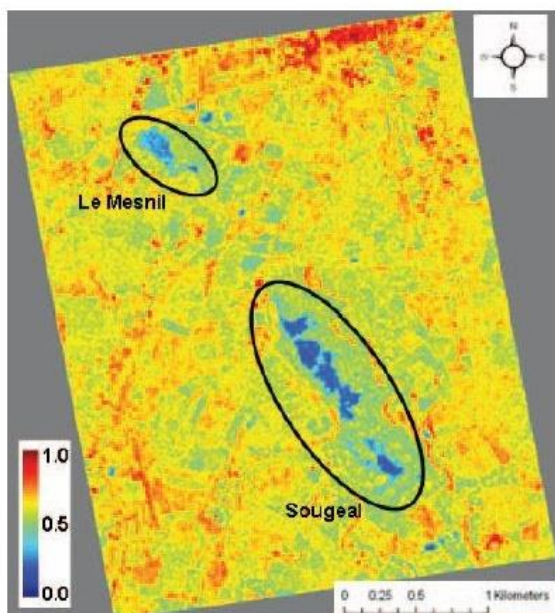


Figure 3- The normalized Shannon Entropy (SE) image.

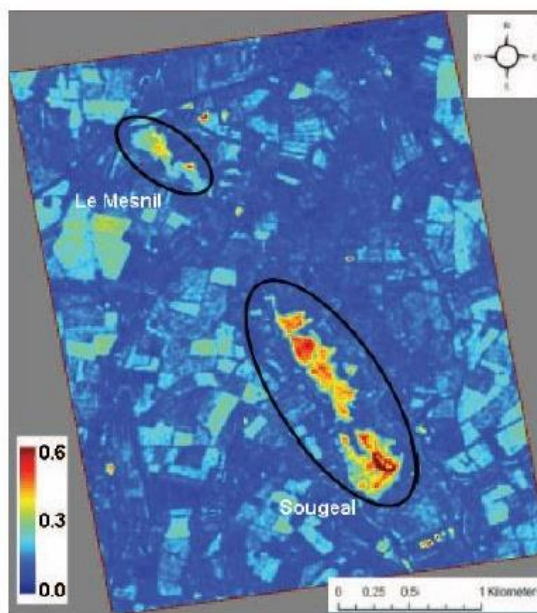


Figure 4- Temporal coefficient of variation of the SE parameter

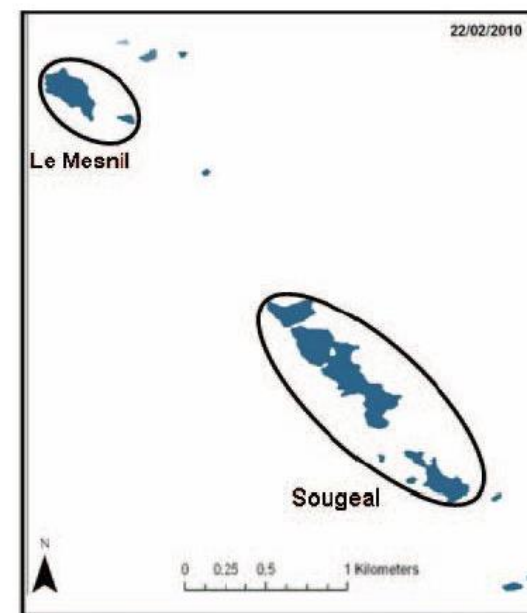


Figure 5- The segmented SE image with the open water in blue

From Maréchal, Pottier et al., Igarss 2011; Pottier et al., Igarss Munich 2012



Advanced Land Observing Satellite (ALOS II) PALSAR

- L Band
- Phased Array type L-band Synthetic Aperture Radar (**PALSAR**)
- Left/right looking
- WS to ultra fine (490 to 25km => 60 m to 1m)

- 24 May 2014



Advanced Land Observing Satellite (ALOS II) PALSAR

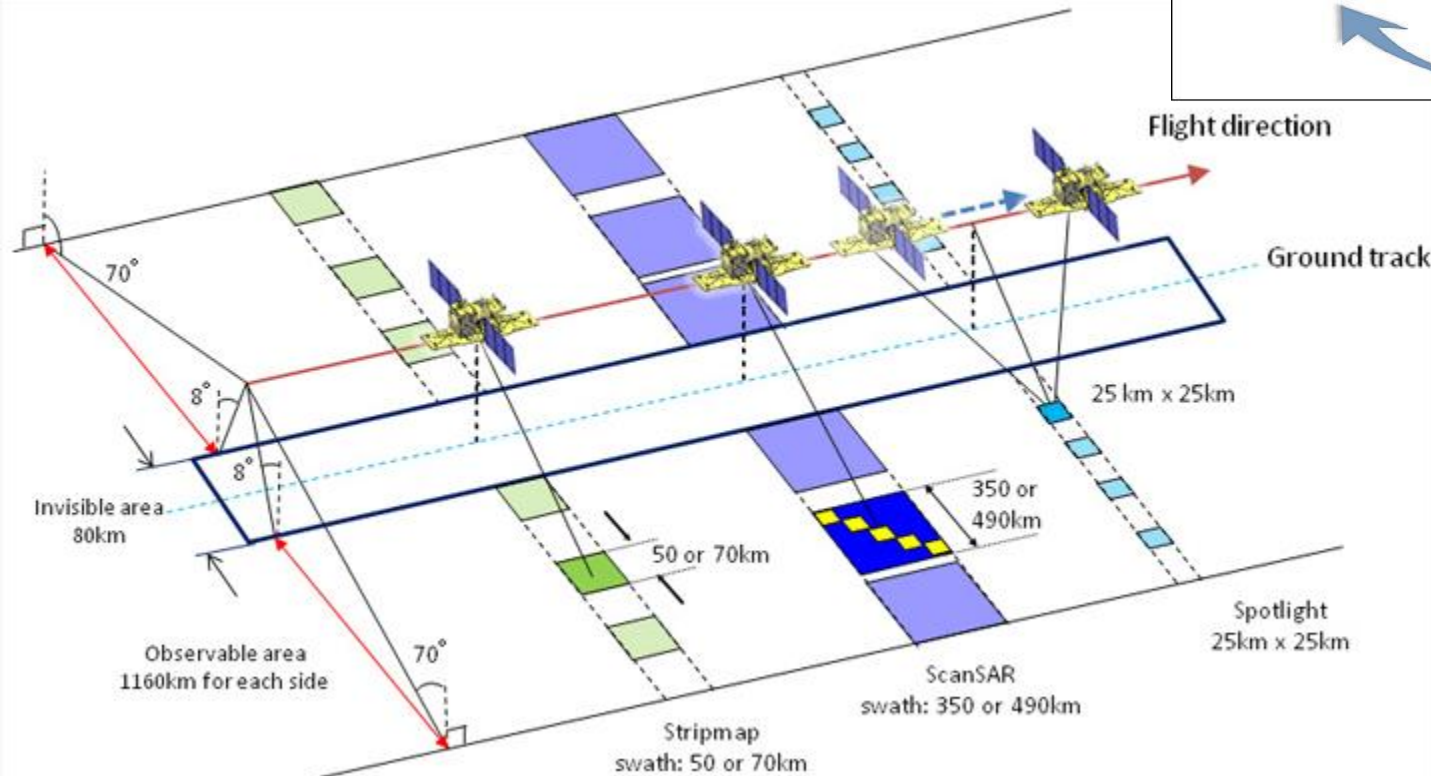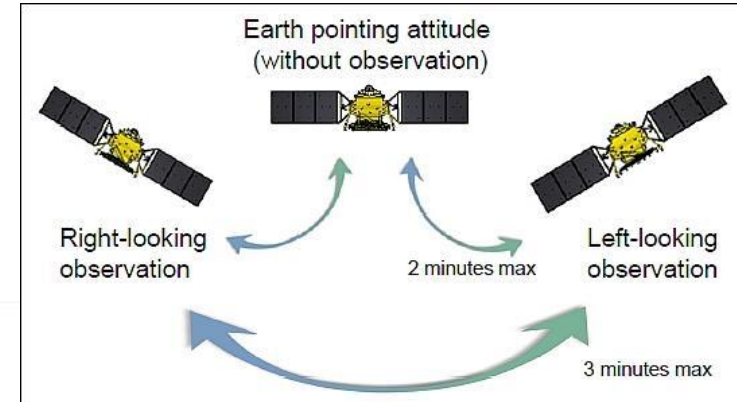




Advanced Land Observing Satellite (ALOS II) PALSAR

Observation mode	Spotlight	Stripmap					ScanSAR		
		Ultrafine [3m]	High sensitive [6m]		Fine [10m]		Normal	Wide	
Bandwidth (MHz)	84	84	42		28		14	28	14
Resolution (m)	3×1 (Rg×Az)	3	6		10		100 (3 looks)		60
Incidence angle (deg.)	8 - 70	8 - 70	8 - 70	20 - 40	8 - 70	23.7	8 - 70		8 - 70
Swath (km)	25×25 (Rg×Az)	50	50	40	70	30	350 (5 scans)		490 (7 scans)
Polarization*	SP	SP/DP	SP/DP/CP	FP	SP/DP/CP	FP	SP/DP		SP/DP
NESZ (dB)	-24	-24	-28	-25	-26	-23	-26		
S/A (dB)	Rg	25	25	23	23	25	20	25	
	Az	20	25	20	20	23			



* SP: HH or HV or VV, DP: HH+HV or VV+VH, FP: HH+HV+VH+VV, CP: compact pol. (experimental)

ALOS 2
2015-09-30

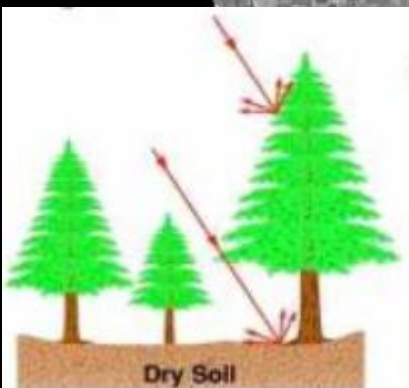
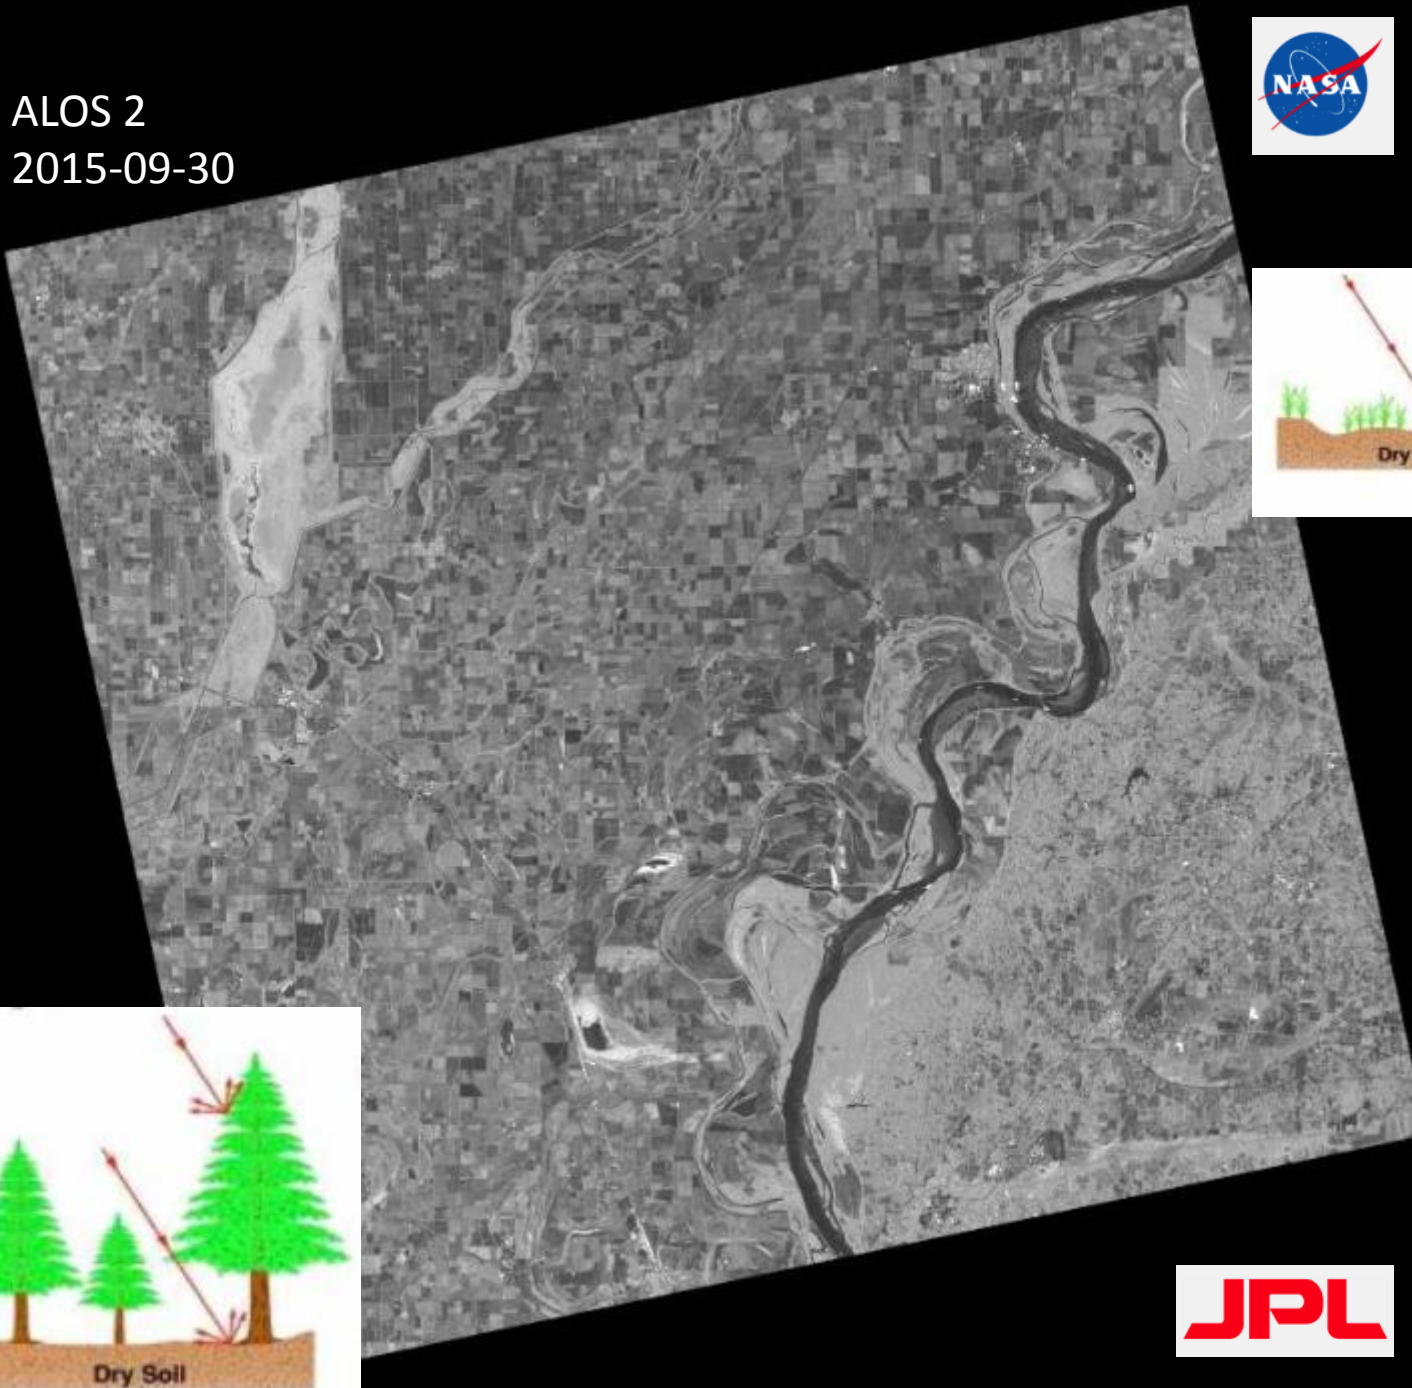


ALOS 2
2016-01-06

Flooded area under or with tall vegetation


Potentially flooded area

Potentially flooded area

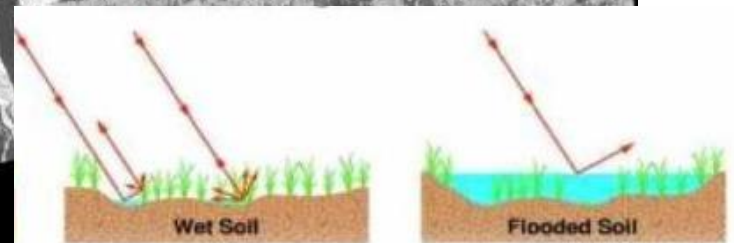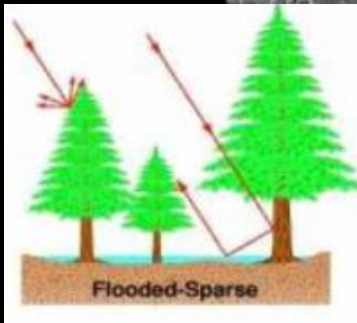

GAOFENG 3


- C band
- Full Pol SAR
- 12 imaging modes WS to ultra fine mode with corresponding swath ranging from 650 km to 10 km
- 09 August 2016

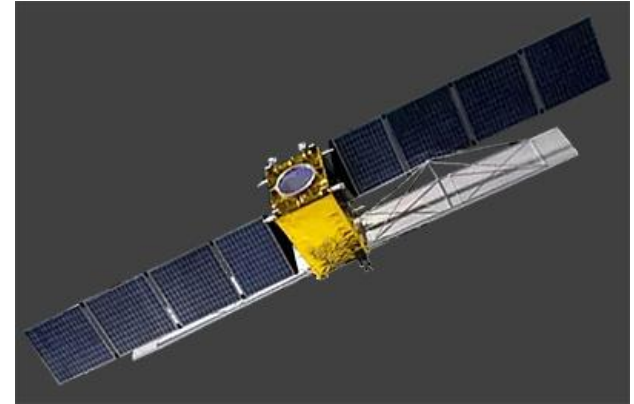

Coming SAR missions

- **2017- 2018** : Radarsat Constellation Mission (RCM) , C Band, Singl, Dual, Hybrid Pol, Revisit 4 days

- Italian-Argentine System of Satellites for Emergency Management ([SIASGE](#)) constellation.

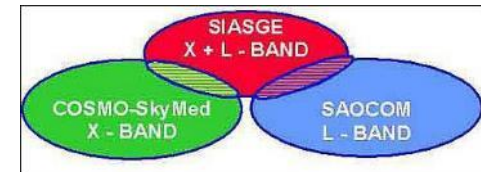

- **2018-2019** : SAOCOM de la Conae, L band (Singl, Dual Twin Pol, revisit 4 days) two satellites A & B
- **2018- 2019** : COSMO SkyMed Second Generation , CSG (X band Sing/Dual/Quad Pol)

- **2021** : BIOMASS P band, not suitable for flood/lake mapping too coarse resolution (interest for DEM under forest)
- **2021** : NISAR , indo american mission, bande L et S


COSMO SKYMED SECOND GENERATION

Fleet of 3 satellites (small platform)


Gradual implementation with two launches separated by 16 months

First launch expected Q3 2018

4-day Coherent Change Detection using SAR interferometry

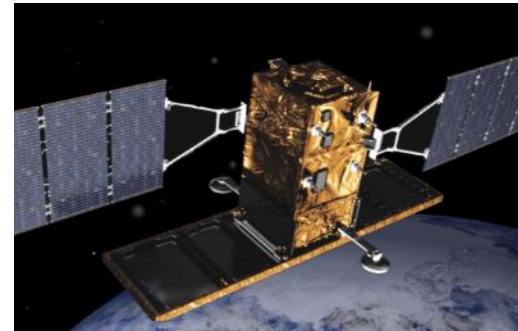

COSMO SKYMED SECOND GENERATION

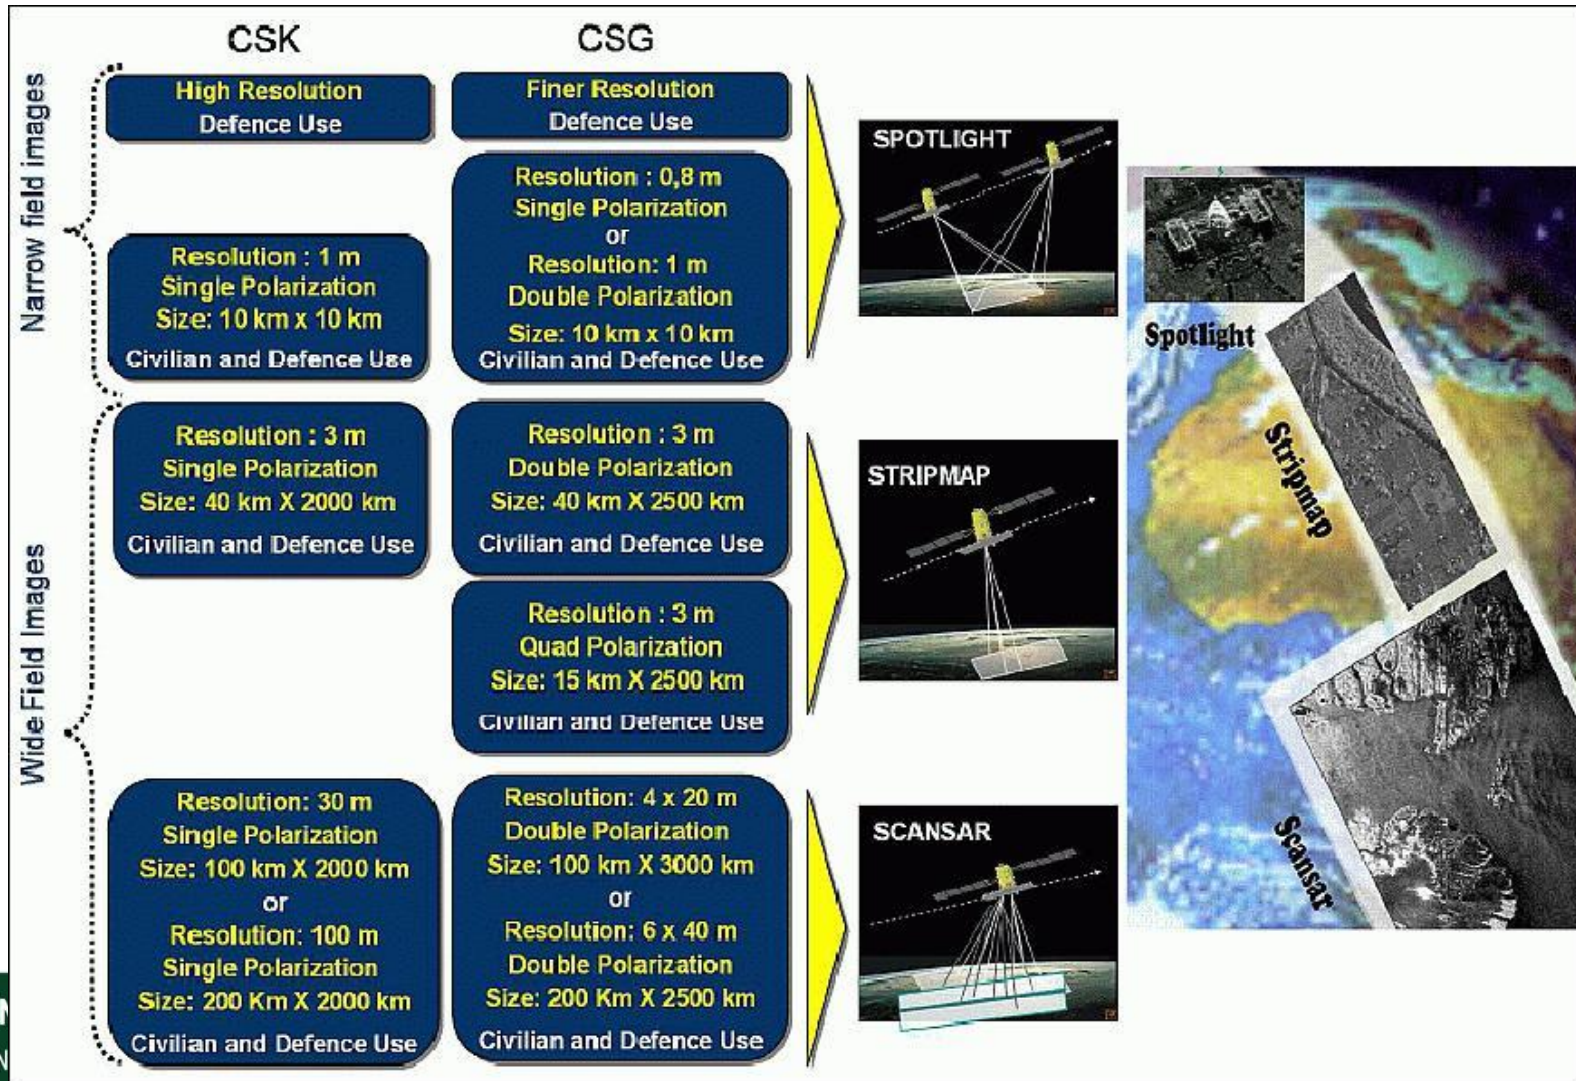

COSMO SKYMED SECOND GENERATION

Mode category	Acquisition technique	Resolution (rg x az)	Swath (rg x az)	Polarization	User type
Narrow field image	Spotlight				Defense
		0.8 m x 0.8 m	10 km x 10 km	Single polarization	
		1.0 m x 1.0 m	10 km x 10 km	Double polarization	
Wide field image	Stripmap	3.0 m x 3.0 m	40 km x 2500 km	Double polarization	Civilian and Defense
		5.0 m x 20 m	30 km x 2500 km	Burst double polarization	
		3.0 m x 3.0 m	15 km x 2500 km	Quadruple polarization	
	ScanSAR	4.0 m x 20 m	100 km x 2500 km	Double polarization	
		6.0 m x 20 m	200 km x 2500 km	Double polarization	


Radarsat Mission Constellation, RMC

Fleet of 3 satellites (small platform)

Gradual implementation with two launches separated by 16 months

First launch expected Q3 2018

4-day Coherent Change Detection using SAR interferometry


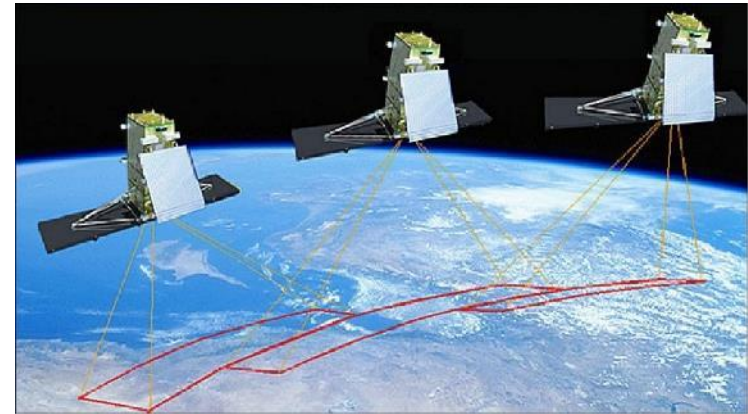


Radarsat Mission Constellation, RMC

Multi mode

Full Pol

RADARSAT Constellation

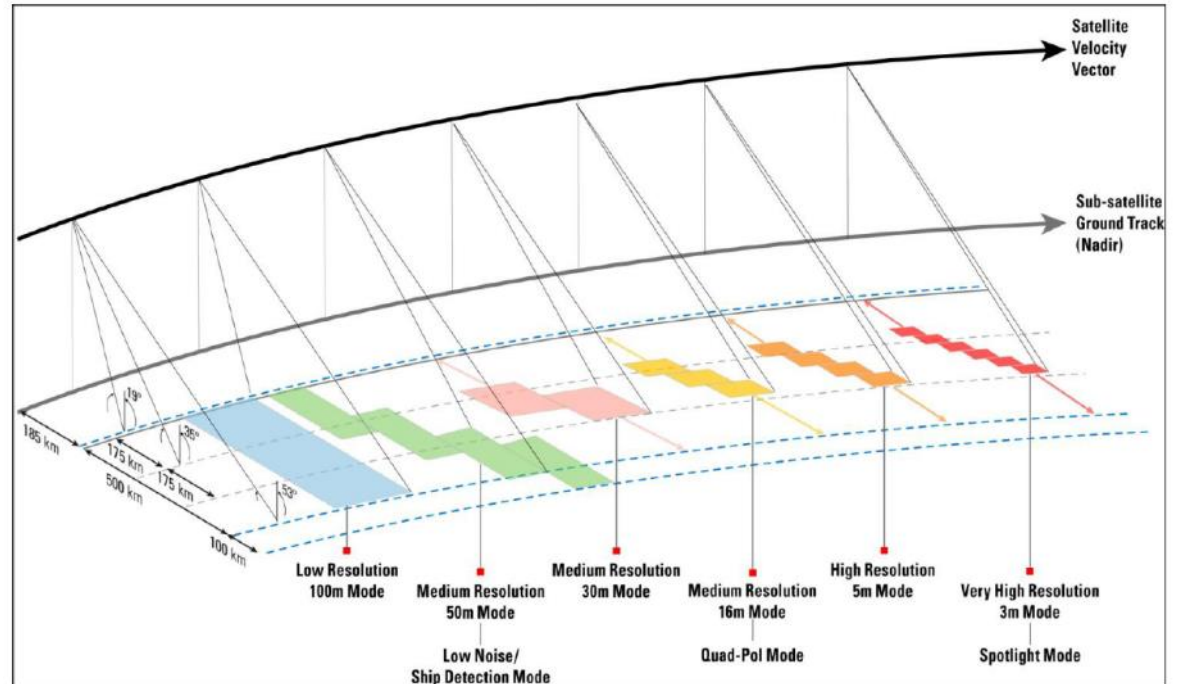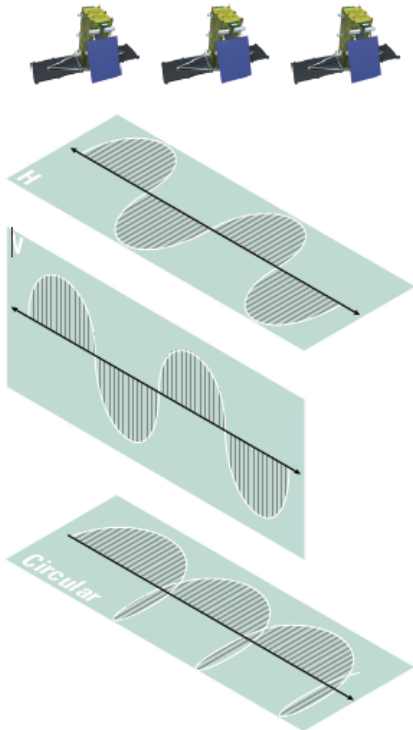

Radarsat Mission Constellation, RMC

Multi mode

Mode	Nom. Res. m	Num Looks rng x az	Nominal Swath Width (accessible) km	Min Along Track Length km	Nominal NESZ dB	Polarization Options								
						Single Pol				Dual Pol				Quad Pol
						HH	VV	HV	VH	HH+HV	VV+VH	HH+VV	Compact	HH+VV+HV+VH
Low Resolution 100m	100	8x1	500 (500)	10	-22	✓	✓	✓	✓	✓	✓	✓	✓	
Medium Resolution 50m	50	4x1	350 (500)	10	-22	✓	✓	✓	✓	✓	✓	✓	✓	
Medium Resolution 16m	16	1x4	30 (350)	10	-25	✓	✓	✓	✓	✓	✓	✓	✓	
Medium Resolution 30m	30	2x2	125 (350)	10	-24	✓	✓	✓	✓	✓	✓	✓	✓	
High Resolution 5m	5	1	30 (500)	10	-19	✓	✓	✓	✓	✓	✓	✓	✓	
Very High Resolution 3m	3 @35°	1	20 (500)	10	-17	✓	✓	✓	✓	✓	✓	✓	✓	
Low Noise	100	4x2	350 (500)	10	-25	✓	✓	✓	✓	✓	✓		✓	
Ship Detection	var.	var.	350 (600)	10	var.	✓	✓	✓	✓	✓	✓		✓	
Quad-Polarization	NR ¹	NR ¹	> 20 (NR ¹)	10	NR ¹									✓
Spotlight	1 (az) x 3 (grd) @35°	1	20 (350)	5	-17	✓	✓	✓	✓	✓	✓		✓	

Presentation outline

Introduction: Why water bodies and flood mapping and monitoring

Flood and lakes in the landscape

Short cut of Physical basis for Water bodies mapping

Elements for water bodies extraction based on SAR imagery

SAR sensors for water bodies and/or flood mapping

- Past mission
- On going missions
- Future missions

Flood plain and lakes monitoring

- **Short term Monitoring**
- **Long term monitoring**
- **Meteo climato parameters**

Concluding remarks

long term monitoring of flood prone/lakes

Multisensors approach

**Synergy optical - SAR ie MERIS/ASAR
or CSK/HJ1 or Deimos**

Great expect into the sentinel 1 and 2

Worldwide applicable for large systems but also smallest areas:

Asia : China, Mekong system (Tonle sap lake and Delta),




Africa: Niger iner delta, Okavango, etc

Australia: Eyre Lake and Diamanta River


South America: Argentina, Rio del Plata

Complementarity/synergy Optical / Radar

High Resolution Optical Image

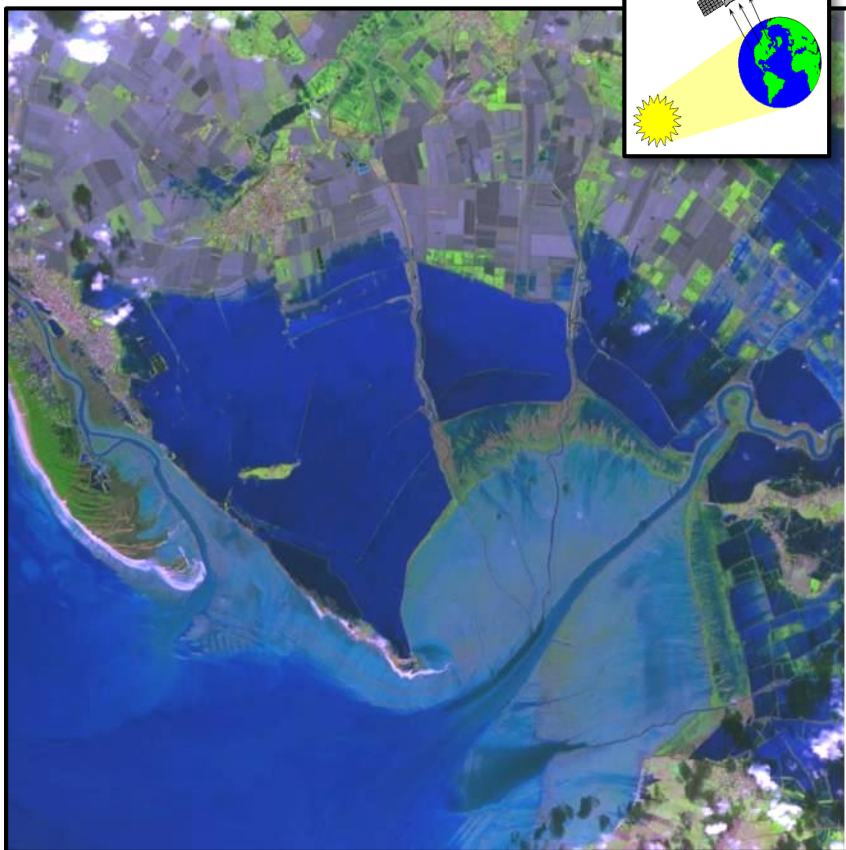

High Resolution Radar Image

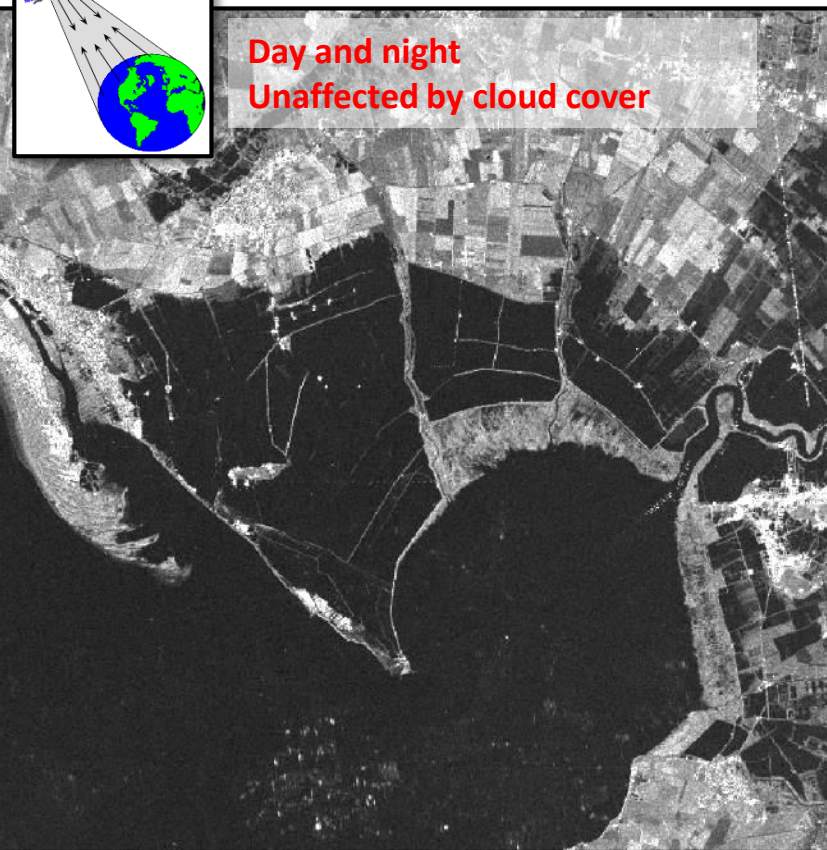


Day and night
Unaffected by cloud cover

Very High Resolution
Optical Image

Very High Resolution
Radar Image and polarimetry

Sentinel2

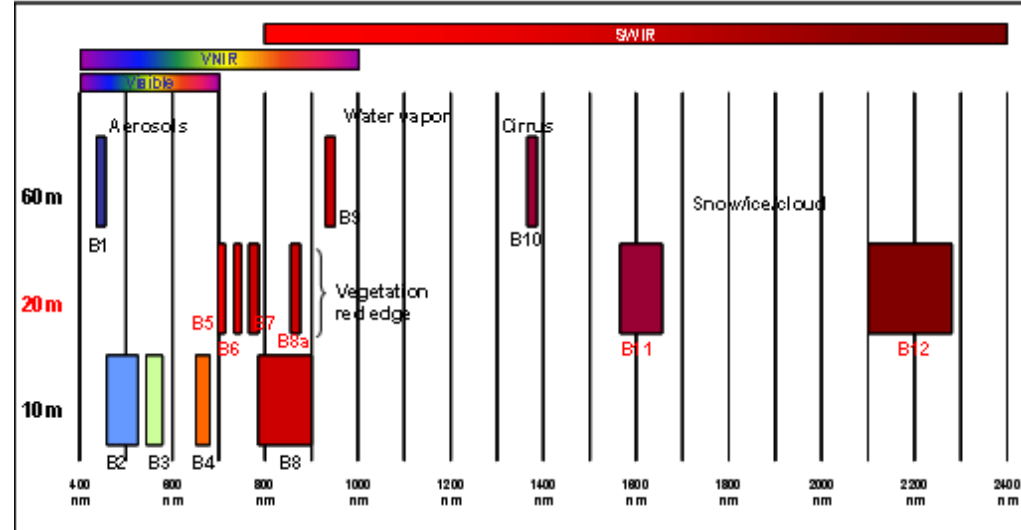

Sentinel 2

- Highest Resolution same as SPOT5 (10m)
- Presence of two SWIR bands (heritage of landsat)
- Large swath (MERIS heritage)
- Revisiting time 10 – 5 days



Sentinel 2

- Resolution depending of the spectral coverage

10 metre spatial resolution:

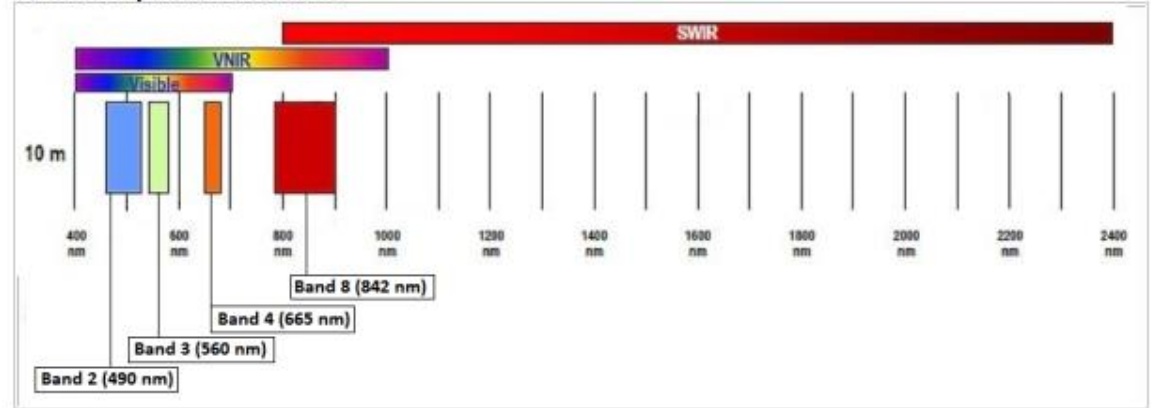


Figure 1: SENTINEL-2 10 m spatial resolution bands: B2 (490 nm), B3 (560 nm), B4 (665 nm) and B8 (842 nm)

20 metre spatial resolution:

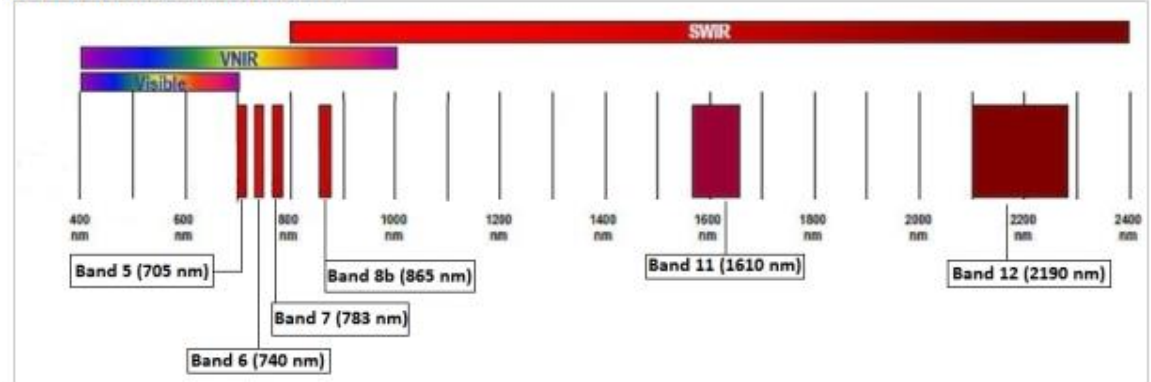


Figure 2: SENTINEL-2 20 m spatial resolution bands: B5 (705 nm), B6 (740 nm), B7 (783 nm), B8b (865 nm), B11 (1610 nm) and B12 (2190 nm)

60 metre spatial resolution:


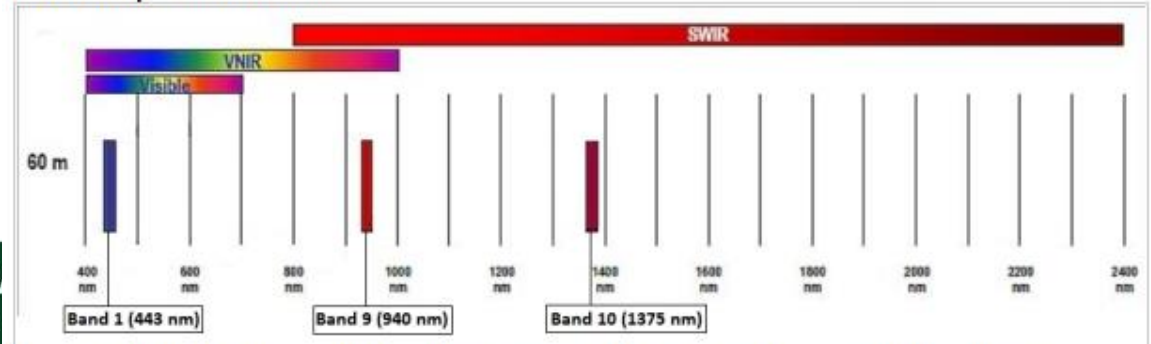


Figure 3: SENTINEL-2 60 m spatial resolution bands: B1 (443 nm), B9 (940 nm) and B10 (1375 nm)

Yangtze river's monsoons lakes monitoring

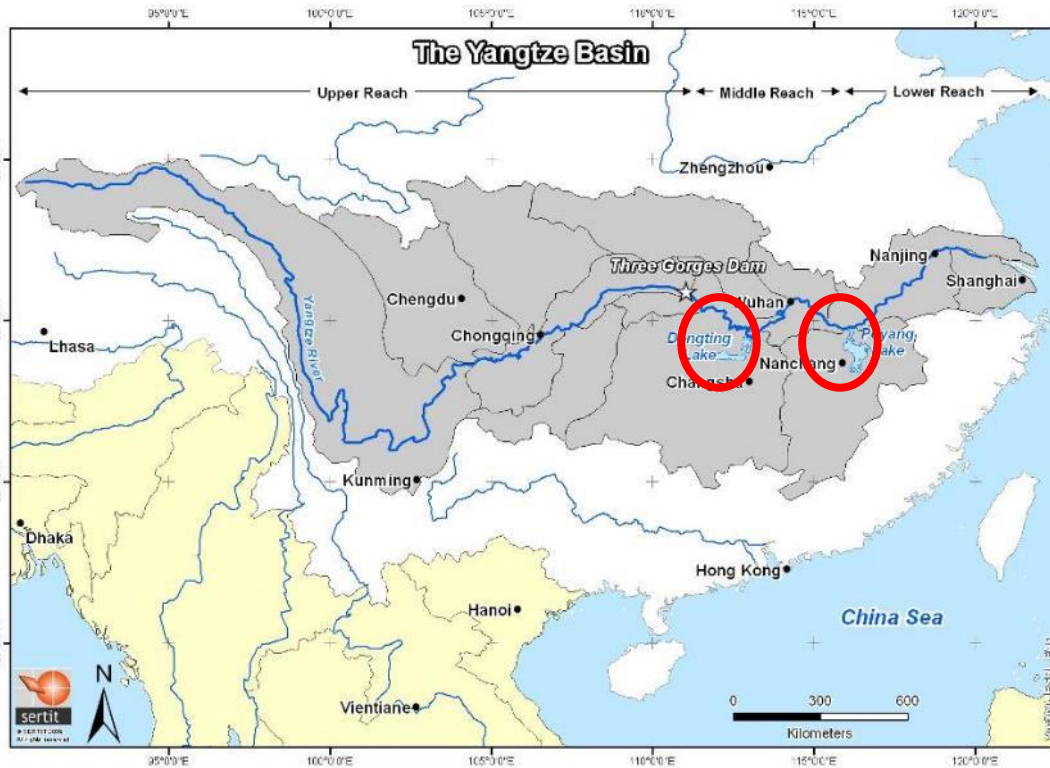


Health of Yangtze is a major concern for 400 000 000 of inhabitants as a fresh wa resource.

- 70% rice production
- 40% cereal production
- 40% industry
- Biodiversity stakes


Climate fluctuation and man activities (ie Three Gorges dam) could have significant impact.

Monsoon lake: important annual variations of water surface

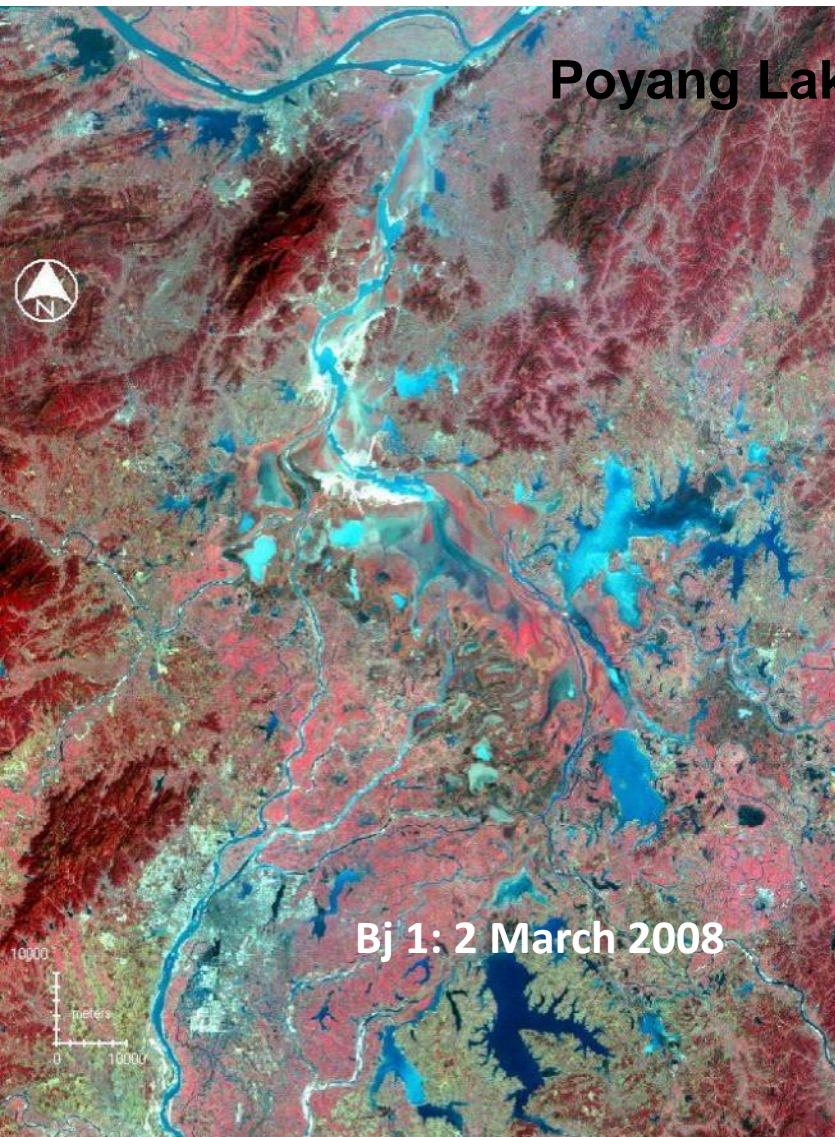


Poyang Lake, RP China

Bj 1: 2 March 2008

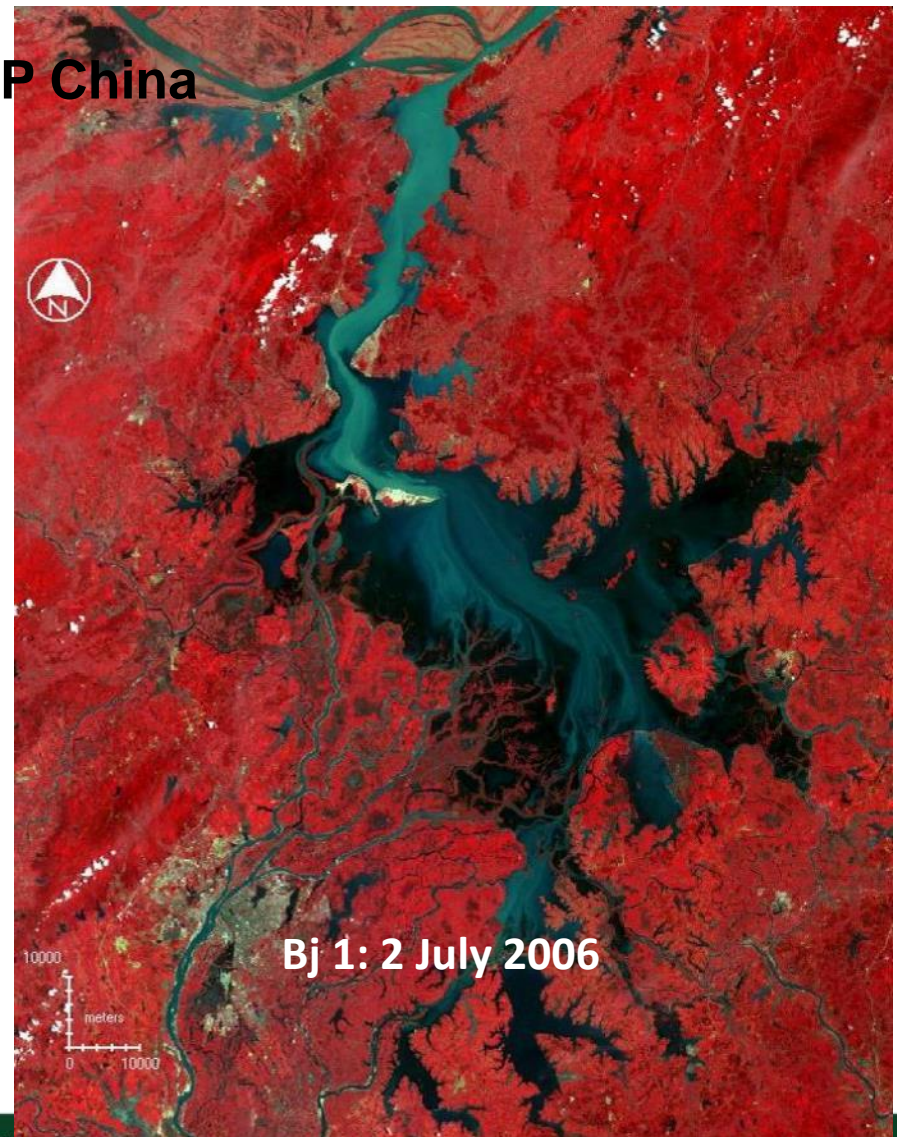

Bj 1: 2 July 2006


Example of water body monitoring: Poyang

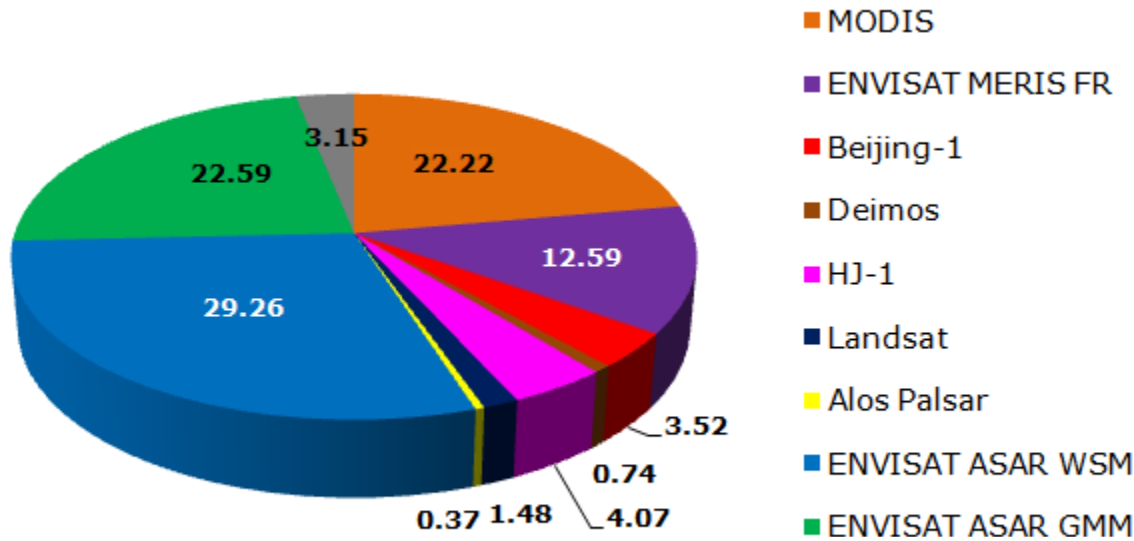


A mixed resource

In the future two major resource Sentinel 1 et 2

+550 images

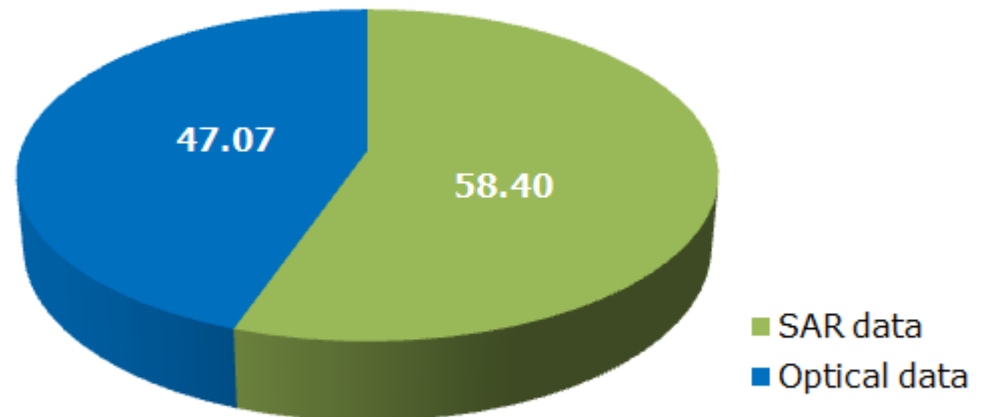

Request to a secured resource allowing to monitoring large areas with a reduced revisiting time (10 – 15 days)

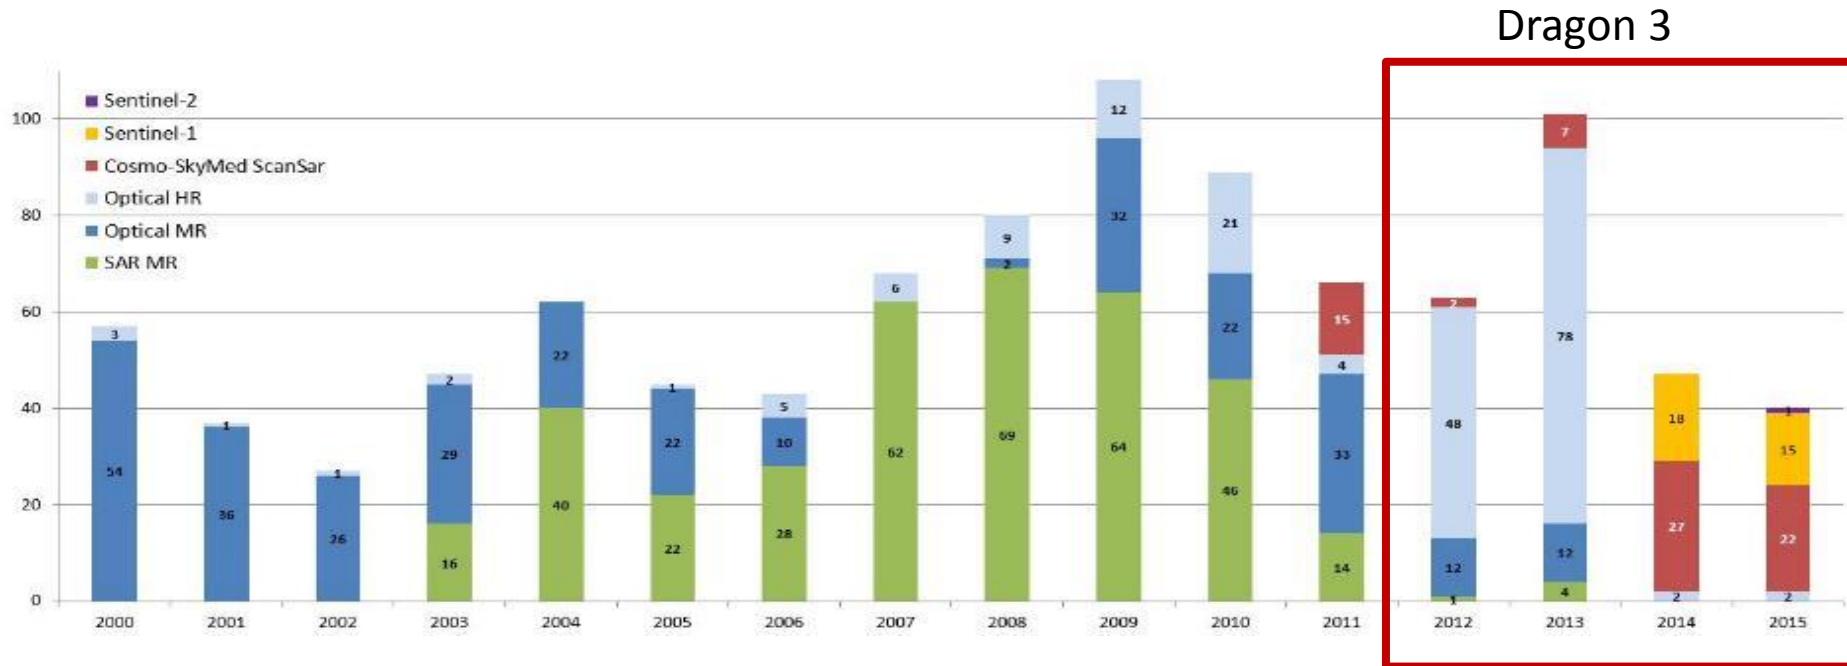

Moving from MR to HR

⇒ SPOT 4&5 TakeFive, HJ1A, preparing Sentinel 2 venue

⇒ Archive TerraSAR, New modes TerraSAR TandemX


⇒ Cosmo Skymed from ASI (supporting Envisat Gap)

⇒ Sentinel 1A

⇒ First Sentinel2


⇒ First Sentinel1B

Water extent monitoring: Poyang

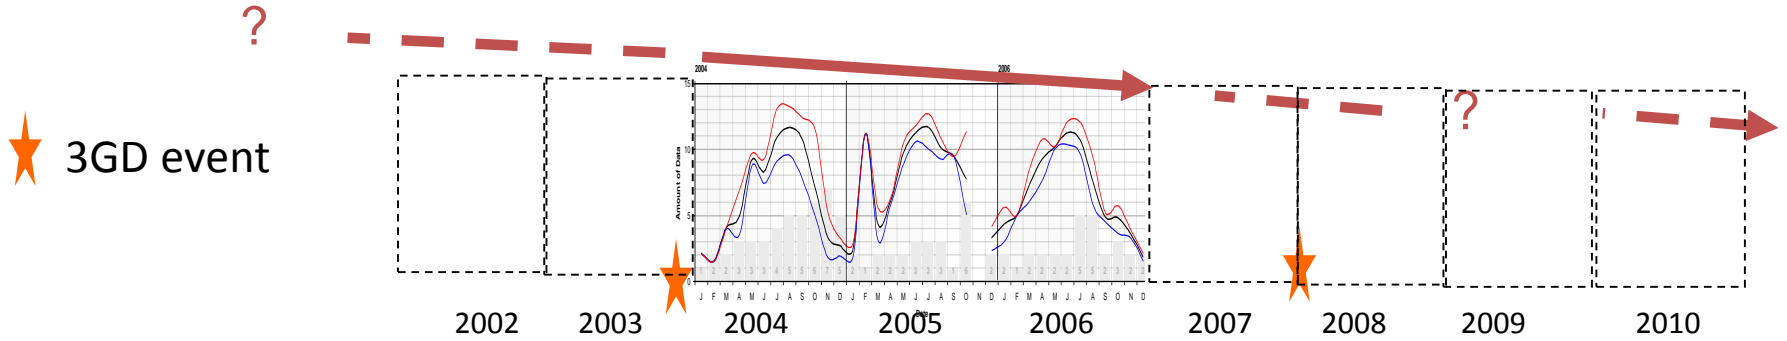


Dragon 2 objectives: Continue and complete water surfaces' monitoring

Water extent monitoring: Poyang

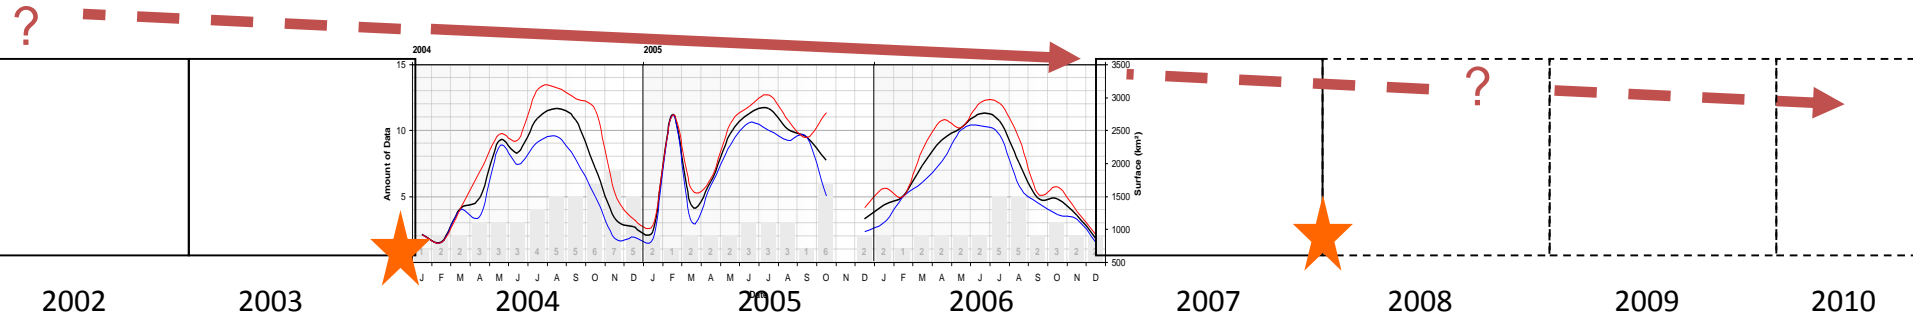


Dragon3 objectives: Continue and complete water surface monitoring

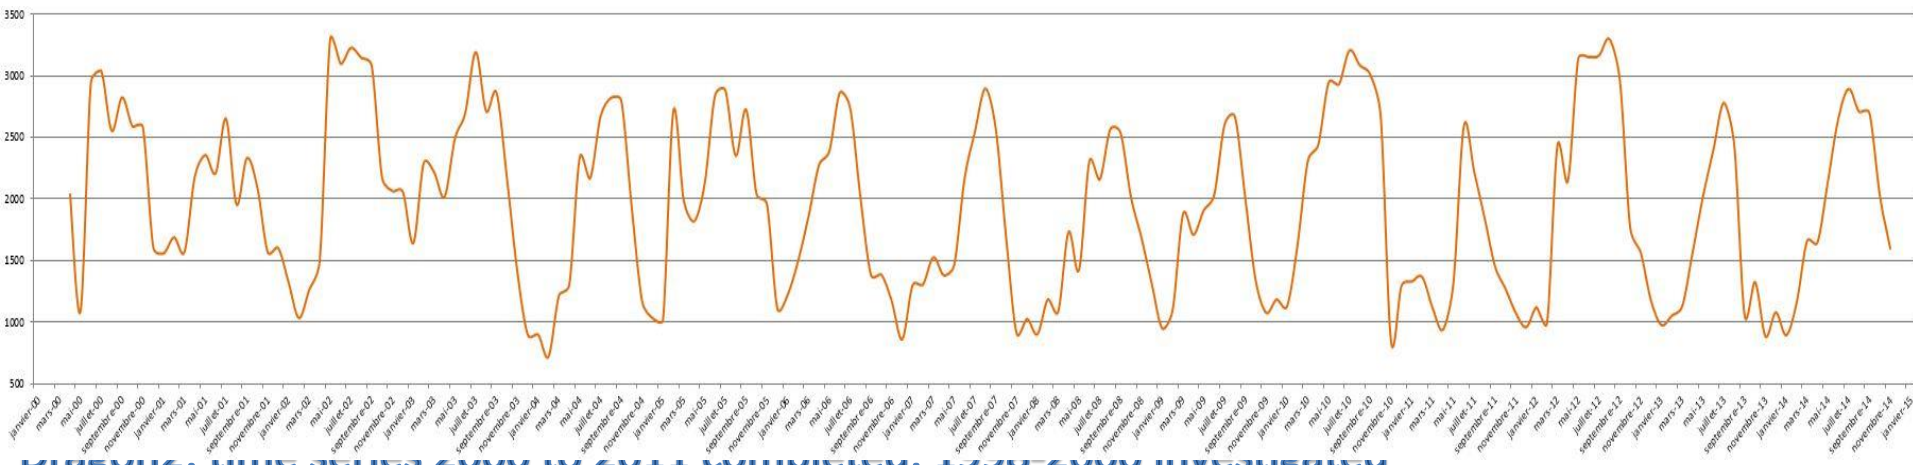


Dragon2: time series 2000 to 2011 completed, 1998-2000 investigated

Dragon 3: 2014 fully integrated

Poyang lake water surface monitoring: Regional analysis and global interactions

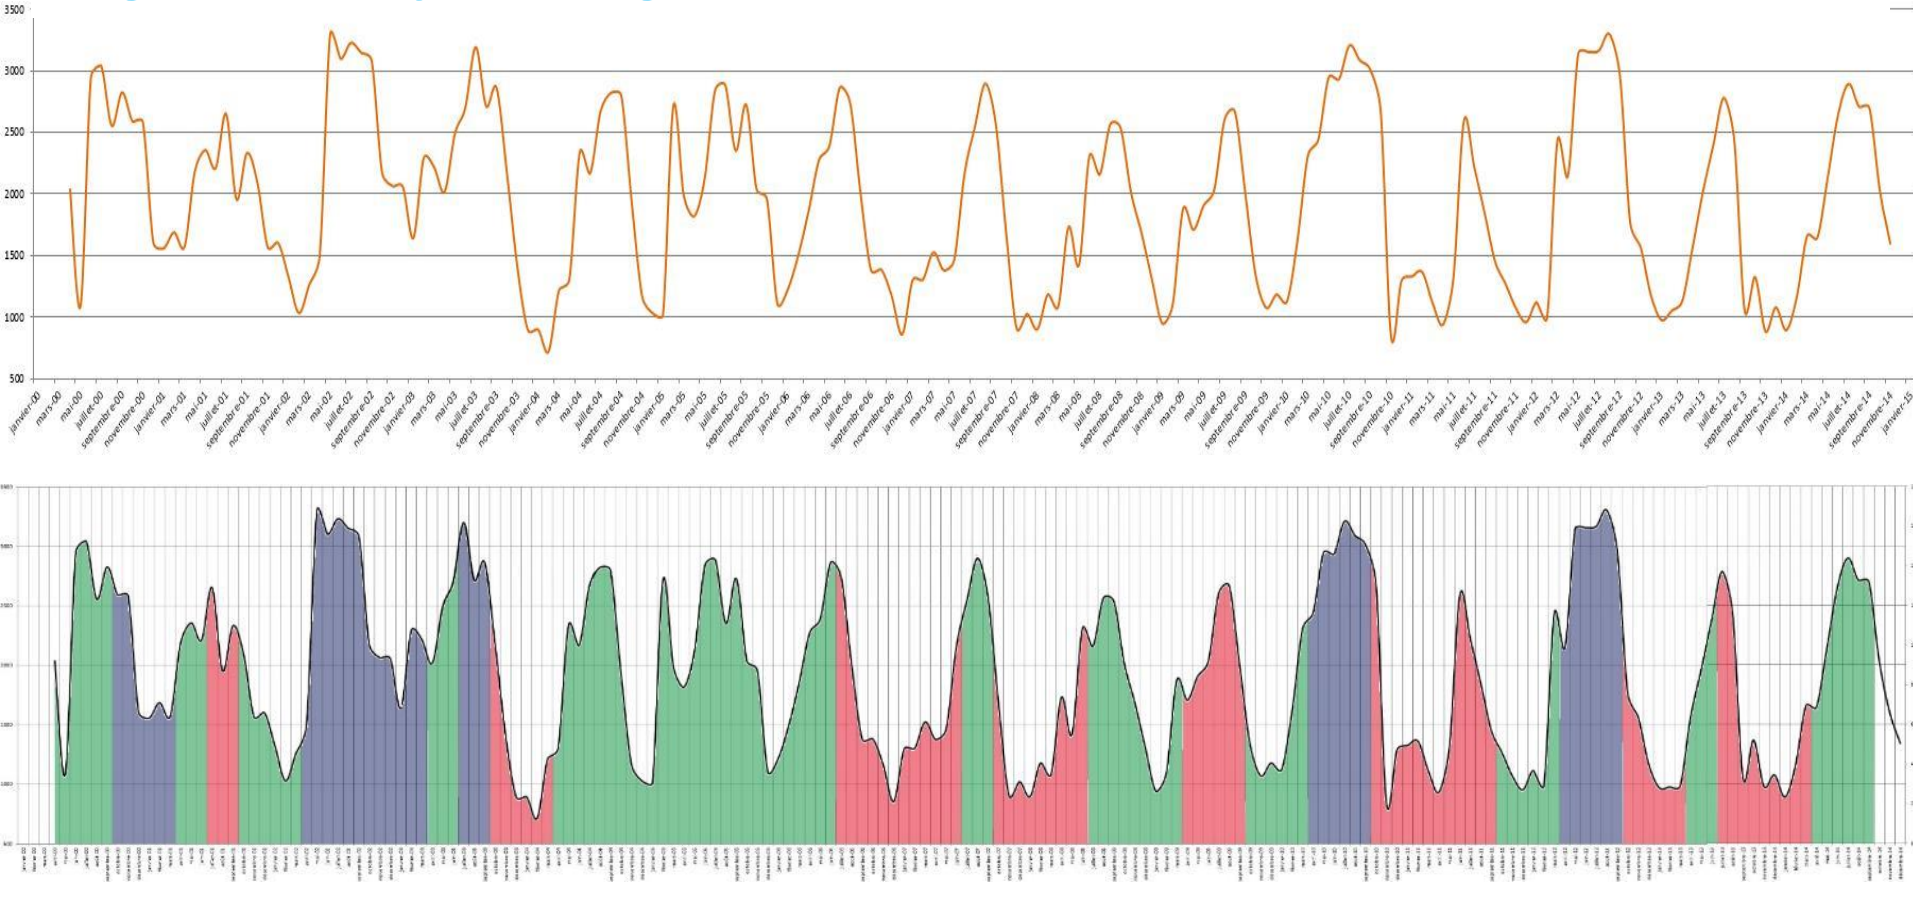

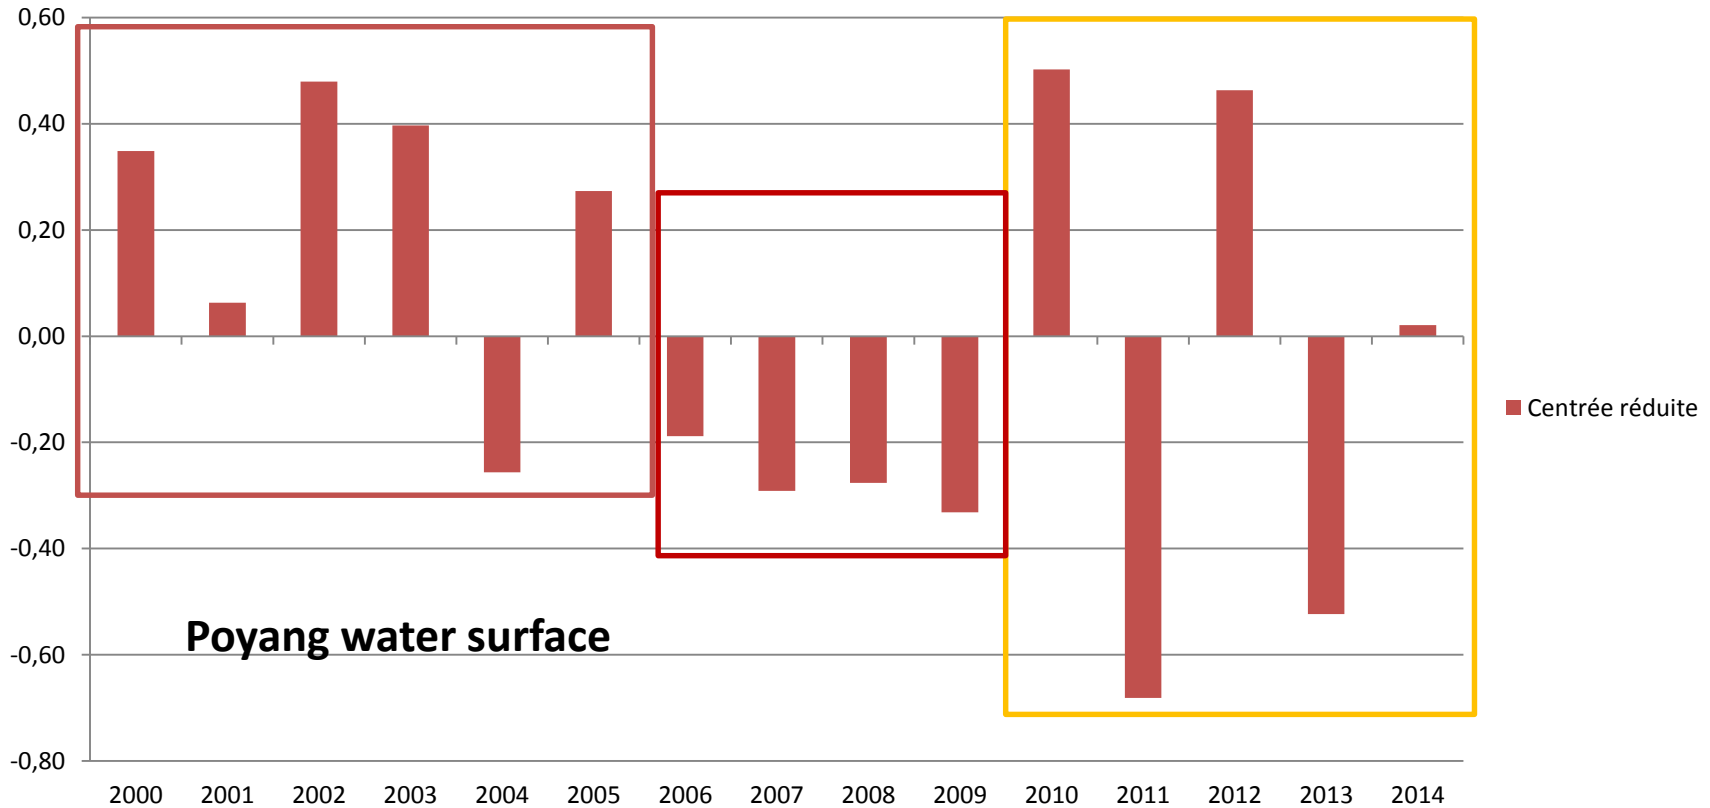


2000-2005 : positive

2006-2009 : negative


2010_2015 : variations from one extreme to another

Water surface Statistical analysis




Centred reduced

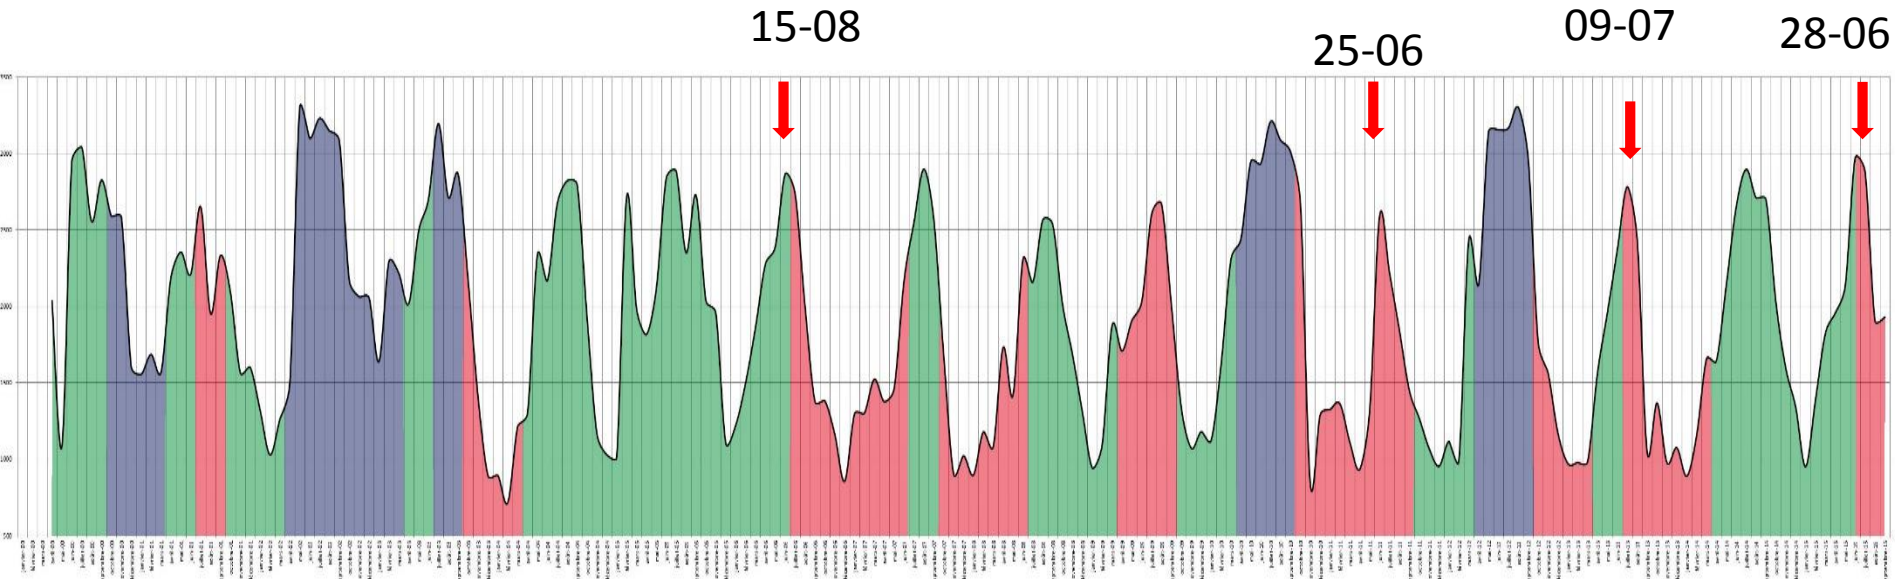

- ⇒ In literature draw off; Mid September, mid October
- ⇒ Draw off becomes very early over the years with a shortness of the inundation period
 - ⇒ First time observed in mid August 2016
 - ⇒ In 2011 very short flooding period, max in 25-06
 - ⇒ In 2013, redraw in mid-July
 - ⇒ In 2015 same behaviors, max flood extent in end of June

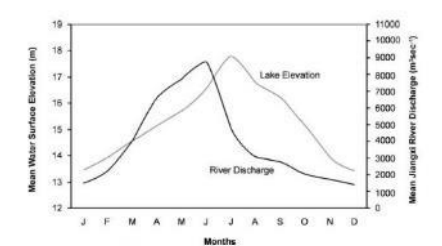


Water extent monitoring: Submersion time: residual analysis

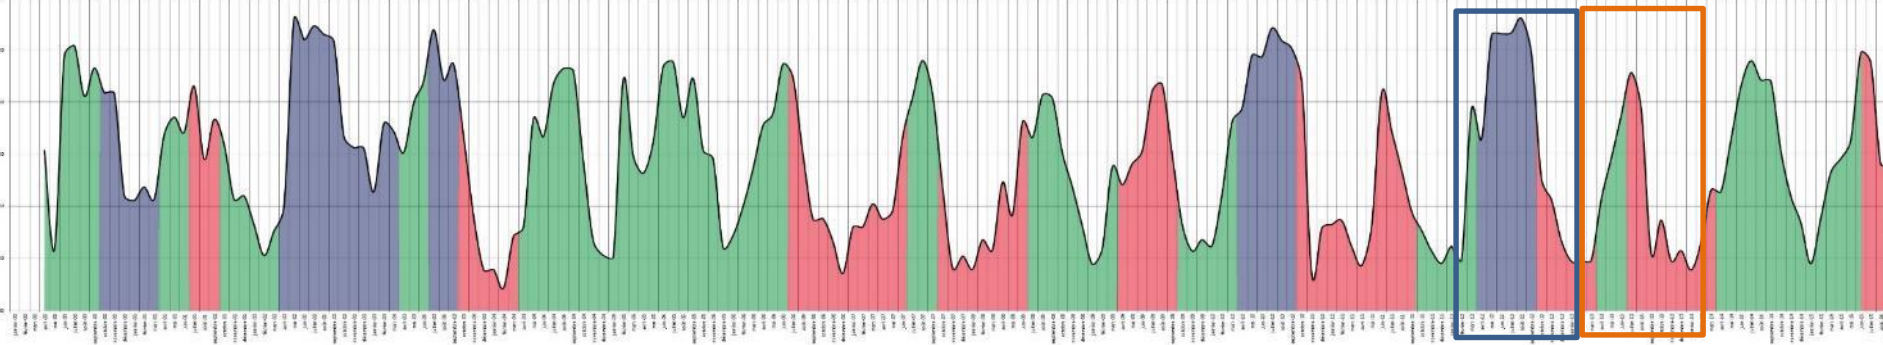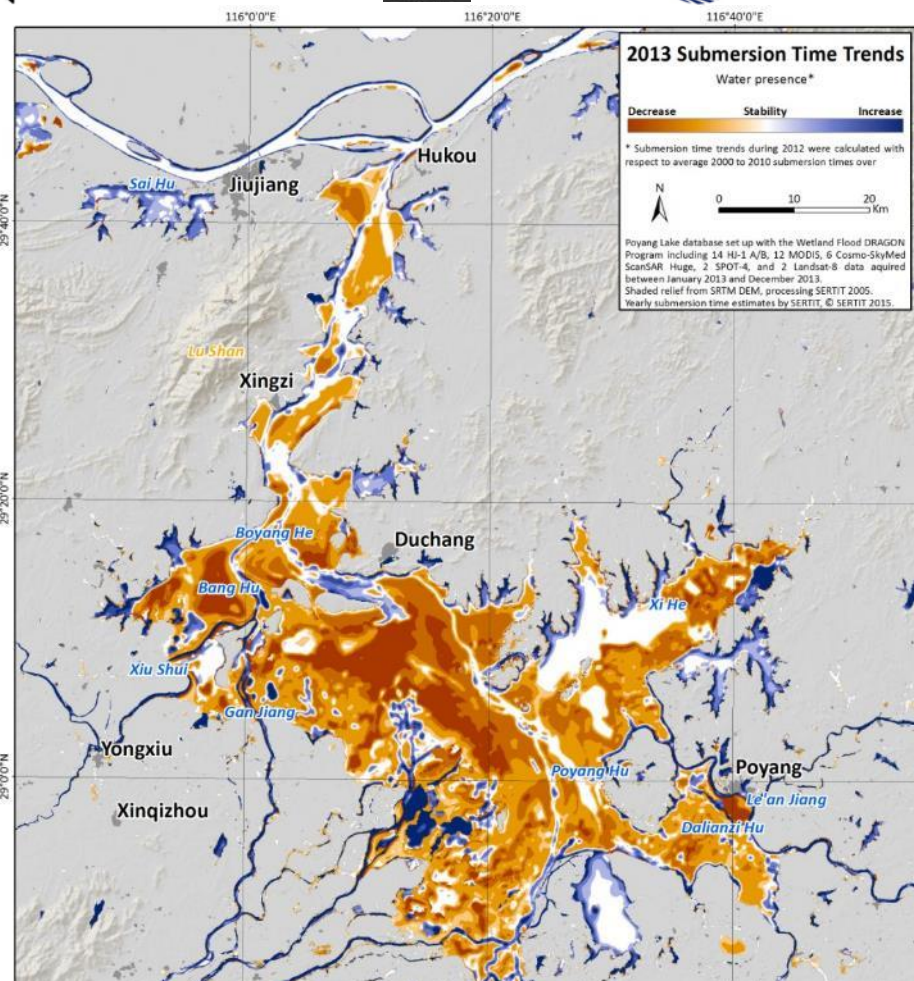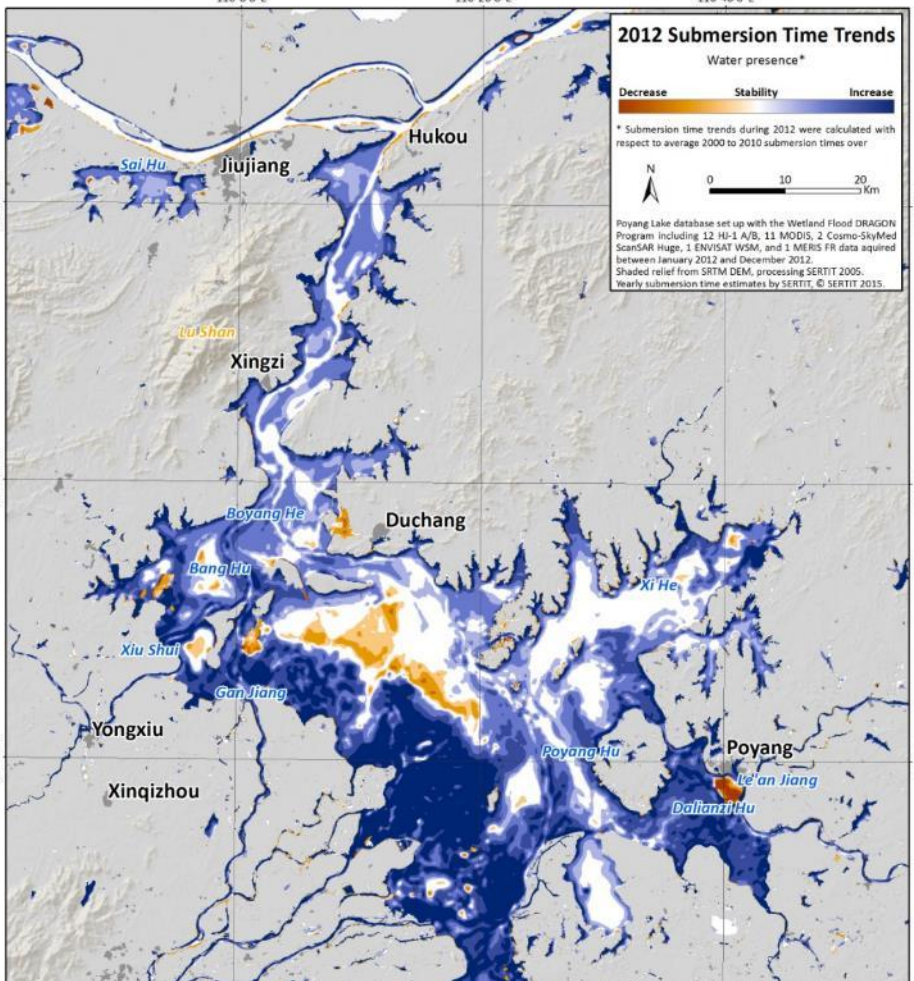


Monitoring sensitive areas based on EO SAR data: Alsatian Plain (France)

Plain flood monitoring
Biodiversity, sensitive agro natural systems

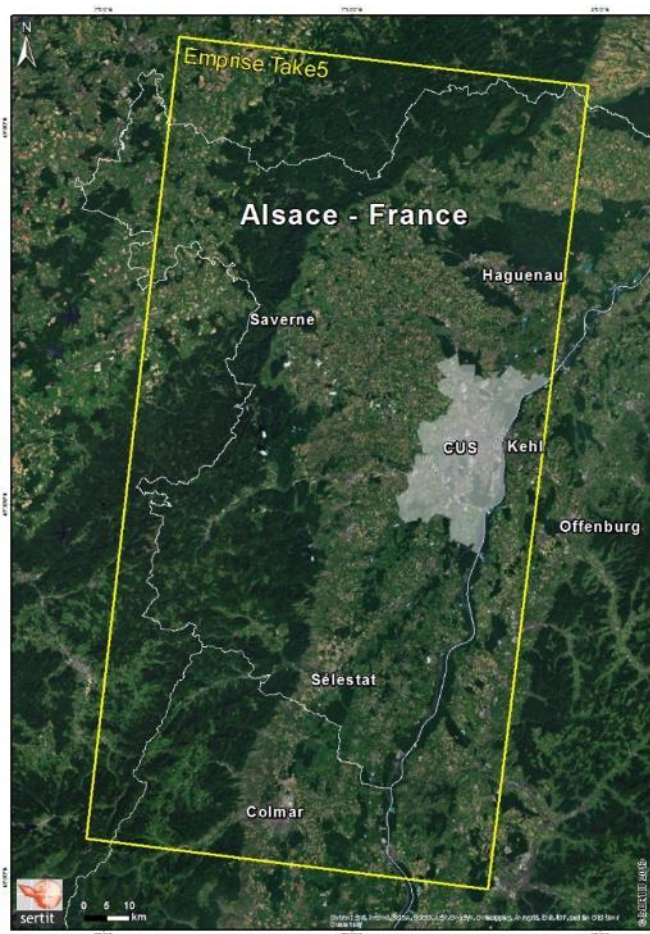


2 missions in field, synchronous with acquisition

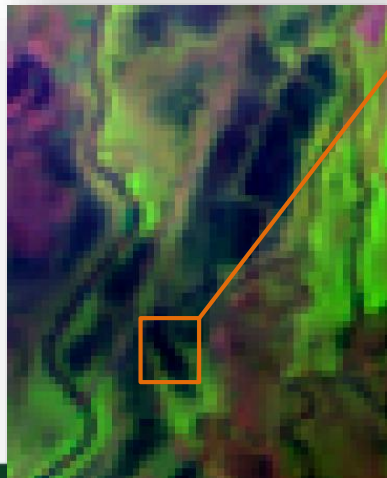

Monitoring sensitive areas based on EO data TerraSAR multimodes


Alsatian Plain (France)

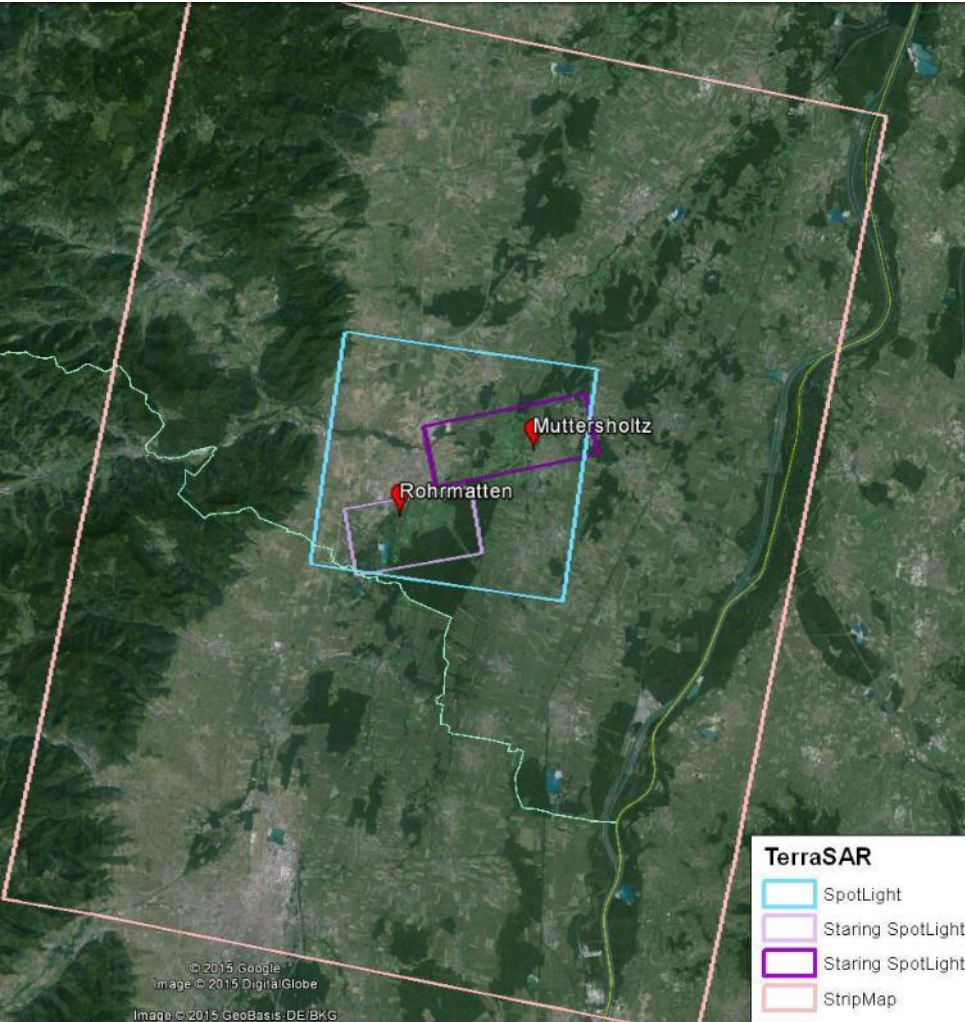


Strip Map mode : 30*50 km², 3m
SpotLight mode : 5*10 km², 1m
Staring SpotLight : 3*4 km², 25 cm



Ebermunster

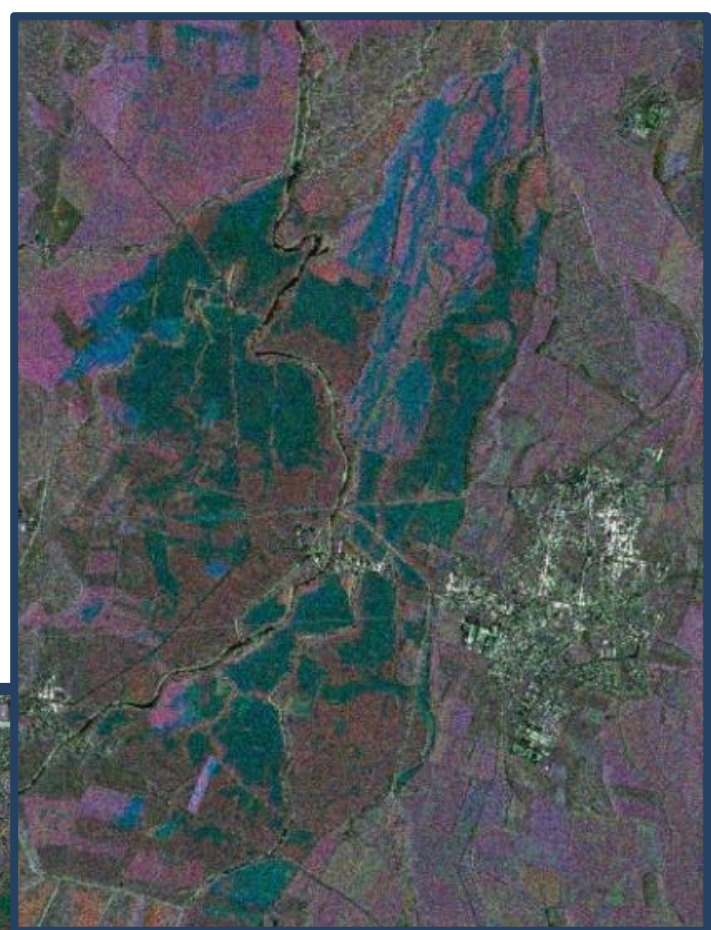

Muttersholtz

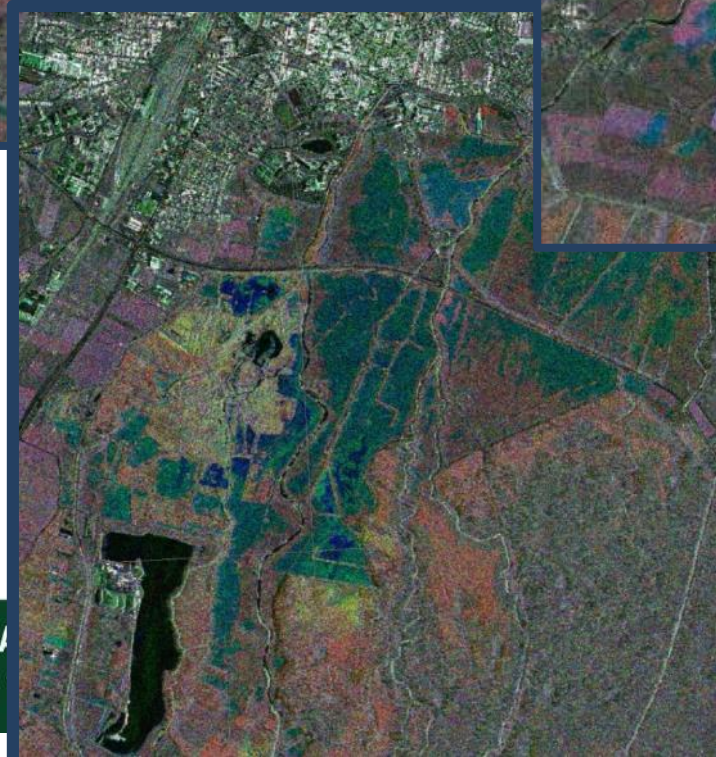


Rohrmatten

New TerraSAR X Staring Spot Light images



TerraSAR-X Staring Spotlight HH 20141205


05-12-2014

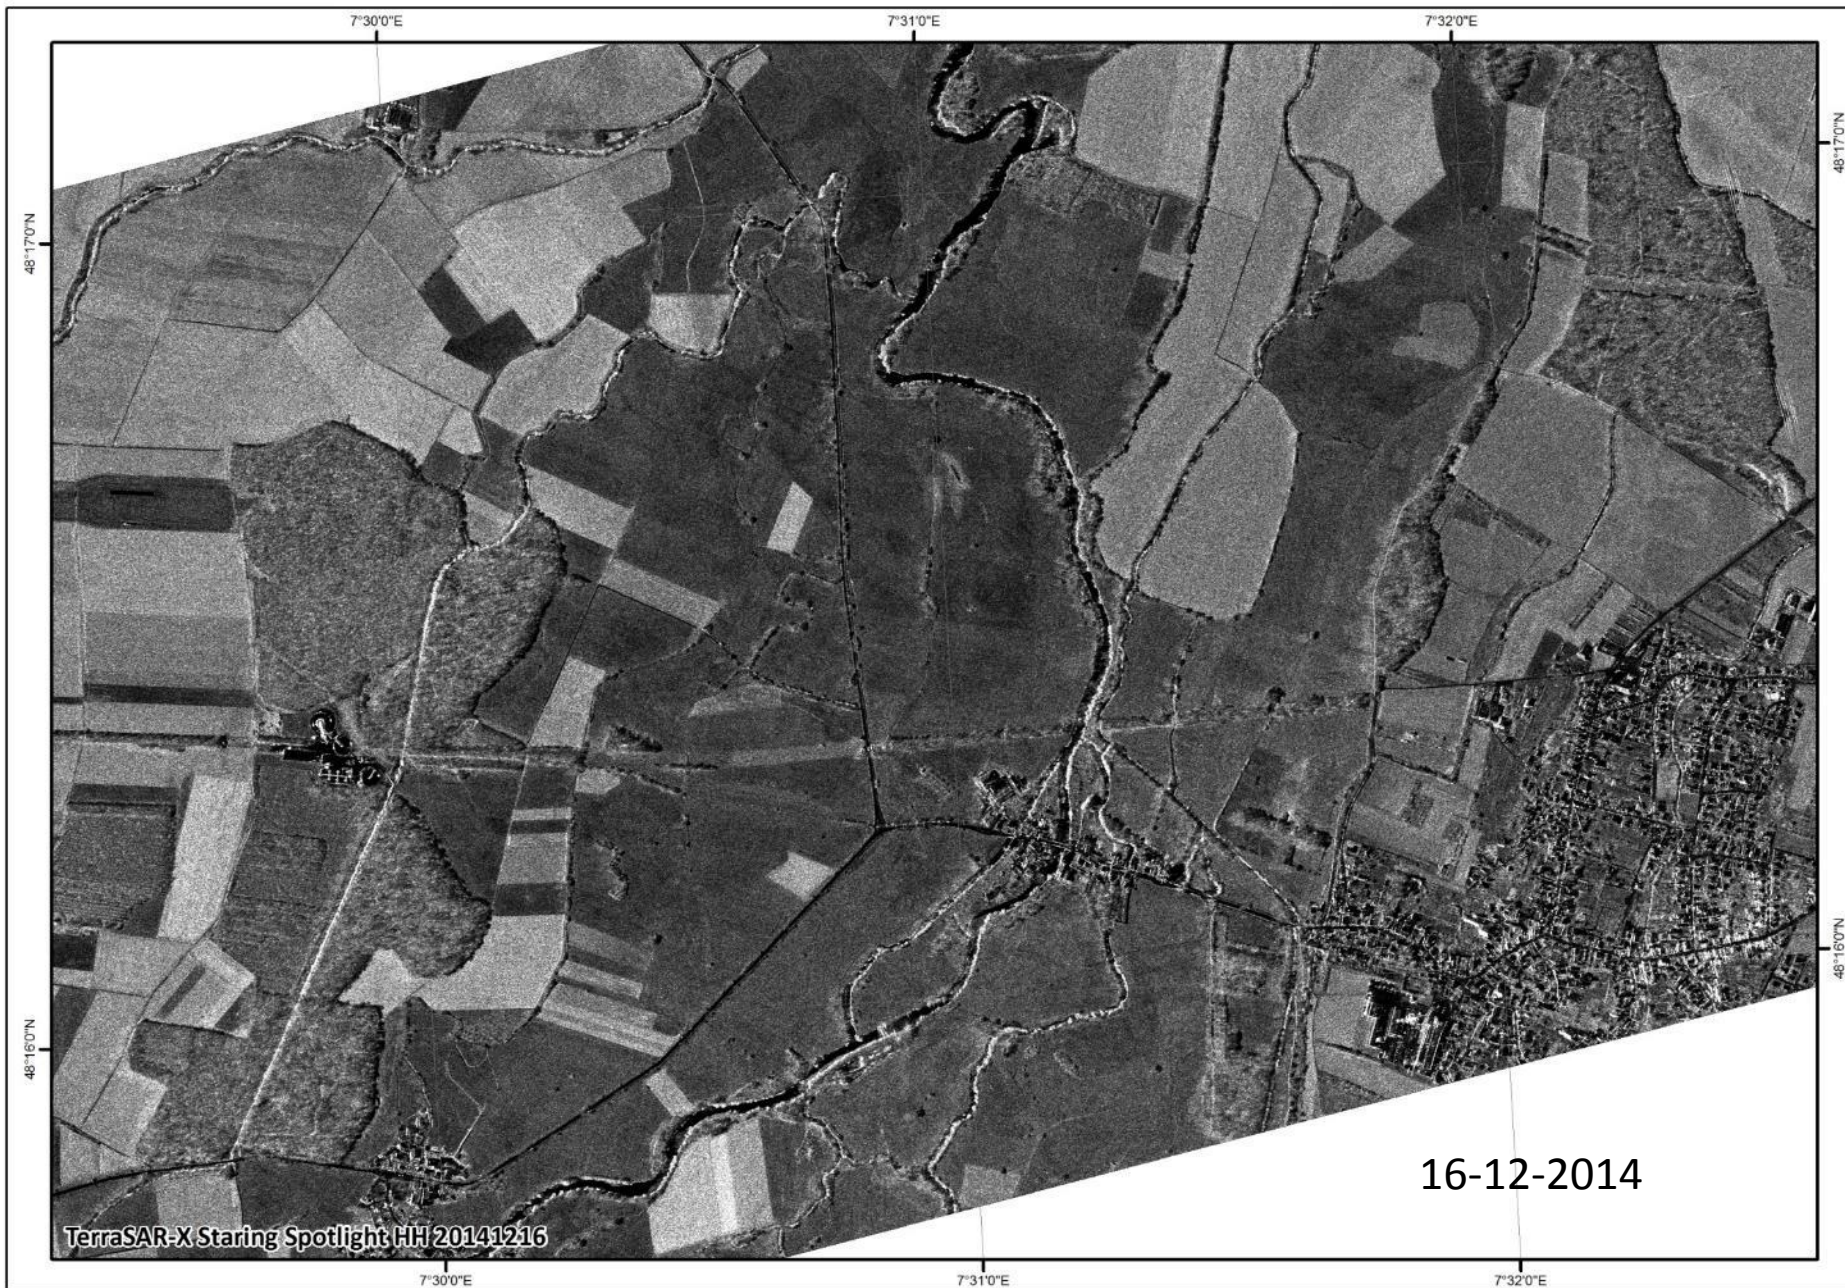

16-12-2014

TerraSAR-X Staring Spotlight HH 20141216


New TerraSAR X Staring Spot Light images

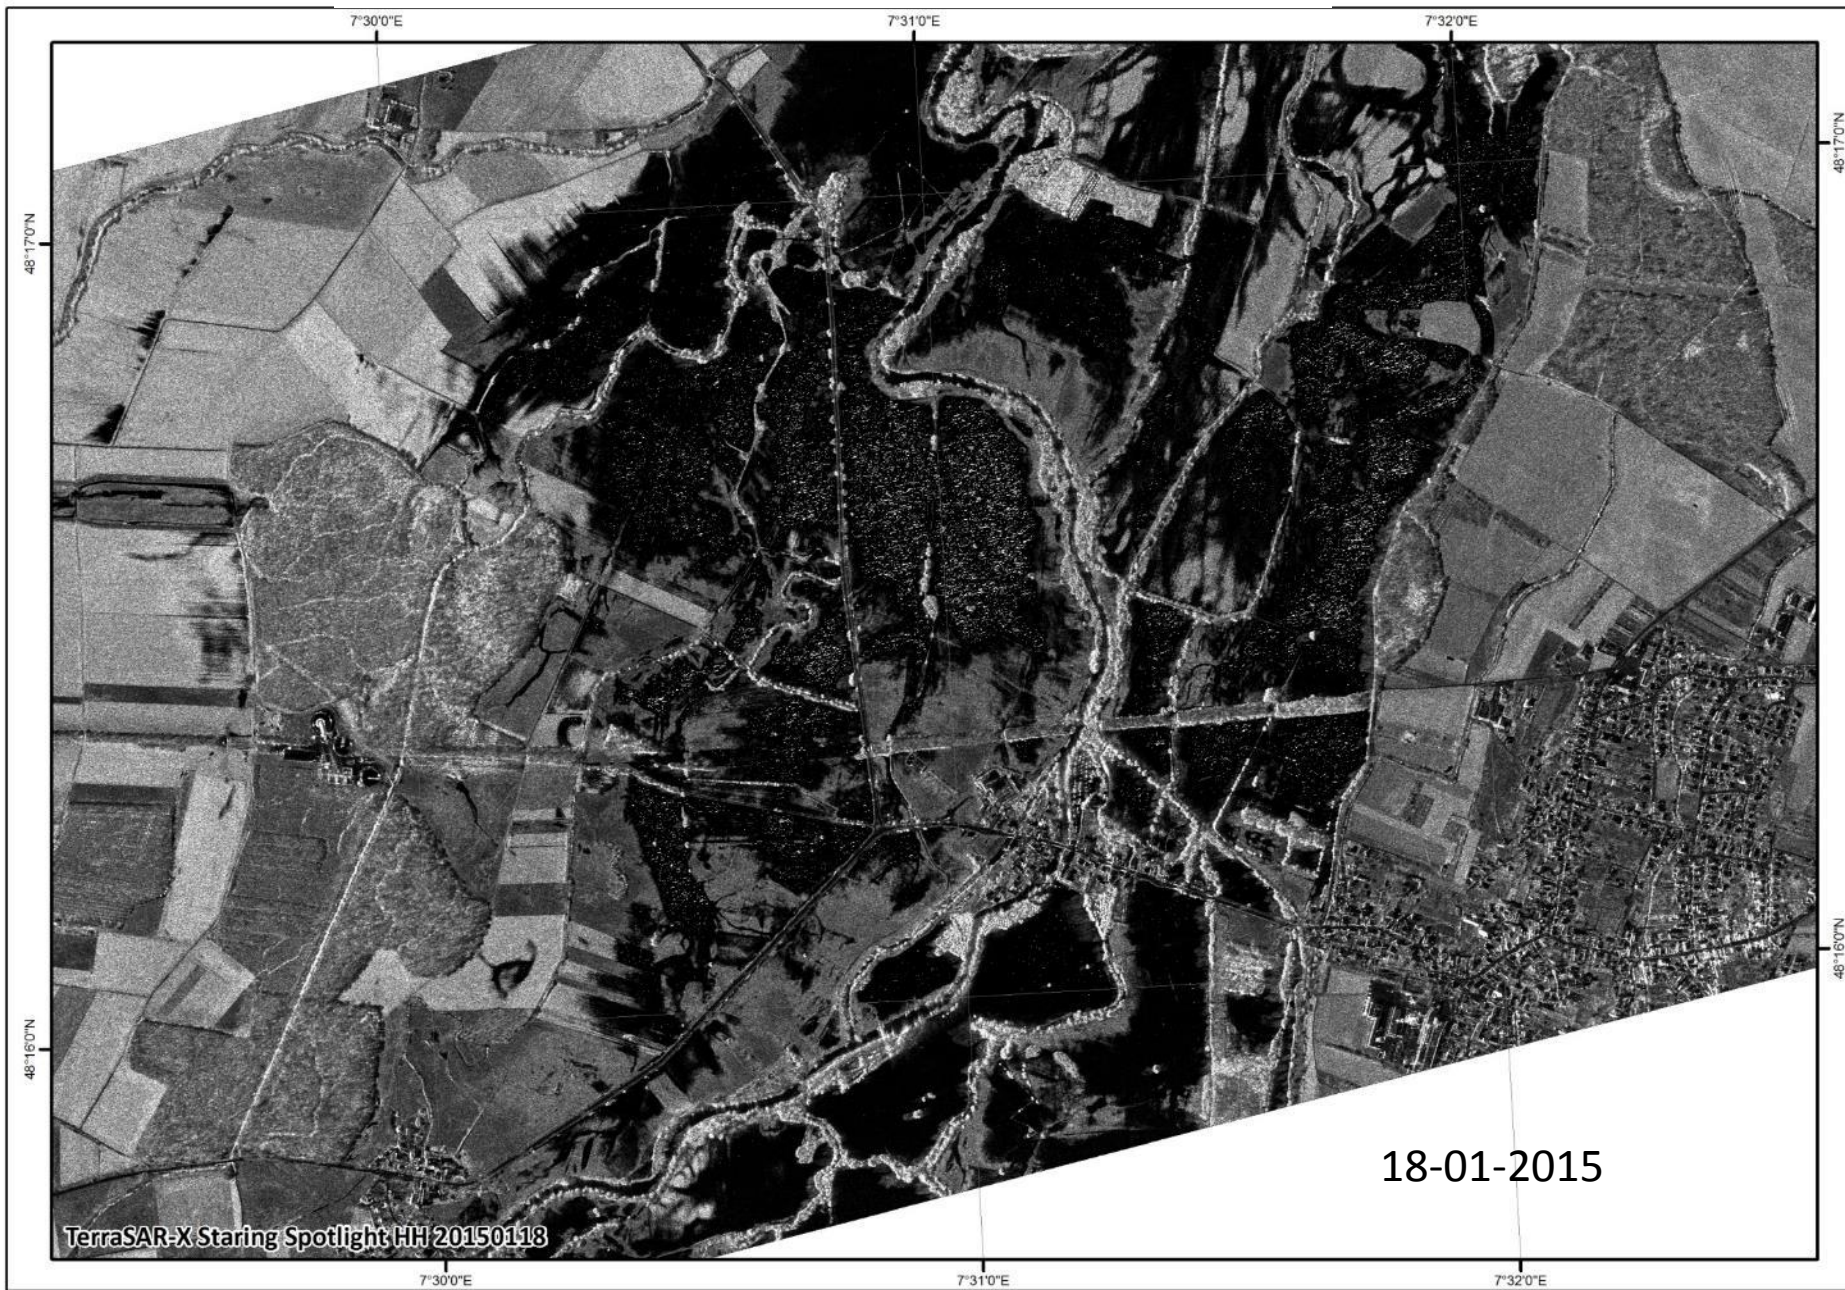





18-01-2015

Flood occurrence map for very small wetland areas

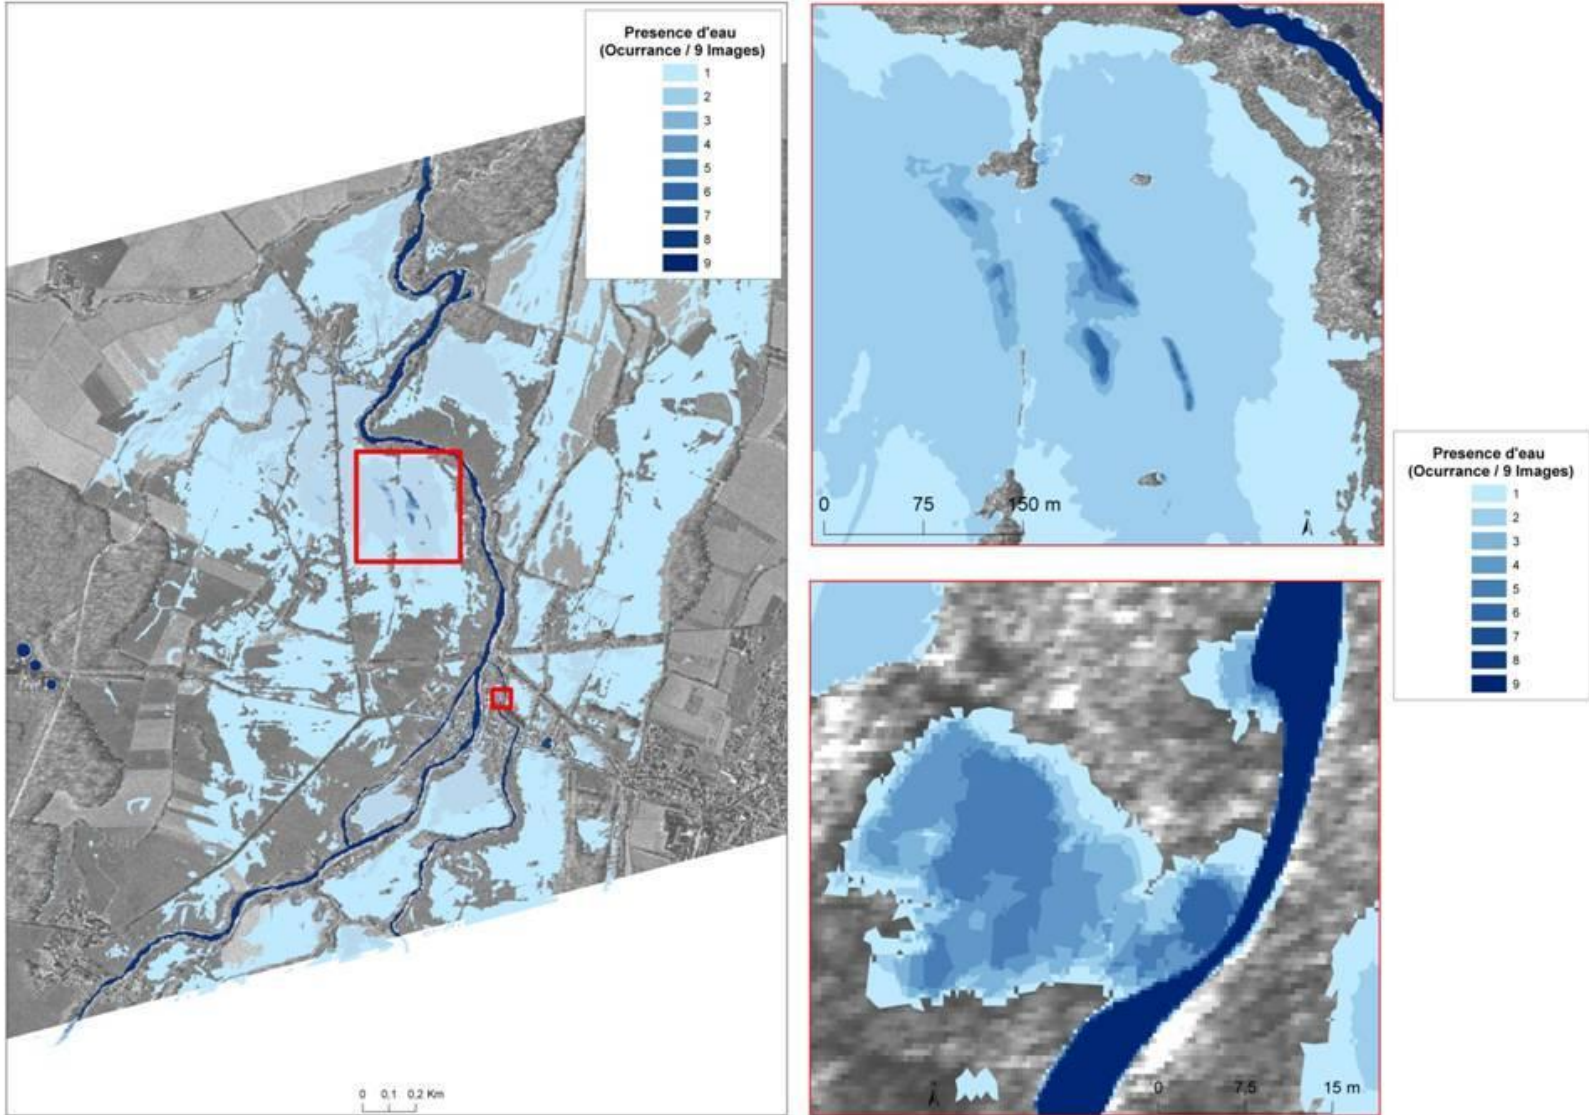


Water surface monitoring exploiting TerraSAR multimodes data

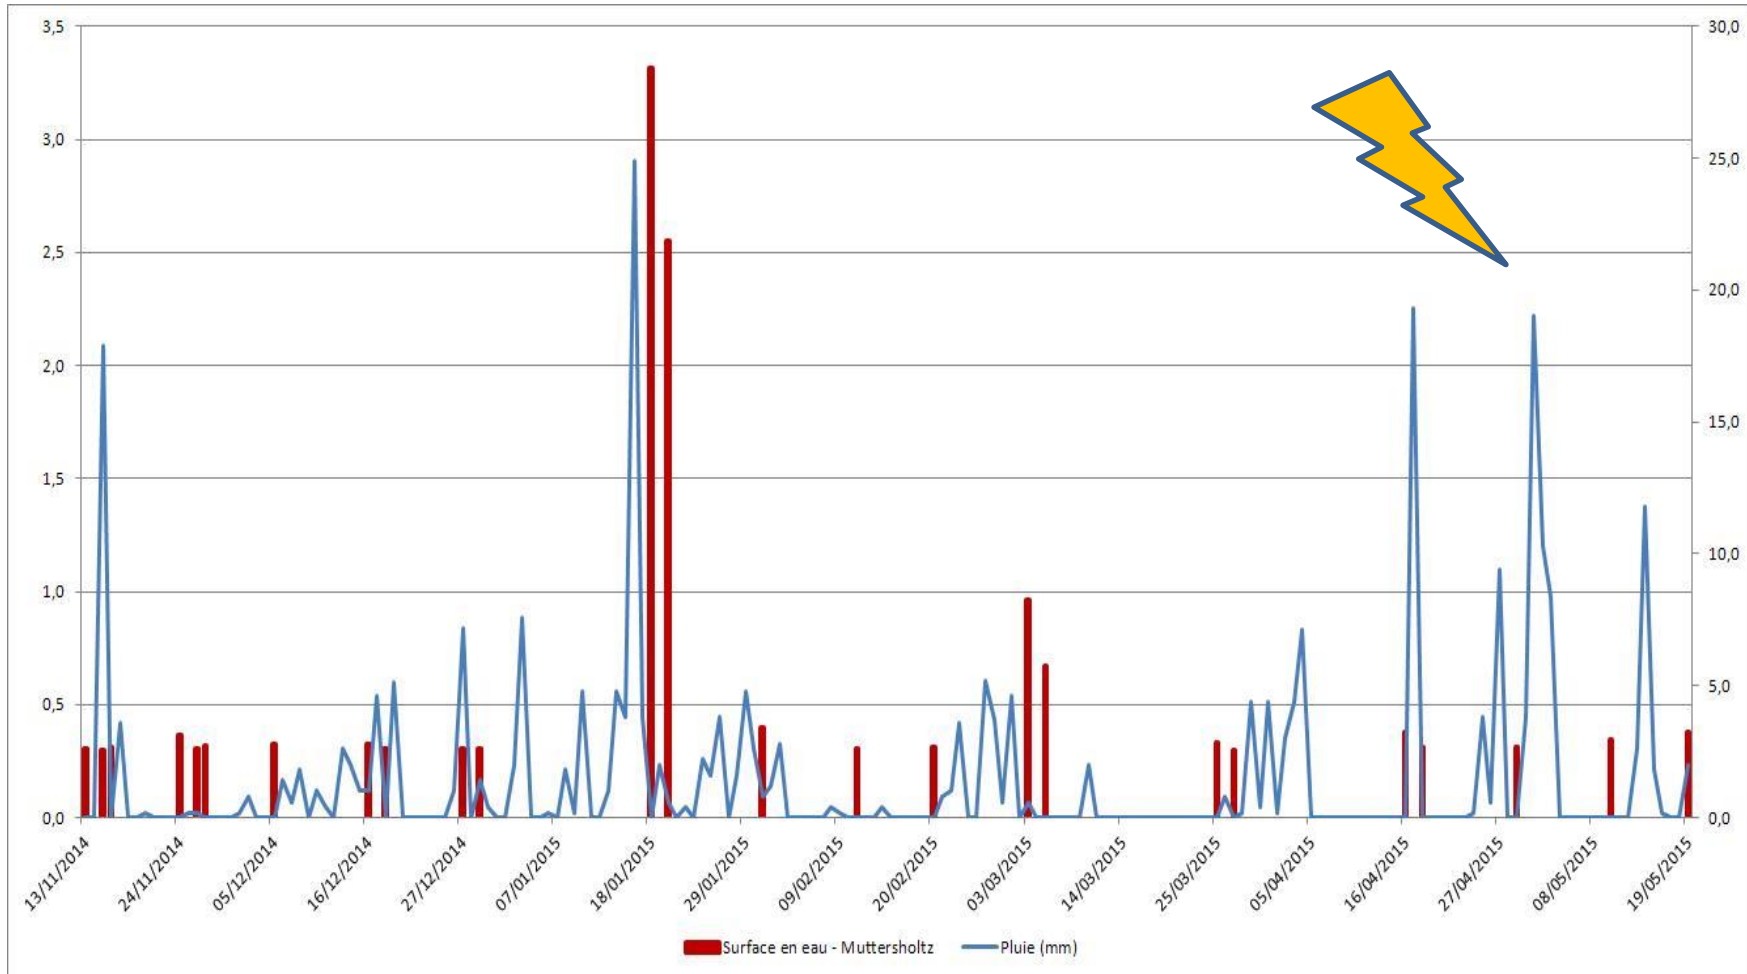

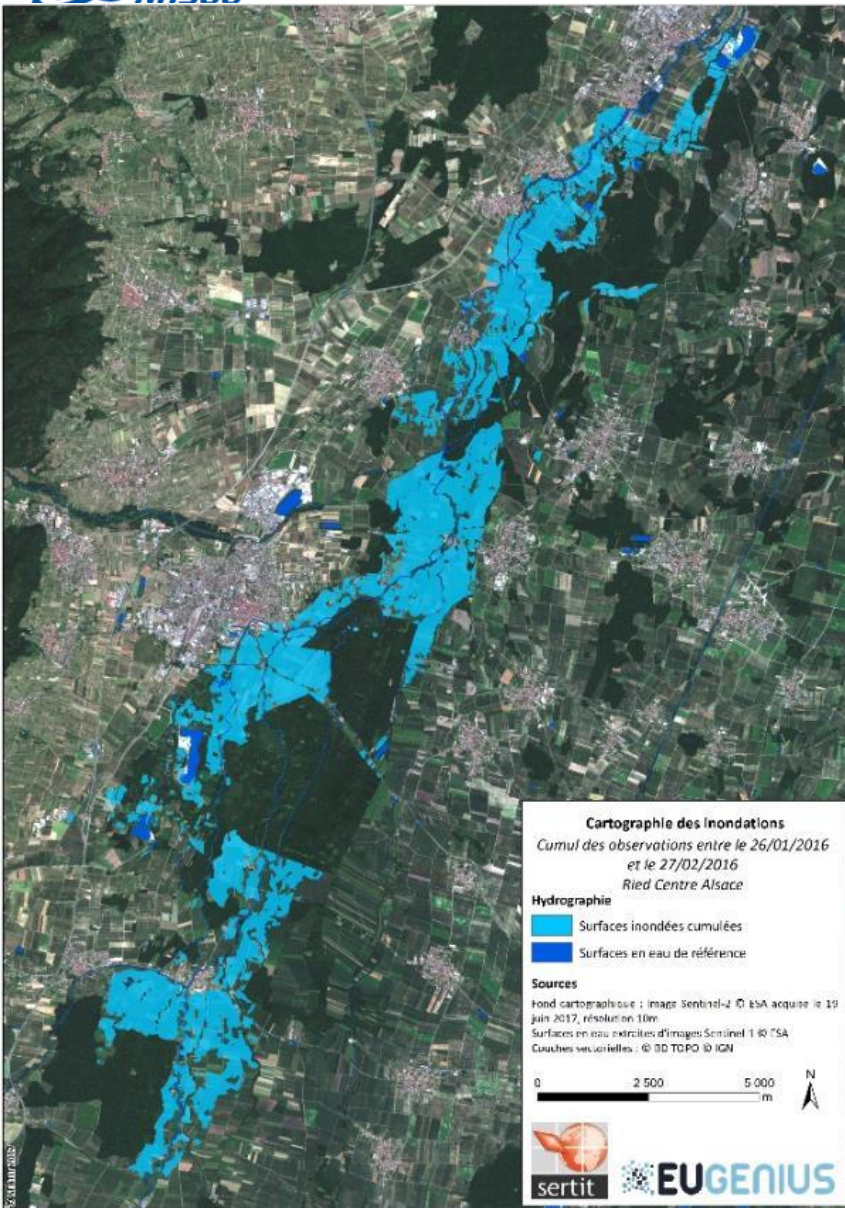


Exploiting Sentinel 1

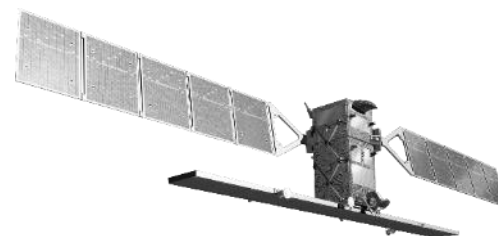


**Flood maximal extent
 (over the period of
 observation, ie one month
 26-01-2016 to 27-02-2016**




Exploiting Sentinel 1

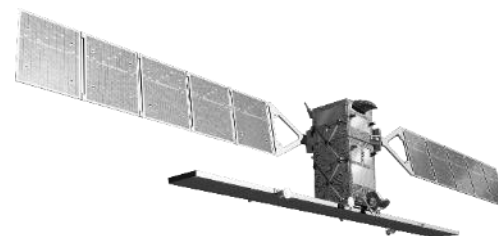


Flood Impact analysis

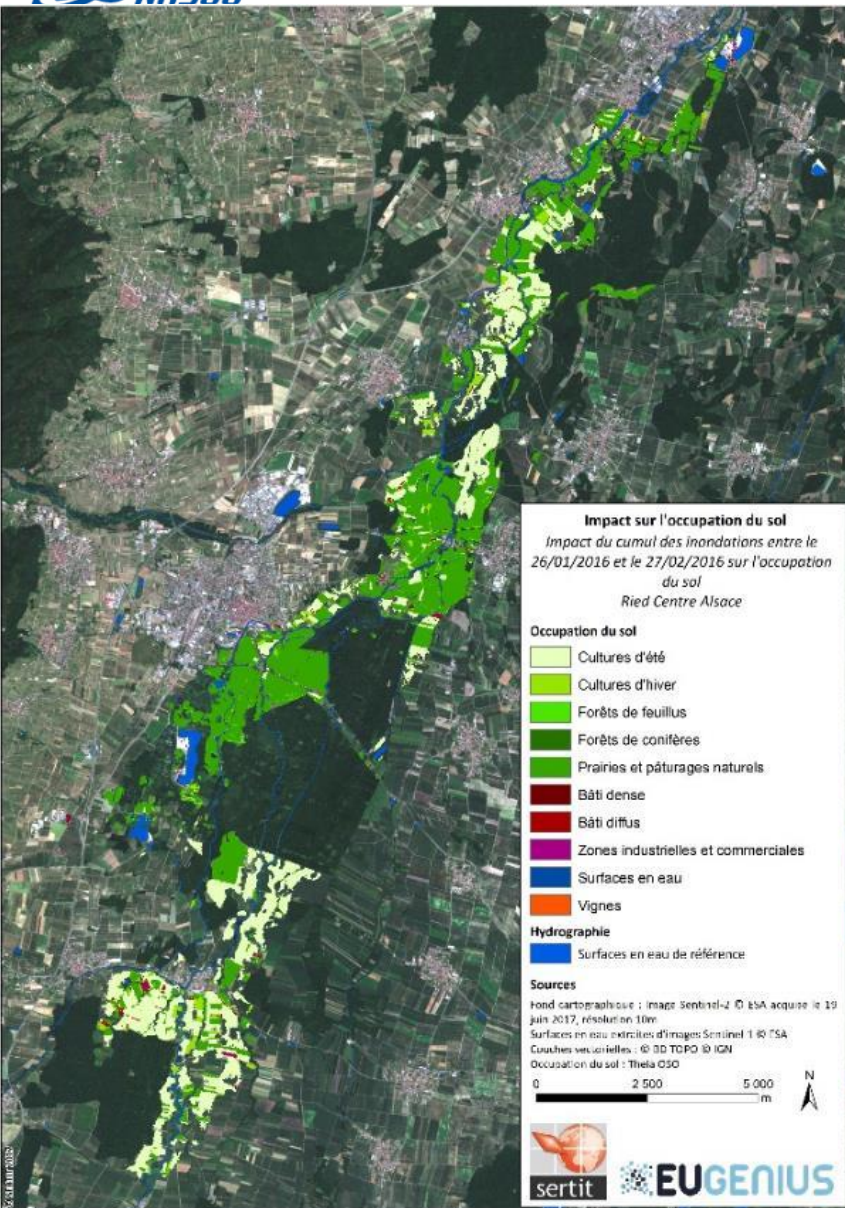

Exploiting Sentinel 1

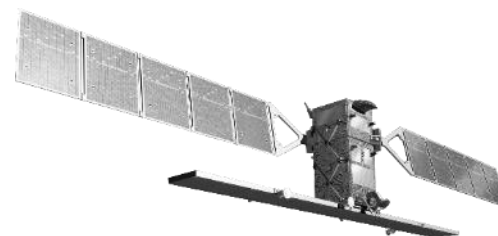

Inundation frequency during the exploited data set (occurrence)

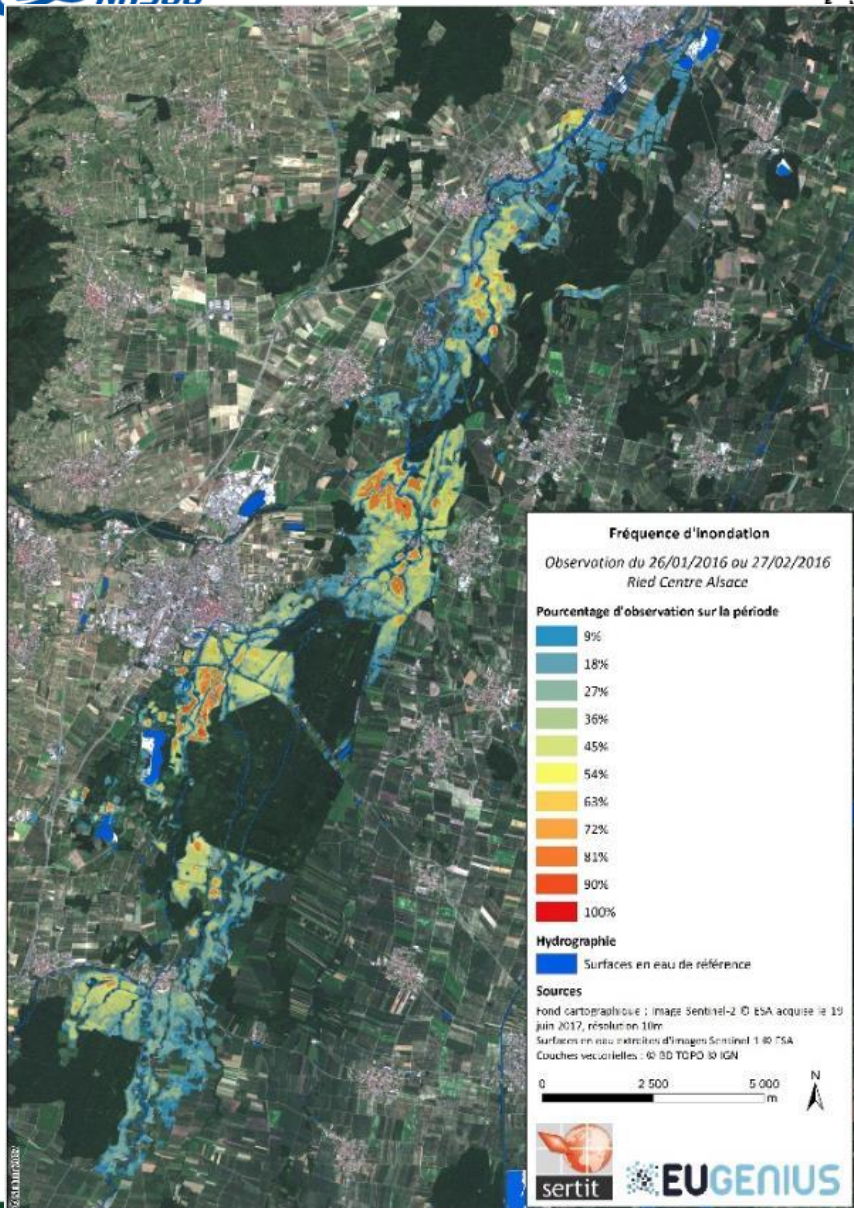

Presentation outline

Introduction: Why water bodies and flood mapping and monitoring

Flood and lakes in the landscape

Short cut of Physical basis for Water bodies mapping

Elements for water bodies extraction based on SAR imagery

SAR sensors for water bodies and/or flood mapping

- **Past mission**
- **On going missions**
- **Future missions**

Flood plain and lakes monitoring

- **Short term Monitoring**
- **Long term monitoring**
- **Meteo climato parameters**


Concluding remarks

EO derived information and modelling


Envisat derived information as an input for validation of hydraulic models



ERS-2, Envisat

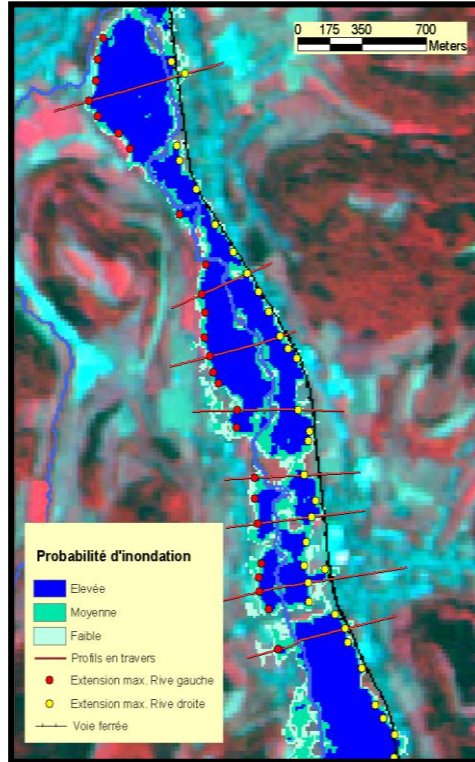


Extraction of classes of flood extent probabilities

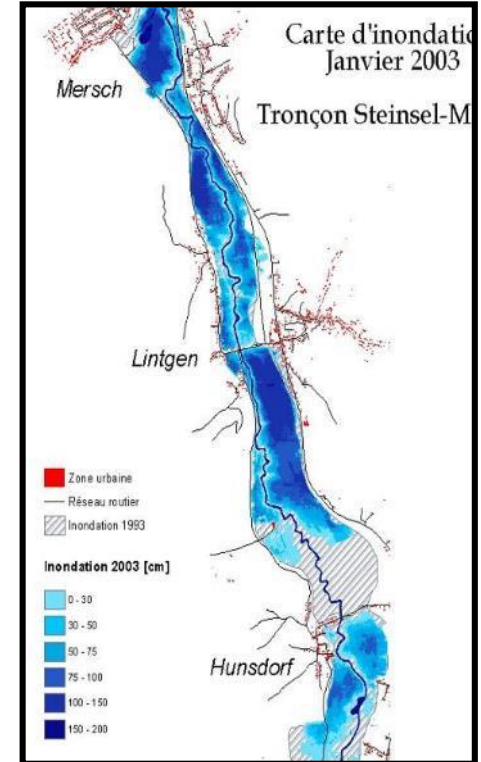

Model calibration

Projet Tech Spin (Magten et al., 04 ; Henry, 04)

Optical VHR : post crisis hydrological analysis for modelling

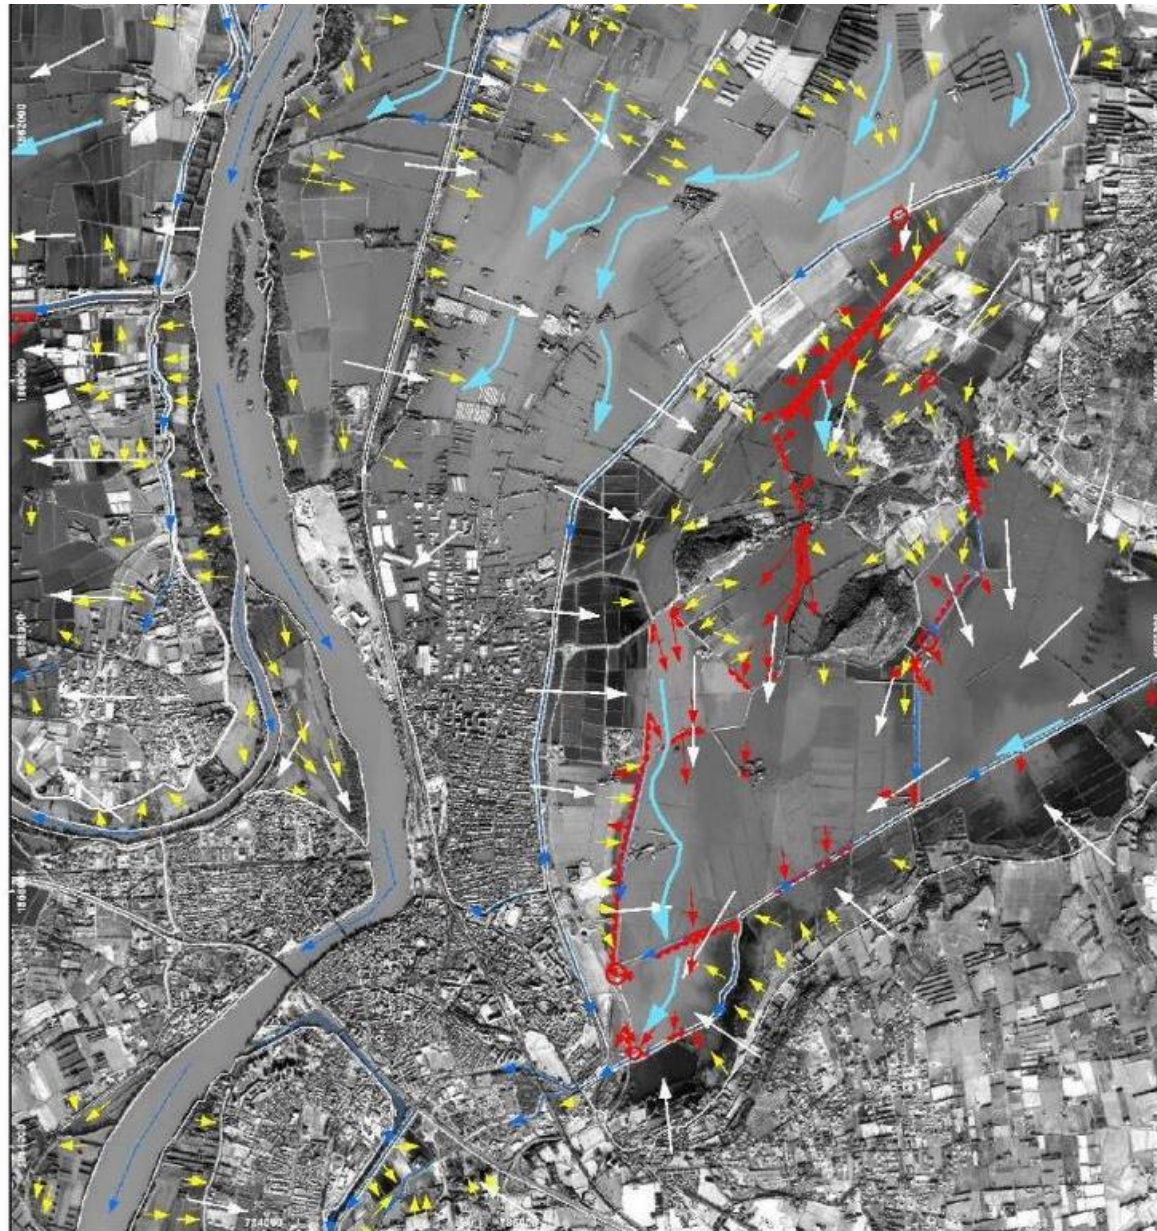

**South France flood event,
December 2003**


**Post crisis exploitation of
Ikonos crisis data**

Identification of

- Water paths
- Flow trends

**Allenbach & Battiston
2005, MEDD**

Optical VHR : post crisis hydrological analysis for modelling

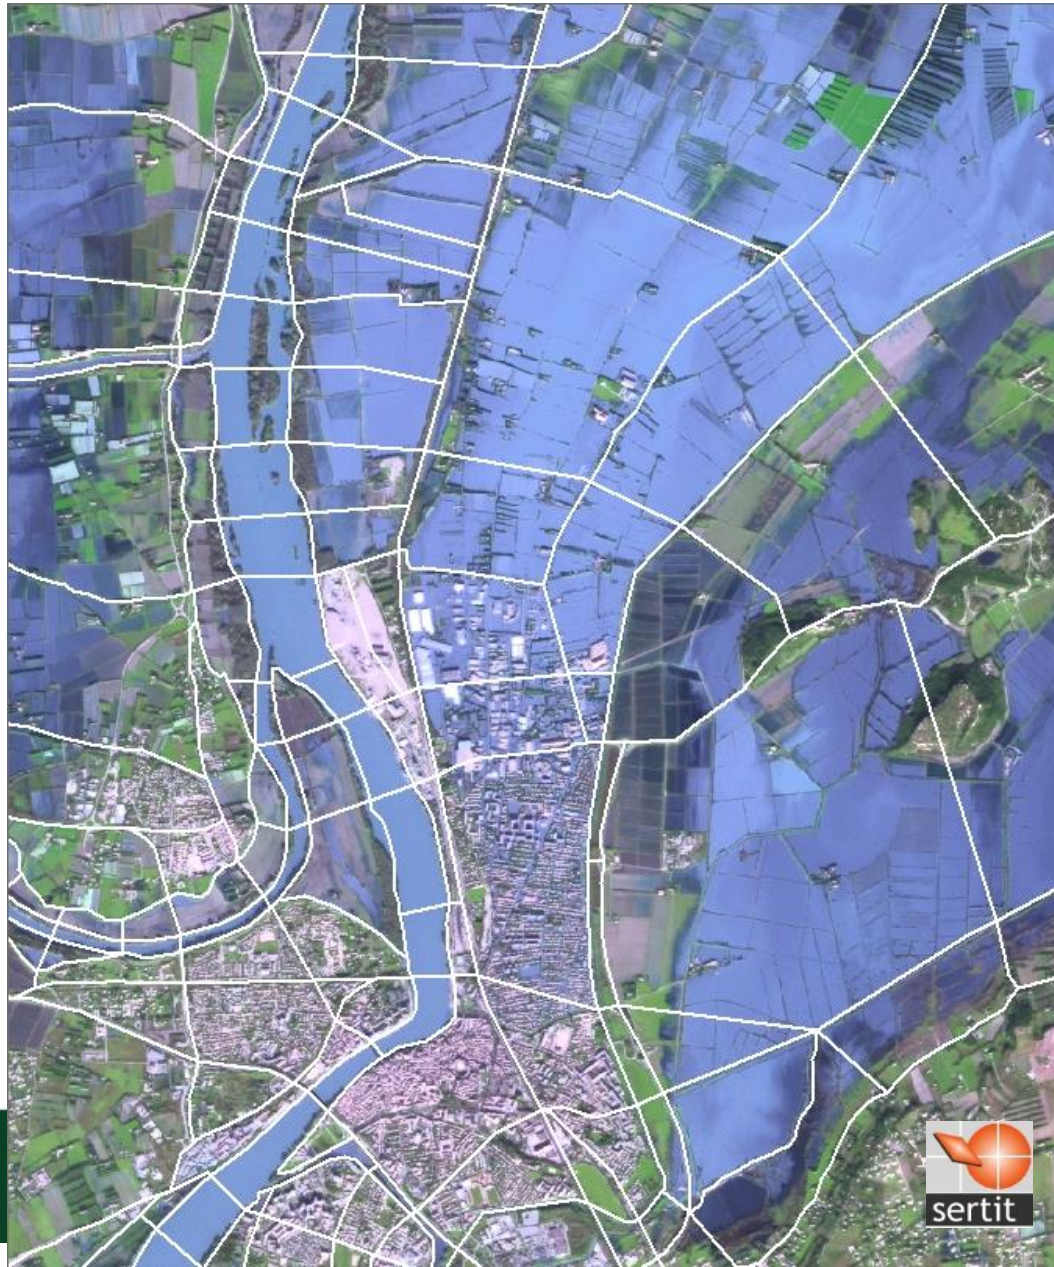

South France flood event, December 2003

Post crisis exploitation of SPOT5 crisis data

« casiers » hydraulical subdivisions

SPOT 5 :
functionnal ones

BCEOM box:
theorical ones

Allenbach & Battiston 2005, MEDD



SE


H. YESOU 2017

“龙计划4”高级陆地遥感国际培训班

2017年11月20日—11月25日 云南师范大学, 中国, 昆明

EO derived information and impact forecast

Potential impact of the October 2006 extent

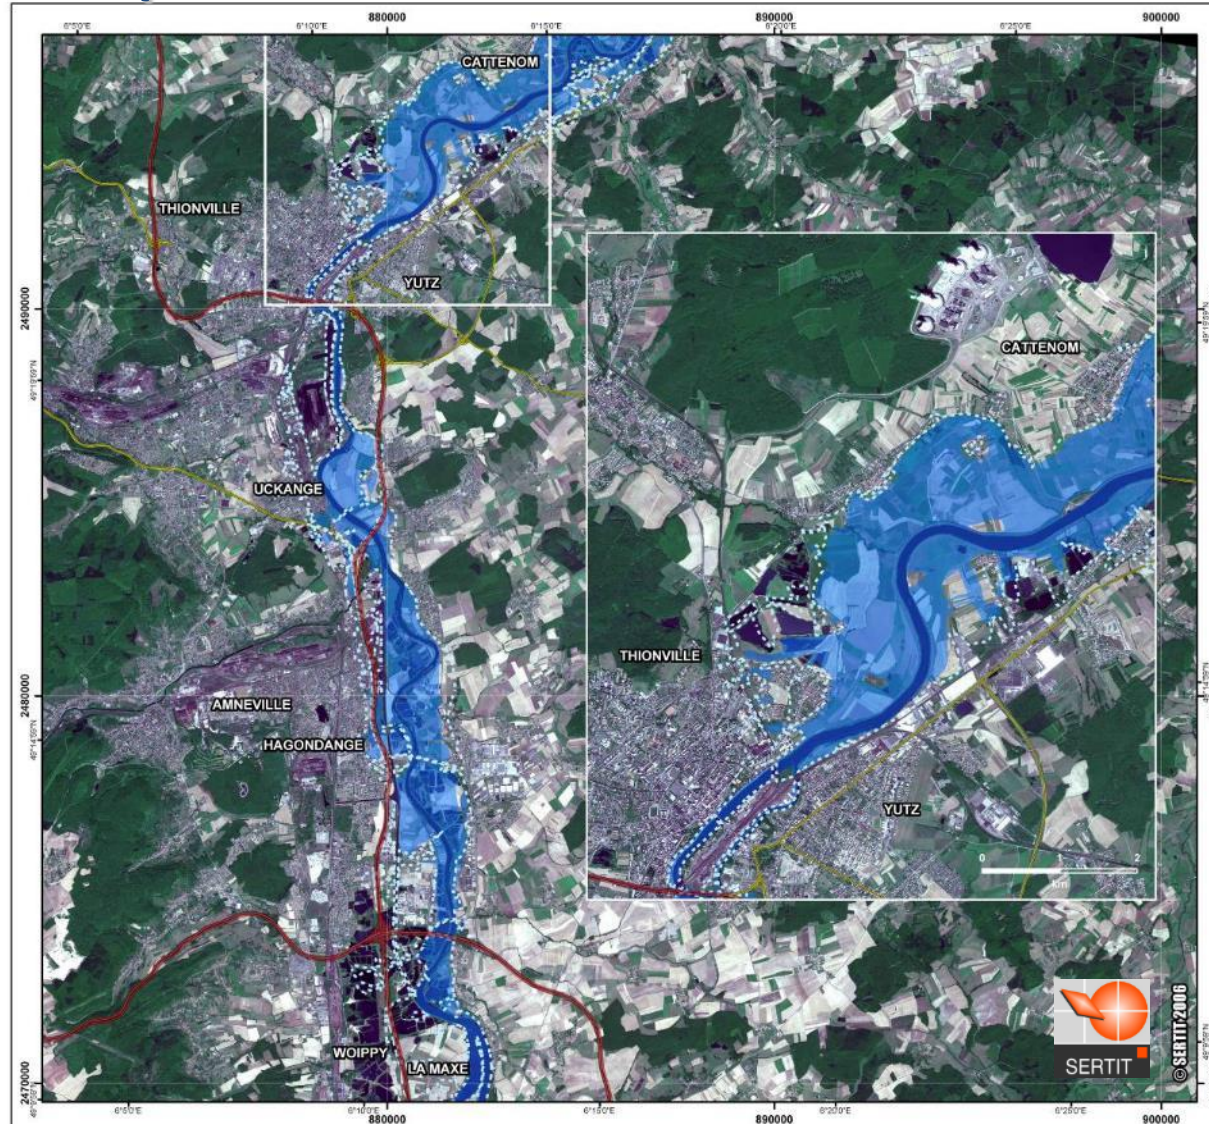

EO derived information and impact forecast


- 6 October – 11:00: Experimental product using PREVIEW dataset is received at COZ

Estimation of:

- . Affected population
- . Industrial Areas
- . Sensitive points as SEVESO and High Voltage Transformer

- Night of 6 to 7 October: the flood maximum crosses the border (France – Luxembourg – Germany)

- 7 October: 1st crisis EO data acquisition

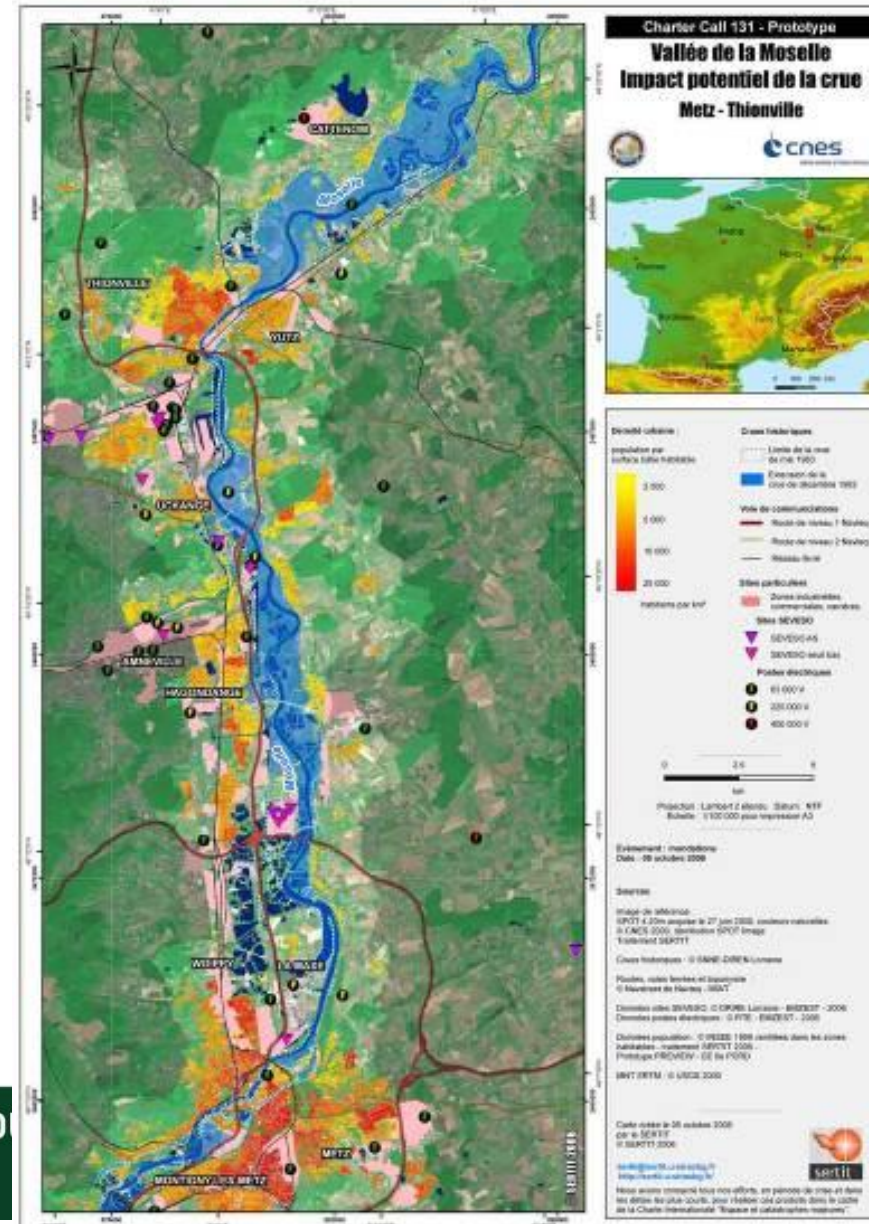

Concluding remarks

EO data, optical/SAR can provide very valuable information on ongoing flood event

EO archive very rich for analyzing past event, particularly ESA archive

Not opposition/fight between optical/sar data these are to be exploited in synergy

Concluding remarks

Recommendations: been pro-active

- **Explore EO archive**
- **Realize a more systematic monitoring of flood prone areas**
- **Propose future scenarios exploiting Medium/High resolution products in synergy with VHR data (Cosmo Skymed, TerraSAR and Pleiades)**
 - **MR_HR: identification and monitoring of water flow**
 - **VHR : focus on sensitive areas (urban areas, industrial sites)**



Floods & Lakes Monitoring

SAR part

ESA-MOST Dragon 4 Cooperation

ADVANCED LAND REMOTE SENSING INTERNATIONAL TRAINING COURSE

“龙计划4”高级陆地遥感国际培训班

Dr Hervé YESOU

20-25 November 2017 | Yunnan Normal University
Kunming, Yunnan Province, P.R. China

2017年11月20日—11月25日
云南师范大学, 中国, 昆明

D2S -L2

Tuesday 25 of November 2017